

Ground Washer Crema C series

PLAYLITE®

Application

They are ideal for applications such as in hotels, houses, gardens, parks, plazas for the ground washer decoration illumination of path or wall.



CE

IK10 IP67


SS316 cover




3 Years Warranty

One IP67 lamp body is compatible with 6 covers



Recessed luminaire with washer emission, equipped with frosted diffuser and covers with different open holes, ensuring good washer light, the washer light for the wall or ground is even and smooth, ideal for the places where should be designed with anti-glare and good washer decoration lighting.

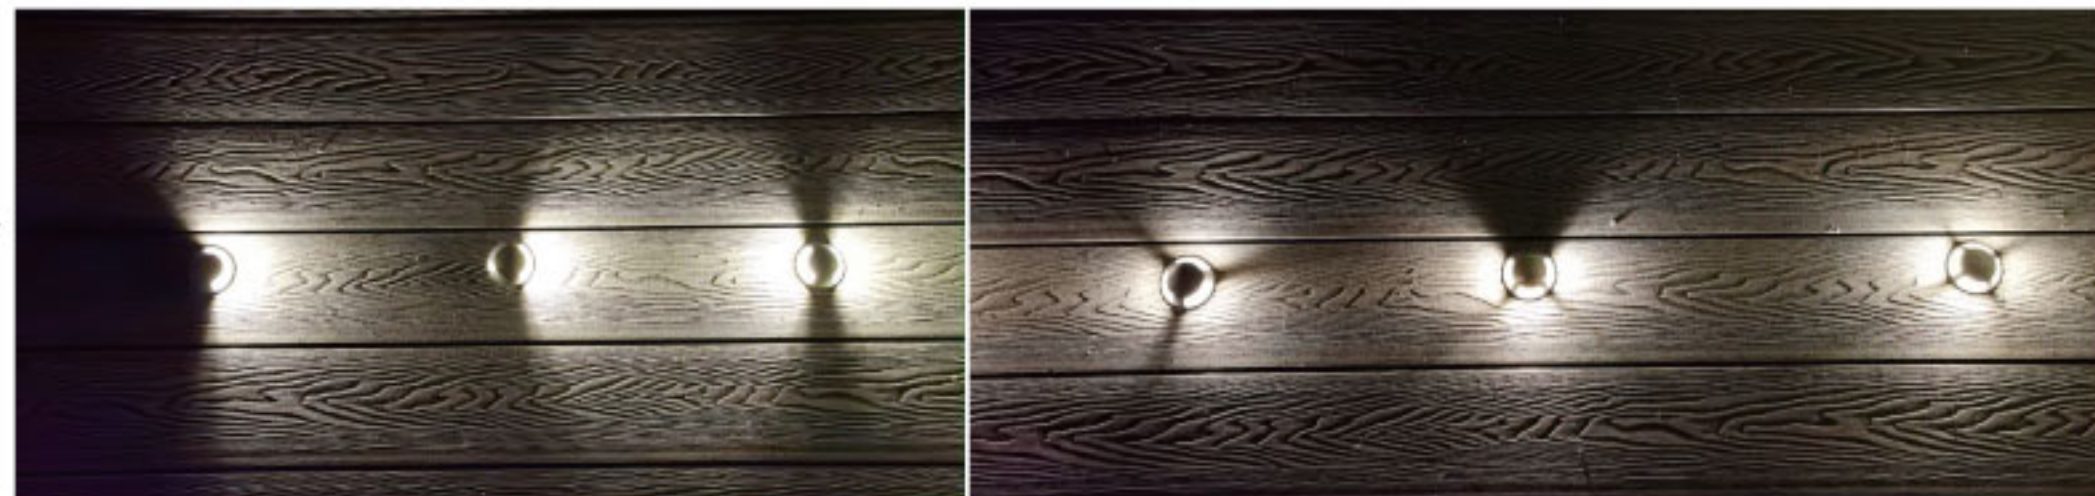

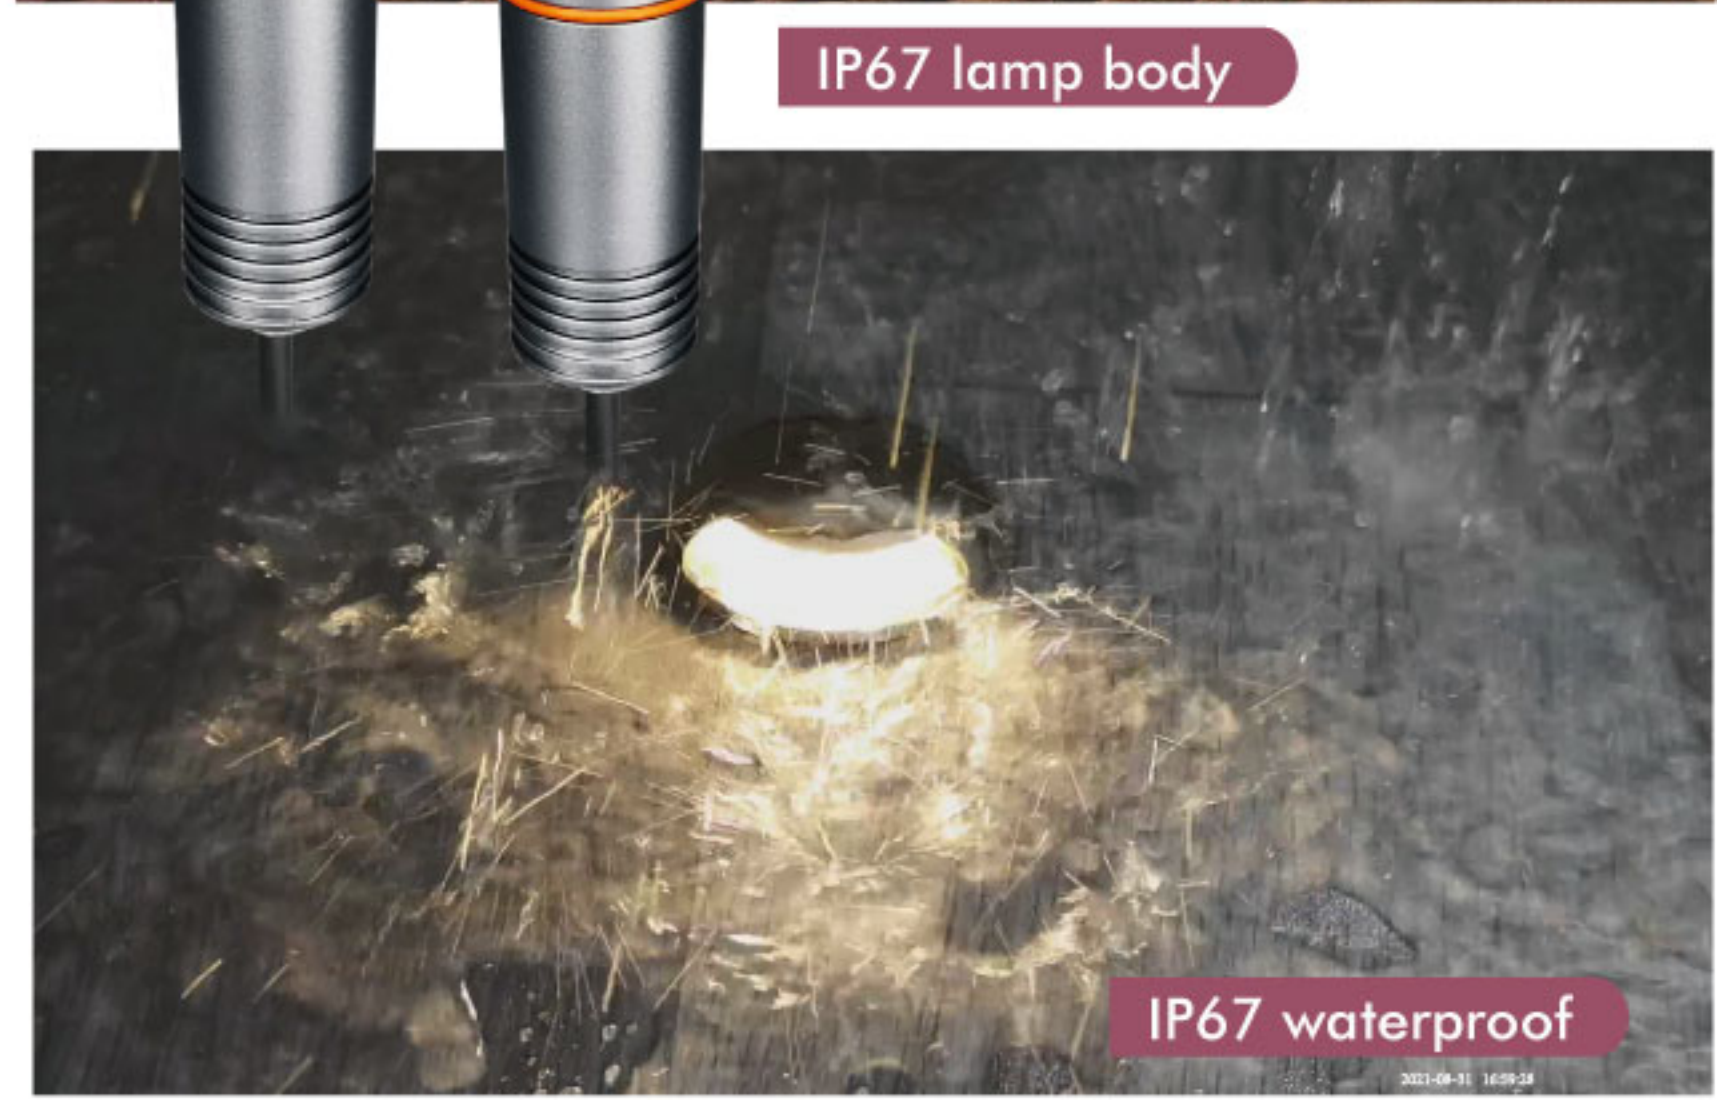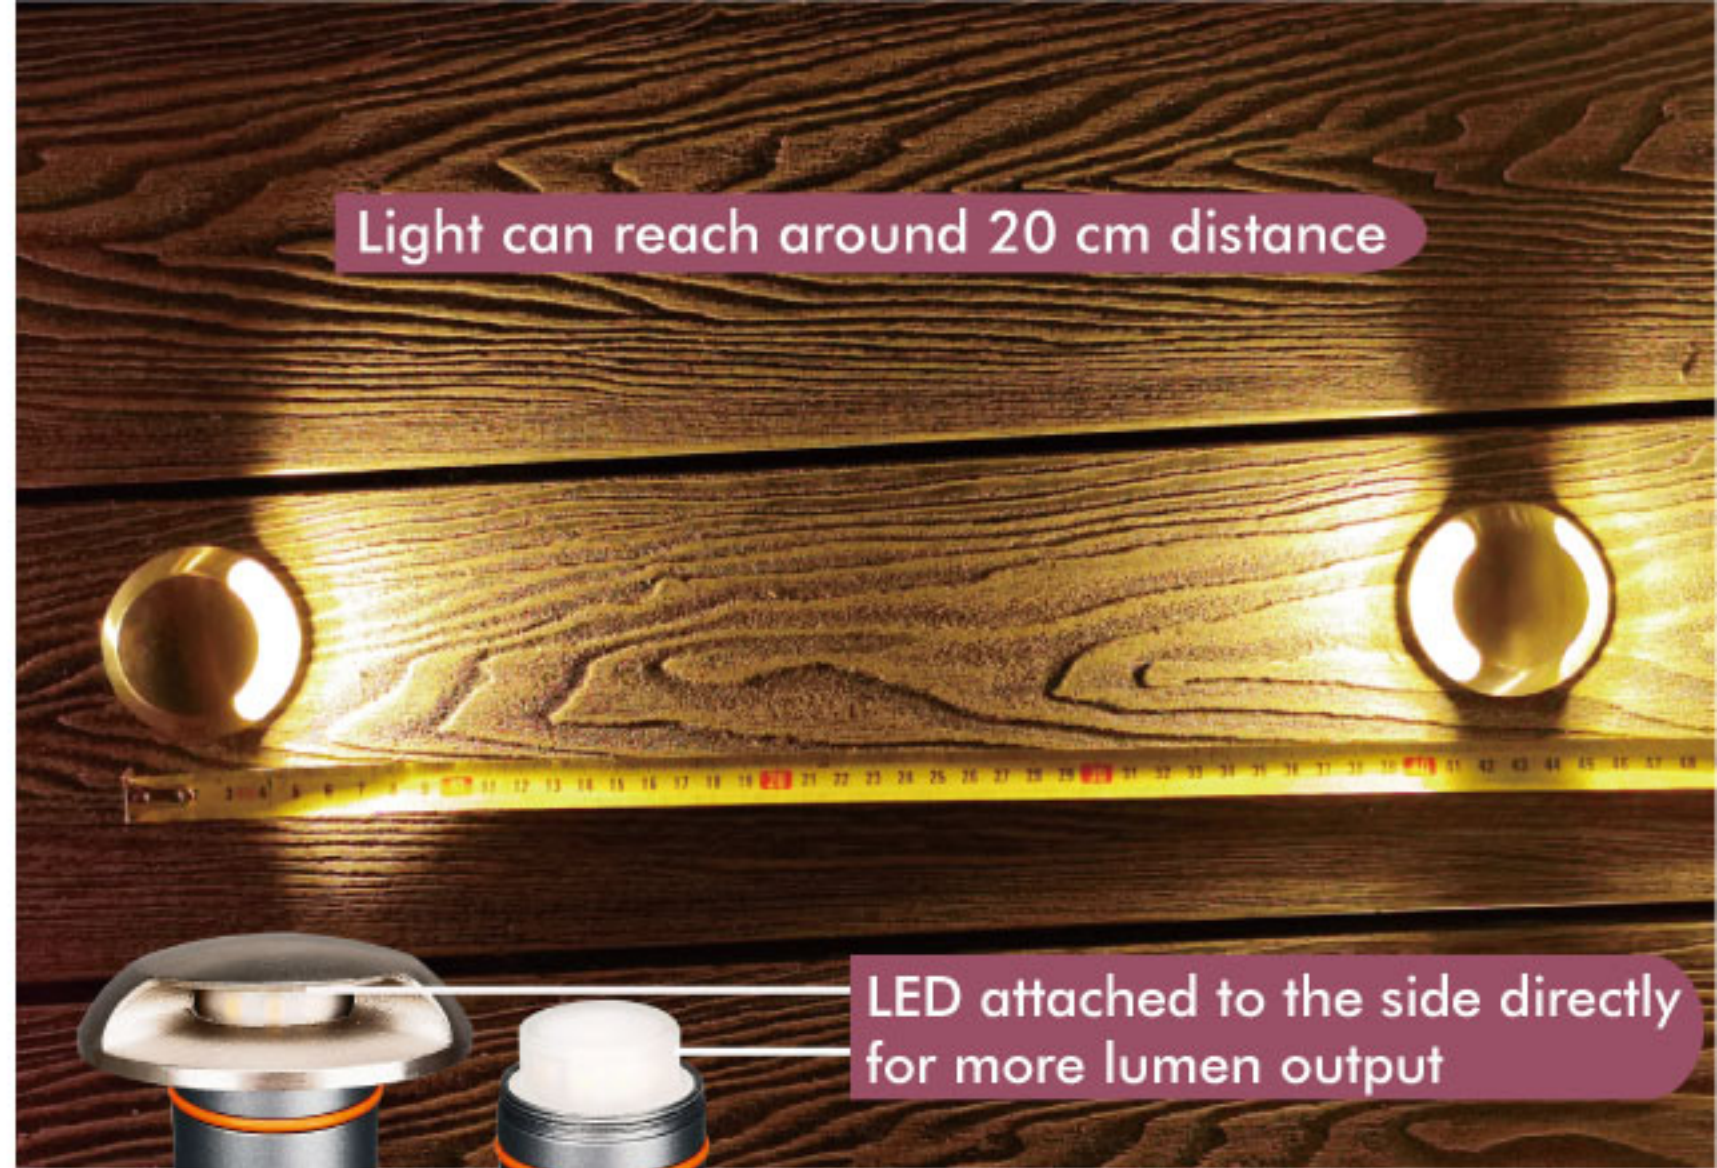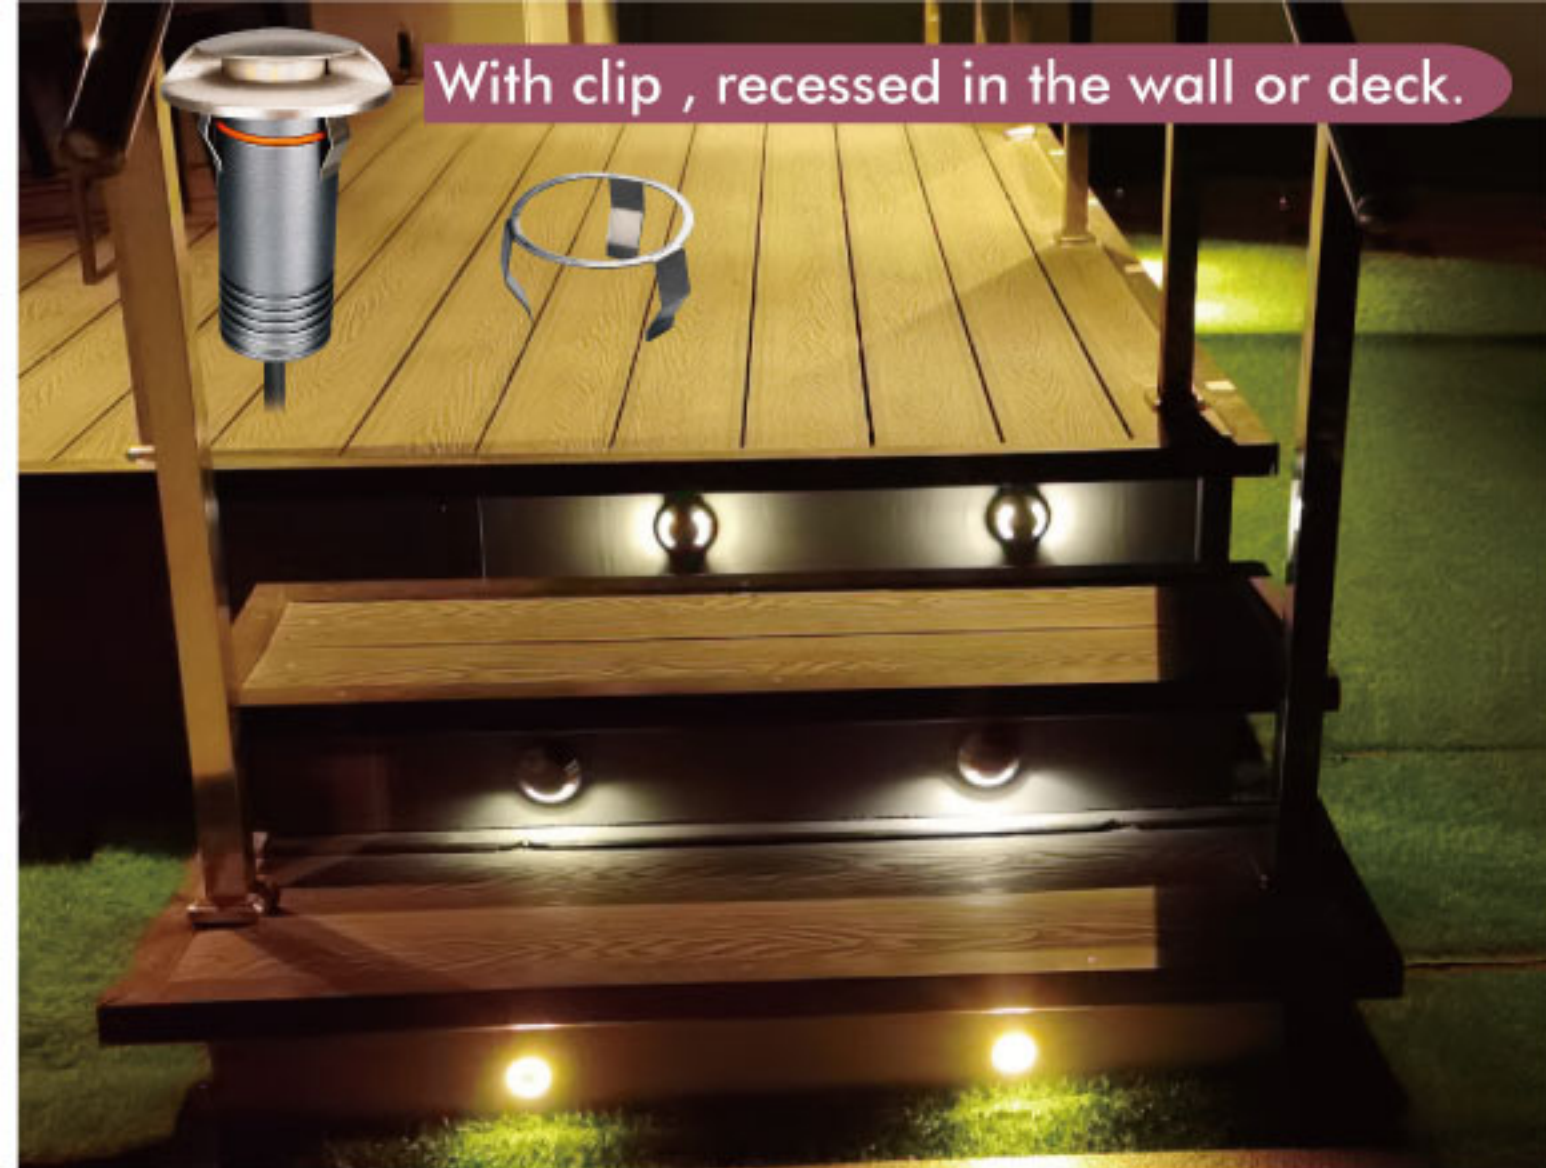

PLAYLITE® Crema C/CH-180D




CE RoHS COMPLIANT IP67 IK10

3 Years Warranty


Parameter

General Data	
Item No.	DC24V: UL-1006-0300C-180D / AC100-245V: UL-1006-0300CH-180D
Power	3 watts +10%
LED type	10PCS LUMILEDS 2835 SMD LED
Luminous flux	75 lm+10% with cover (200lm+10% tested without cover)
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	180°
Dimension	DC24V: Ø60 x 53 (mm) Diameter x Height AC100-245V: Ø60 x 80 (mm) Diameter x Height
Cut out	Ø40mm
Net weight	0.55 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V for C version, AC100-245V for CH version
Insulation class	Class III
Cable	1PC 1M H05RN-F 2 or 3*1mm ² rubber cable
Driver	constant current driver DC24V input or AC100-245V
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK10
Housing	Aluminium
Protection finishing	Passivated in dark grey
Trim	SS 316
Loading capacity	300 kgs
Cable Gland	PG7
Gasket	Silicone gasket
Accessories	
Mounting Sleeve	Aluminium tube for ground recessed mounting
Clip	Optional clip for wall or deck recessed mounting
Packaging	
Inner box size	145*115*75 mm
Carton size	46*37*17.5 cm (18PCS/CTN)

Dimension

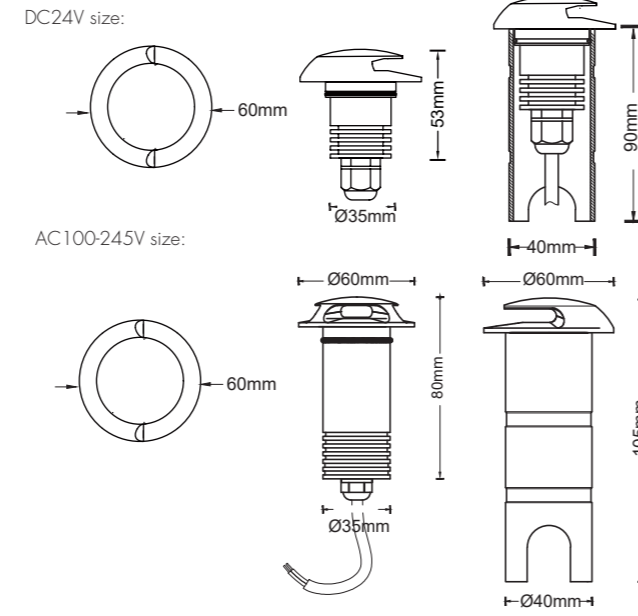

Light Distribution Curve (3000K, 180D)

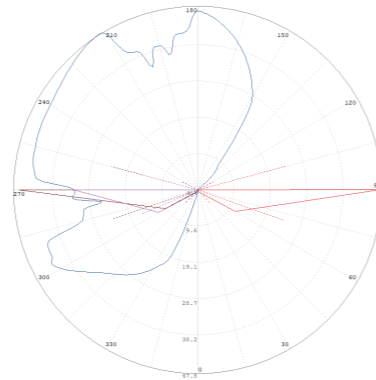

Illumination Picture (180D)



PLAYLITE® Crema C/CH-1WAY




CE RoHS COMPLIANT IP67 IK10

3 Years Warranty


Parameter

General Data	
Item No.	DC24V: UL-1006-0300C(1) / AC100-245V: UL-1006-0300CH(1)
Power	3 watts +10%
LED type	10PCS LUMILEDS 2835 SMD LED
Luminous flux	50 lm+10% with cover (200lm+10% tested without cover)
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	1 way
Dimension	DC24V: Ø60 x 53 (mm) Diameter x Height AC100-245V: Ø60 x 80 (mm) Diameter x Height
Cut out	Ø40mm
Net weight	0.55 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V for C version, AC100-245V for CH version
Insulation class	Class III
Cable	1PC 1M H05RN-F 2 or 3*1mm ² rubber cable
Driver	constant current driver DC24V input or AC100-245V
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK10
Housing	Aluminium
Protection finishing	Passivated in dark grey
Trim	SS 316
Loading capacity	300 kgs
Cable Gland	PG7
Gasket	Silicone gasket
Accessories	
Mounting Sleeve	Aluminium tube for ground recessed mounting
Clip	Optional clip for wall or deck recessed mounting
Packaging	
Inner box size	145*115*75 mm
Carton size	46*37*17.5 cm (18 PCS/CTN)


Dimension

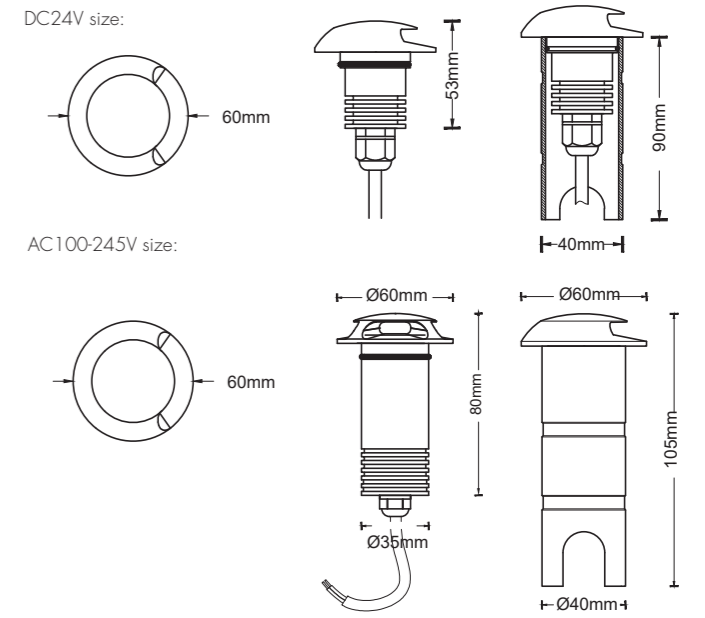

Light Distribution Curve (3000K, 1 WAY)

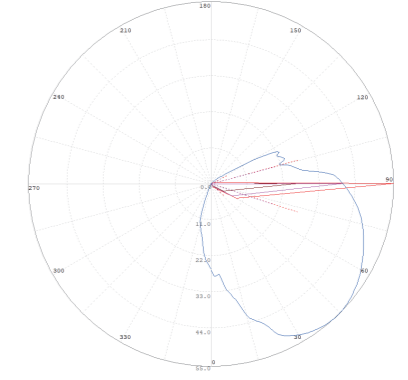

Illumination Picture (1 WAY)

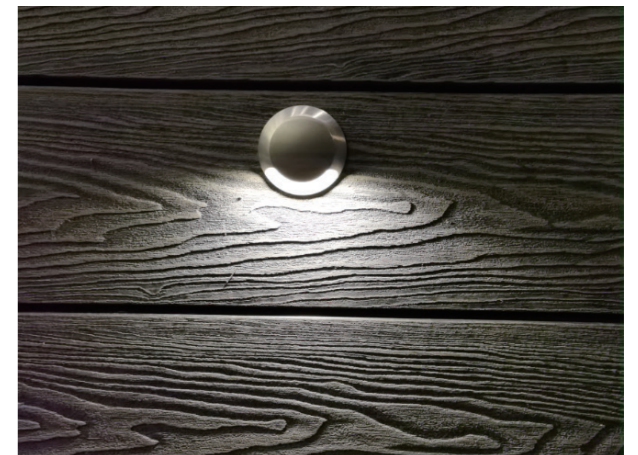



PLAYLITE® Crema C/CH-2WAY




CE RoHS COMPLIANT IP67 IK10
3 Years Warranty


Parameter

General Data	
Item No.	DC24V: UL-1006-0300-C(2) / AC100-245V: UL-1006-0300-CH(2)
Power	3 watts +10%
LED type	10PCS LUMILEDS 2835 SMD LED
Luminous flux	100 lm+10% with cover (200lm+10% tested without cover)
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	2 way
Dimension	DC24V: Ø60 x 53 (mm) Diameter x Height AC100-245V: Ø60 x 80 (mm) Diameter x Height
Cut out	Ø40mm
Net weight	0.51 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V for C version, AC100-245V for CH version
Insulation class	Class III
Cable	1PC 1M H05RN-F 2 or 3*1mm ² rubber cable
Driver	constant current driver DC24V input or AC100-245V
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK10
Housing	Aluminium
Protection finishing	Passivated in dark grey
Trim	SS 316
Loading capacity	300 kgs
Cable Gland	PG7
Gasket	Silicone gasket
Accessories	
Mounting Sleeve	Aluminium tube for ground recessed mounting
Clip	Optional clip for wall or deck recessed mounting
Packaging	
Inner box size	145*115*75 mm
Carton size	46*37*17.5 cm (18PCS/CTN)


Dimension

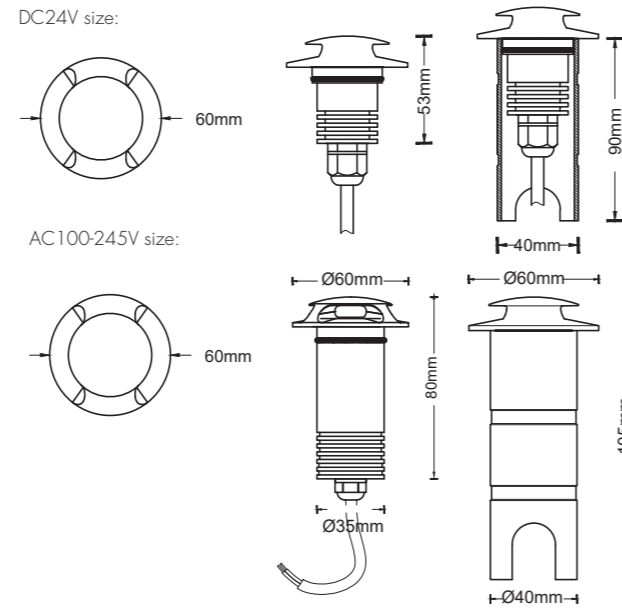

Light Distribution Curve (3000K, 2 WAY)

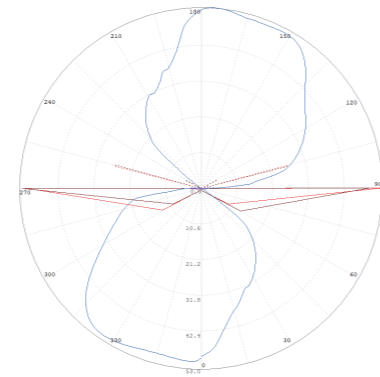

Illumination Picture (2 WAY)

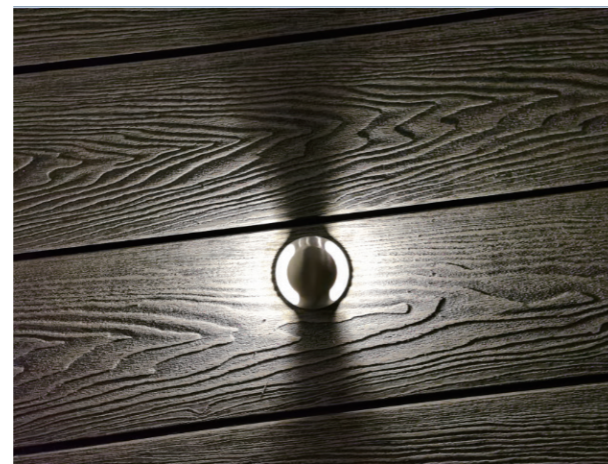

PLAYLITE® Crema C/CH-3AWAY




CE RoHS COMPLIANT IP67 IK10
3 Years Warranty


Parameter

General Data	
Item No.	DC24V: UL-1006-0300-C(3A) / AC100-245V: UL-1006-0300-CH(3A)
Power	3 watts +10%
LED type	10PCS LUMILEDS 2835 SMD LED
Luminous flux	110 lm+10% with cover (200lm+10% tested without cover)
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	3 way
Dimension	DC24V: Ø60 x 53 (mm) Diameter x Height AC100-245V: Ø60 x 80 (mm) Diameter x Height
Cut out	Ø40mm
Net weight	0.51 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V for C version, AC100-245V for CH version
Insulation class	Class III
Cable	1PC 1M H05RN-F 2 or 3*1mm ² rubber cable
Driver	constant current driver DC24V input or AC100-245V
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK10
Housing	Aluminium
Protection finishing	Passivated in dark grey
Trim	SS 316
Loading capacity	300 kgs
Cable Gland	PG7
Gasket	Silicone gasket
Accessories	
Mounting Sleeve	Aluminium tube for ground recessed mounting
Clip	Optional clip for wall or deck recessed mounting
Packaging	
Inner box size	145*115*75 mm
Carton size	46*37*17.5 cm (18 PCS/CTN)

Dimension

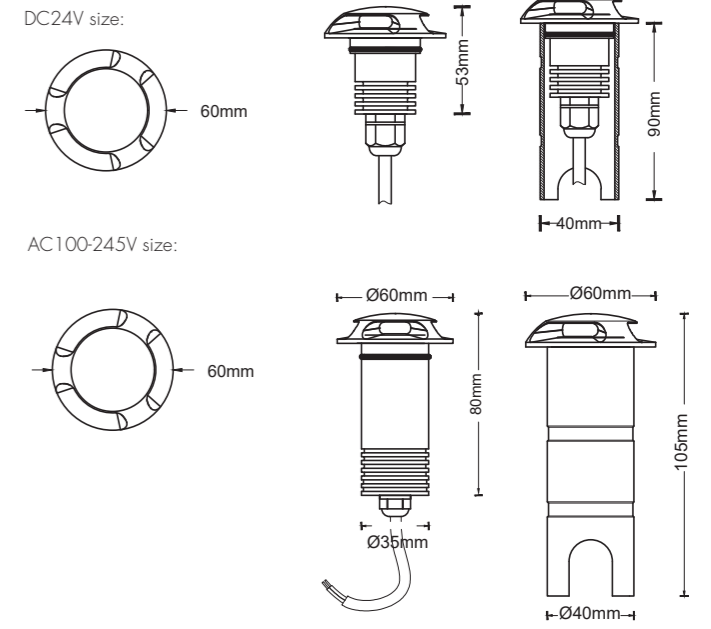

Light Distribution Curve (3000K, 3 WAY)

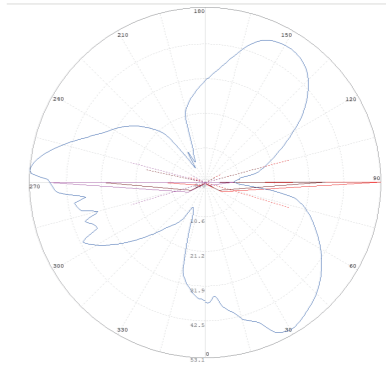

Illumination Picture (3 WAY)



PLAYLITE® Crema C/CH-3BWAY




CE RoHS COMPLIANT IP67 IK10
3 Years Warranty


Parameter

General Data	
Item No.	DC24V: UL-1006-0300-C(3B)/ AC100-245V: UL-1006-0300-CH(3B)
Power	3 watts +10%
LED type	10PCS LUMILEDS 2835 SMD LED
Luminous flux	100 lm+10% with cover (200lm+10% tested without cover)
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	3 way
Dimension	DC24V: $\Phi 60 \times 53$ (mm) Diameter x Height AC100-245V: $\Phi 60 \times 80$ (mm) Diameter x Height
Cut out	$\Phi 40$ mm
Net weight	0.53 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V for C version, AC100-245V for CH version
Insulation class	Class III
Cable	1PC 1M H05RN-F 2 or 3*1mm ² rubber cable
Driver	constant current driver DC24V input or AC100-245V
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK10
Housing	Aluminium
Protection finishing	Passivated in dark grey
Trim	SS 316
Loading capacity	300 kgs
Cable Gland	PG7
Gasket	Silicone gasket
Accessories	
Mounting Sleeve	Aluminium tube for ground recessed mounting
Clip	Optional clip for wall or deck recessed mounting
Packaging	
Inner box size	145*115*75 mm
Carton size	46*37*17.5 cm (18PCS/CTN)


Dimension

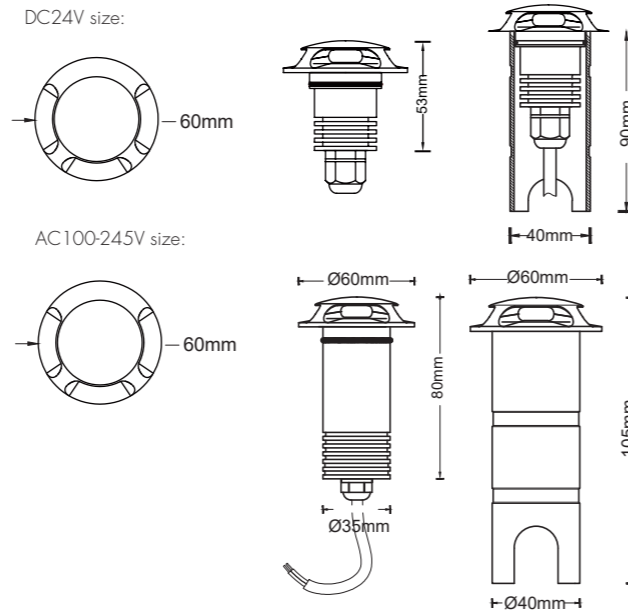


Light Distribution Curve (3000K, 3 WAY)

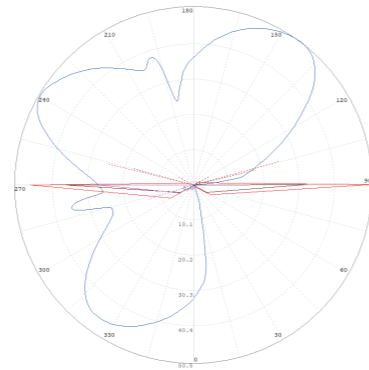

Illumination Picture (3 WAY)

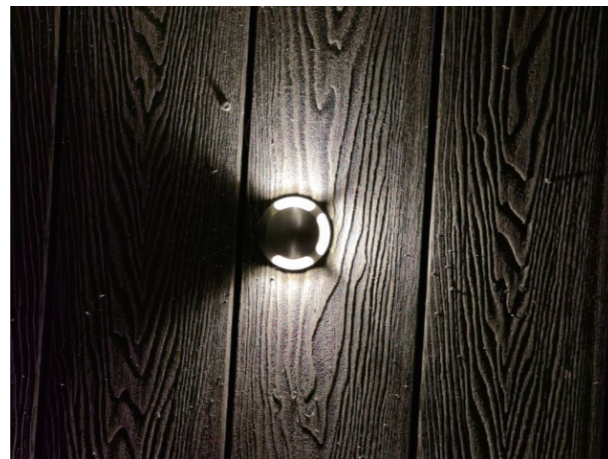

PLAYLITE® Crema C/CH-4WAY

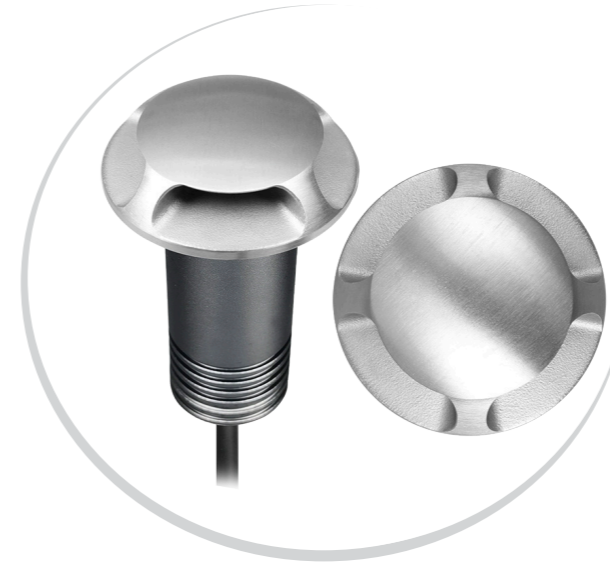


CE RoHS COMPLIANT IP67 IK10
3 Years Warranty


Parameter

General Data	
Item No.	DC24V: UL-1006-0300-C(4)/ AC100-245V: UL-1006-0300-CH(4)
Power	3 watts +10%
LED type	10PCS LUMILEDS 2835 SMD LED
Luminous flux	110 lm+10% with cover (200lm+10% tested without cover)
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	4 way
Dimension	DC24V: $\Phi 60 \times 53$ (mm) Diameter x Height AC100-245V: $\Phi 60 \times 80$ (mm) Diameter x Height
Cut out	$\Phi 40$ mm
Net weight	0.50 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V for C version, AC100-245V for CH version
Insulation class	Class III
Cable	1PC 1M H05RN-F 2 or 3*1mm ² rubber cable
Driver	constant current driver DC24V input or AC100-245V
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK10
Housing	Aluminium
Protection finishing	Passivated in dark grey
Trim	SS 316
Loading capacity	300 kgs
Cable Gland	PG7
Gasket	Silicone gasket
Accessories	
Mounting Sleeve	Aluminium tube for ground recessed mounting
Clip	Optional clip for wall or deck recessed mounting
Packaging	
Inner box size	145*115*75 mm
Carton size	46*37*17.5 cm (18 PCS/CTN)

Dimension

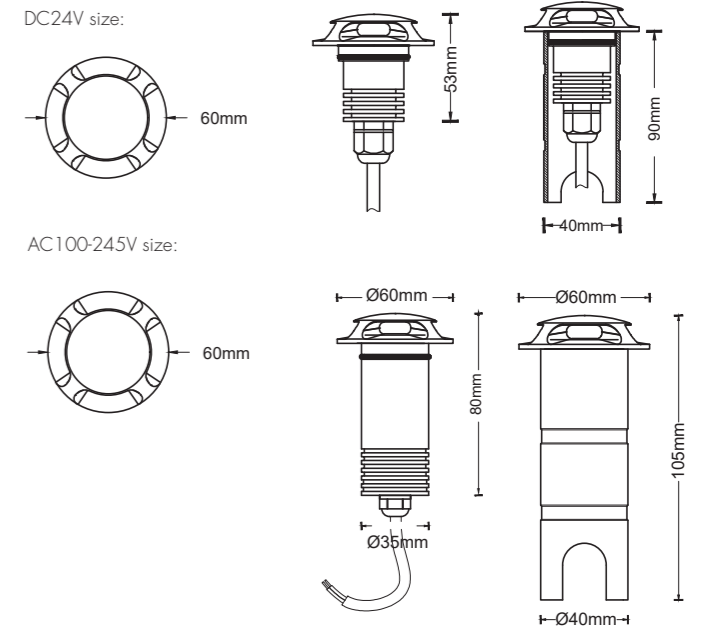

Light Distribution Curve (3000K,4 WAY)

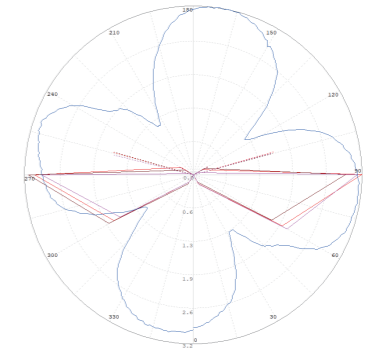

Illumination Picture (4 WAY)



