

LMK7-BH 三相电流互感器


LMK7-BH three-phase current transformer

概述 Overview

三相电流互感器，专为采集电流信号而设计。严格按照标准 CM1 塑壳断路器穿排尺寸设计。本系列产品测量范围宽，额定一次电流范围：0~1000A 额定二次电流范围：20MA ~ 5A，优异先进的制作工艺。保证了其准确度等级，可靠性等技术要求，本系列产品满足 GB28184-2011 和 GB14287.2-2014 的要求。

Three-phase current transformer, specially designed for collecting current signals. It is strictly designed in accordance with the standard CM1 molded case circuit breaker bushing dimensions. This series of products have a wide measurement range, with a rated primary current range of 0 to 1000A and a rated secondary current range of 20MA to 5A. They feature an excellent and advanced manufacturing process. This series of products ensures the technical requirements such as accuracy grade and reliability, and meets the requirements of GB28184-2011 and GB14287.2-2014.

型号及其含义 Model and its meaning

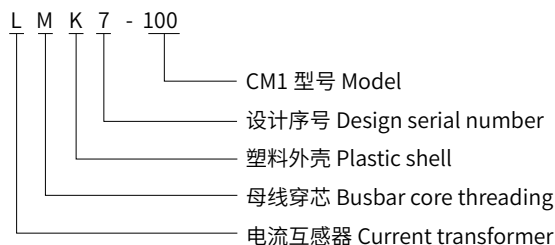

应用范围 Scope of application

电气火灾监控、电流电压传感器设备、消防设备电源模块、防火漏电系统、小电流接地系统、电磁继电器保护、微机保护等。

Electrical fire monitoring, current and voltage sensor equipment, power modules for fire protection equipment, fire leakage protection systems, small current grounding systems, electromagnetic relay protection, microcomputer protection, etc.

应用范围 Scope of application


- 铜排线缆都能穿过，
- 穿芯结构、阻燃性环氧树脂浇注、稳定性好
- 采用高导磁镍钢或纳米晶，线性度好、灵敏度高
- 优异的平衡特性、并具有极强的抗电磁场干扰能
- Copper busbar cables can all pass through.
- Through-core structure, flame-retardant epoxy resin casting, and good stability
- It adopts high-permeability nickel steel or nanocrystals, featuring good linearity and high sensitivity
- It has excellent balance characteristics and extremely strong anti-electromagnetic field interference ability






LMK7-100 型 Type

额定输入 (A) Rated input	额定输出 (mA) Rated output	精度等级 Accuracy level
0~200A	0-5A	1-10

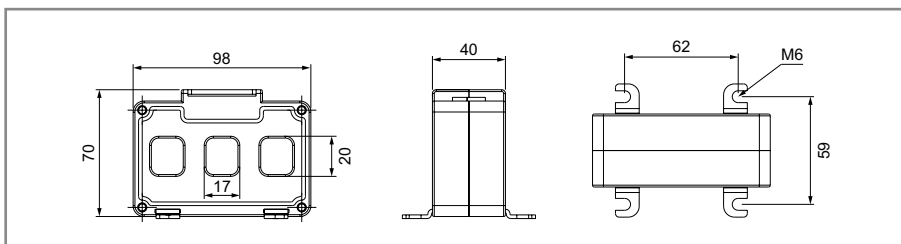



LMK7-250 型 Type

额定输入 (A) Rated input	额定输出 (mA) Rated output	精度等级 Accuracy level
0~400A	0-5A	1-10

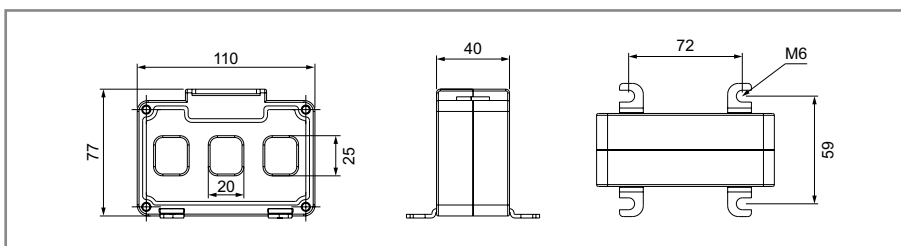


LMK7-400 型 Type

额定输入 (A) Rated input	额定输出 (mA) Rated output	精度等级 Accuracy level
0~600A	0-5A	1-10

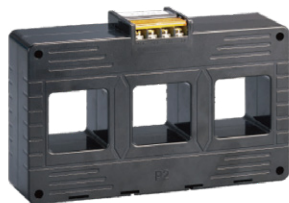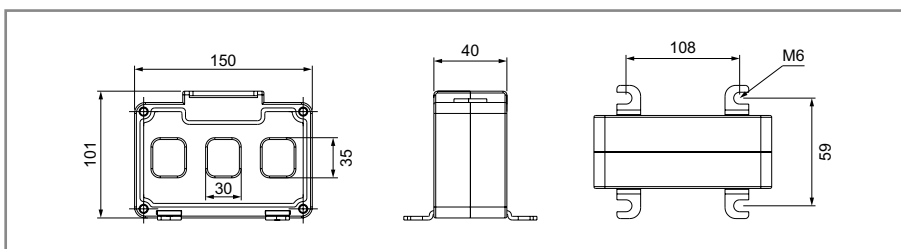

LMK7-600 型 Type


额定输入 (A) Rated input	额定输出 (mA) Rated output	精度等级 Accuracy level
0~800A	0-5A	1-10

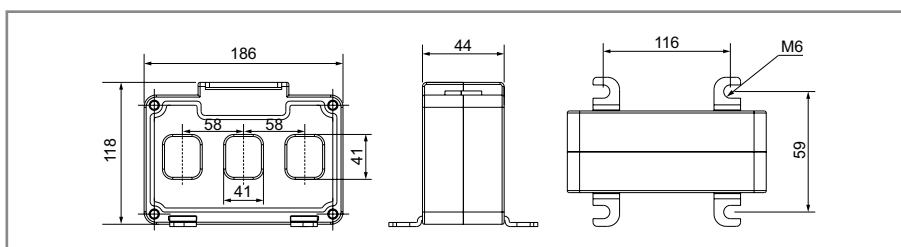



LMK7-800 型 Type

额定输入 (A) Rated input	额定输出 (mA) Rated output	精度等级 Accuracy level
0~1000A	0-5A	1-10

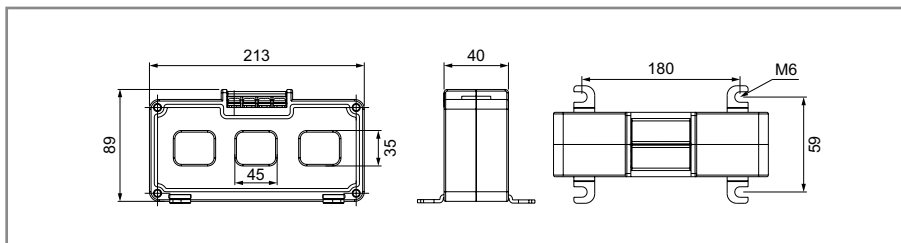

用户在订货时，需提供以下信息：

- 1、产品型号及窗口宽度；
- 2、额定电流比；
- 3、额定输出及相应准确级；

例如：订货 LMZJ1-0.66 型，窗口宽度为 30mm，额定电流比 200/5A、额定输出 5VA、准确级 0.5 级的互感器。

订货代号为 LMZJ1-0.66 Ø 30 200/5A 1 匝 5VA 0.5。

- 4、如有特殊要求时，可与厂家协商定制。