
www.di



2.5M-3.2M ECO SOLVENT PRINTER





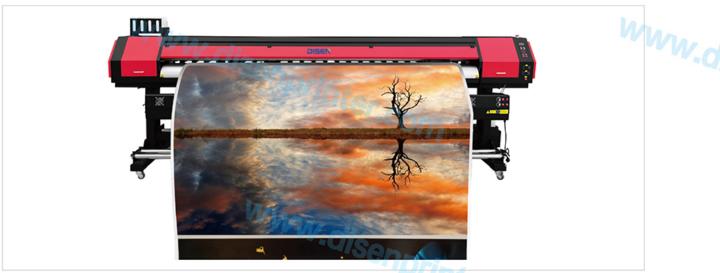



Machinedetails











Automatic lifting ink stack

Control System

Segmented drying system

High-precision guide rail

Double servo motor

Print effect display







Advertising light box



Indoor advertising



KT version



Yilapao/exhibition stand



Photo paper/hanging picture



wallpaper



Car sticker

www.di



Parameters and Specifications

		1			
MODEL		2.5M PRINTER	A 3.2M PRINTER	B 3.2M PRINTER	C 3.2M PRINTER
Printing tech	nology				
Sprinkler Typ	e V	DX5/xp600/3200	3200	xp600/TX800/DX5	i3200E1/A1
Number of nozzles		2 piece			
Model description		2.5-3.2M wide eco solvent printer/thermal transfer printer			
Print orientation		Bidirectional printing / Unidirectional printing			
Nozzle height		2mm-3mm			
Nozzle clean	ing	Fully automatic cleaning	g, with anti-blocking flash s	spray function and automa	tic moisturizing function
Printing spee	ed				
Production n	node	4pass: 30m²/h	4pass: 45m²/h	4pass: 26m²/h	4pass: 42m²/h
Quality mode	e	6pass: 18m²/h	6pass: 30m²/h	6pass: 16m²/h	6pass: 30m²/h
Precision mo	de	8pass: 12m²/h	8pass: 18m²/h	8pass: 10m²/h	8pass: 20m²/h
Ink system			96/1	Dring	
Туре		Eco-solvent ink/thermal transfer ink/water-based ink			
Color		4 (C/M/Y/K)			
Ink supply method		Negative pressure continuous ink supply			
Capacity			2000ml large capacity co	ontinuous supply system	
Configure			la-		
Delivery system		Standard			
Heating system		Front and rear platform heating			
Drying system		Infrared drying system + cold air drying			
Medium	ercc				"TEL.CO
Print width		2500mm	3200mm	3200mm	3200mm
Print media Maximum roll weight		Outdoor PP/lamp cloth/photo paper/oil painting cloth/reflective film/car sticker/PP adhesive/thermal transfer paper/light box cloth and other rolls			
		200kg	200kg	150kg	150kg
Operation		Mas			
Operating la	nguage	Chinese / English			
Operating system		WindowsXP/Win7/win10			
Operating er	erating environment Best environment: 18-25°C, humidity 35%-65%RH				341/0
Print interface		USB			
Printing soft	ware	Maintop/photoprint			
Other param	eters				
Power suppl		AC-220V-110V,50Hz/60Hz			
Power Box size		Standby power 32W, maximum power 5000W Standby power 32W, maximum power 4700W			
			4.42*0.74*0.76m(L*W*H)		
				,	,

ter.com