

Double head


700MM DTF PRINTER

Convenient, high efficiency and low cost: One-stop hollow printing, no cutting plotter, laminating machine, hollow machine, no waste discharge, time and labor saving.



White ink circulation system

Timed circulation of white ink, stirring system, can effectively prevent the blockage of the nozzle caused by the precipitation of white ink, and prolong the life of the nozzle.

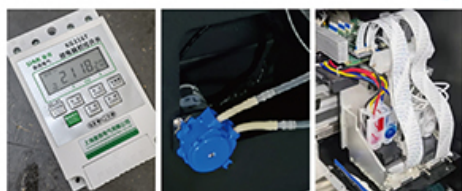


FOUR HEAD 700MM DTF PRINTER

Good effect: the pattern is soft to the touch, washable and stretchable, and the wet and dry fastness reaches level 4.



Double sprinkler

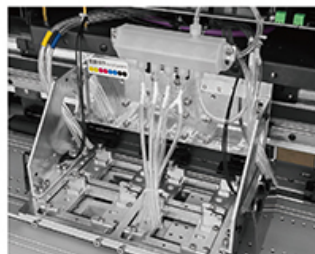

Ink output



Automatic lifting ink stack



Microcomputer time control switch

PARAMETERS AND SPECIFICATIONS

printing technology		
Sprinkler Type	xp600/TX800	i3200
Number of nozzles	2 piece	2 piece
Model description	70CM wide heat transfer printer	70CM wide heat transfer printer
print orientation	Bidirectional printing / Unidirectional printing	
Nozzle height	2mm-3mm	
Nozzle cleaning	Fully automatic cleaning, with anti-blocking flash spray function and automatic moisturizing function	
printing speed		
production mode	4pass: 8m²/h	4pass: 12m²/h
quality mode	6pass: 6m²/h	6pass: 9m²/h
Precision mode	8pass: 4m²/h	8pass: 6m²/h
ink system		
type	dth ink	
color	5 (C/M/Y/K/W)	
Ink supply method	Positive pressure continuous ink supply	
capacity	1500ml	
configure		
Delivery system	Standard	
Heating system	Front and rear platform heating	
drying system	Independently controlled cooling fan	
medium		
print width	700mm	700mm
print media	pet printing film	
Maximum roll weight	40kg	40kg
Operation		
operating language	Chinese / English	
operating system	WindowsXP/Win7/win10	
Operating environment	Best environment: 18-25°C, humidity 35%-65%RH	
print interface	USB	
printing software	Maintop/photoprint	
Other parameters		
power supply	AC-220V-110V,50Hz/60Hz	
power	Standby power 32W, maximum power 300W	
box size	1.95*0.74*0.71m (L*W*H)	1.3*1*1.2m (L*W*H)
machine weight	180kg	150kg