



MODEL MM0830P47C
800~3000MHz
50 WATTS
WIDE BAND POWER RF AMPLIFIER

Advantages:

- Operating Frequency :800~3000MHz
- Power Gain:47dB Typical
- Psat:50W Typical
- Supply Voltage:+28V
- 50 Ohms Input and Output Matched

ELECTRICAL SPECIFICATIONS @ +28VDC, 25°C, 50Ω

Parameter	Symbol	Min	Typ	Max	Units
Operating Frequency	BW	800		3000	MHz
RF Output Power @Pin=0dBm	P _{SAT}		50		Watt
Power Gain@P _{SAT}	G _p		47		dB
Input Power for Rated PSAT	PIN		0		dBm
Power Gain Flatness	Δ G _p		±1.5		dB
Input Return Loss	S ₁₁			-10	dB
Noise Figure @ Max Gain	NF		11		dB
Third Order Intercept Point2-Tone @ 41dBm/Tone, 1MHz Spacing	IP3		+50		dBm
Harmonics @20W	H		-15		dBc
Spurious Signals	Spur		-60		dBc
Switch On/Off@10-90% Time, 1KHz	T _{ON/OFF}		2	5	μS
In/Output Impedance	Impedance		50		Ω
Operating Voltage	V _{DC}	24	28	32	Volt
Current Consumption @ Shutdown	I _{SD}			0.3	Amp
DC Current @50W	I _{DD}		9		Amp

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Notes
Dimensions	162.56x86.36x25 [6.4 x 3.4 x 0.98]	mm [inch]	Maximum
Weight	1.0 [2.2]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	SMA, Female		
DC Interface Connector	D-Sub 9-Pin, Male		
Cooling	External Heat sink Required (Not Supplied)		

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-40		60	°C	
Non-operating Temperature	-45		85	°C	Storage
Relative Humidity (non-condensing)			95	%	

ABSOLUTE MAXIMUM RATING

Input RF drive level without damage	+10 dBm (Max)
Load VSWR @ P _{OUT} =40W	∞ @ all load phase & amplitude for duration of 1 minute; 3:1 @ all load phase & amplitude continuous.
Over Temperature	85°C @ heatsink [restored @ 60°C]




POWER INTERFACE CONNECTOR

Male D-Sub is on the housing

Pin #	Description	Specifications
1	Reserved	No electrical connection
2	CURRENT SENSE	Analog voltage relative to IDD @ 100mV per Ampere
3	TEMP SENSE	Analog voltage relative to Module's Temperature @ 0.5V+10 mV/°C
4	Reserved	No electrical connection
5	SHUTDOWN	Amplifier Disable: TTL Logic High (3.3V~5V) (Internally Pulled-Low)
6	VDD	28VDC
7	VDD	28VDC
8	GND	Ground
9	GND	Ground

TYPICAL PERFORMANCE PLOTS (FOR REFERENCE ONLY)

Output Power (Normal temp. +25±3°C)

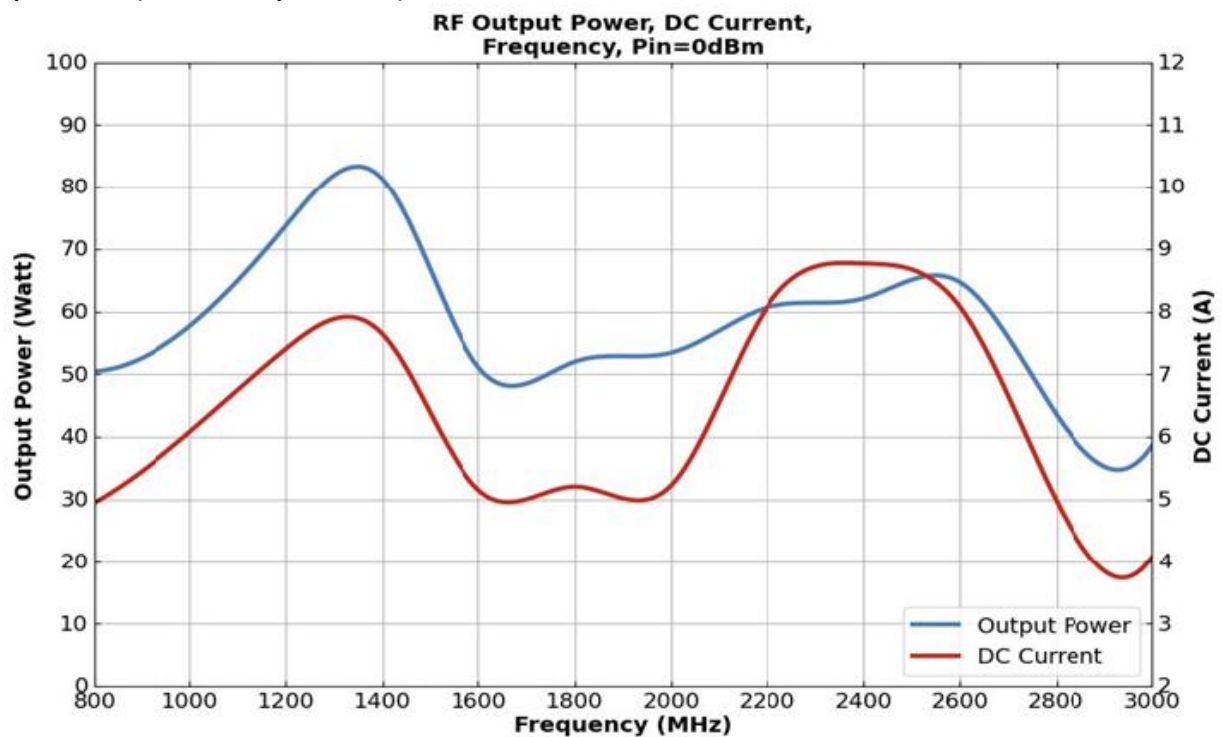

Note: Adequate heatsink required.