



MODEL MM2325P47A
2.3~2.5GHz
50 WATTS
NARROW BAND POWER RF AMPLIFIER

Advantages:

- Operating Frequency: 2.3~2.5GHz
- Power Gain: 49dB Typical
- Psat: 50W Typ
- Supply Voltage: +28V
- 50 Ohms Input and Output Matched

ELECTRICAL SPECIFICATIONS @ +28VDC, 25°C, 50Ω

Parameter	Symbol	Min	Typ	Max	Units
Operating Frequency	BW	2.3		2.5	GHz
RF Output Power @Pin=-2dBm	P _{SAT}	50			Watt
Power Gain	G _p		49		dB
Power Gain Flatness	Δ G _p		±1.5		dB
Input Return Loss	S ₁₁		-14	-10	dB
Output Return Loss	S ₂₂		-14	-10	dB
Harmonics @30W	H		-40		dBc
Spurious Signals	Spur		-55		dBc
Switching On/Off@10-90% Time,1kHz	T _{ON/OFF}		2		μS
In/Output Impedance	Impedance		50		Ω
Operating Voltage	V _{DC}	24	28	32	Volt
DC Current @50W	I _{DD}		7		Amp

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Notes
Dimensions	150x90x25 [5.91x3.55x0.98]	mm [inch]	Maximum
Weight	1.5 [3.3]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	SMA, Female		
DC Interface Connector	D-Sub 9-Pin, Male		
Cooling	External Heatsink Required (Not Supplied)		

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-40		60	°C	
Non-operating Temperature	-45		85	°C	Storage
Relative Humidity (non-condensing)			95	%	

ABSOLUTE MAXIMUM RATING

Input RF drive level without damage	+5 dBm (Max)
Load VSWR @ P _{OUT} =20W	∞ @ all load phase & amplitude for duration of 1 minute; 3:1 @ all load phase & amplitude continuous.
Over Temperature	85°C @heatsink [restored @ 60°C]




POWER INTERFACE CONNECTOR

Male D-Sub is on the housing

Pin #	Description	Specifications
1	VDD	28V _{DC}
2	VDD	28V _{DC}
3	GND	Ground
4	GND	Ground
5	SHUTDOWN	Amplifier Disable: TTL Logic High (3.3V~5V) (Internally Pulled-Low)
6	CURRENT SENSE	Analog voltage relative to I _{DD} @ 100mV per Ampere
7	TEMP SENSE	Analog voltage relative to Module's Temperature @ 0.5V+10 mV/°C
8	NC	No electrical connection
9	NC	No electrical connection

TYPICAL PERFORMANCE PLOTS (FOR REFERENCE ONLY)

Output Power (Normal temp. +25±3°C)

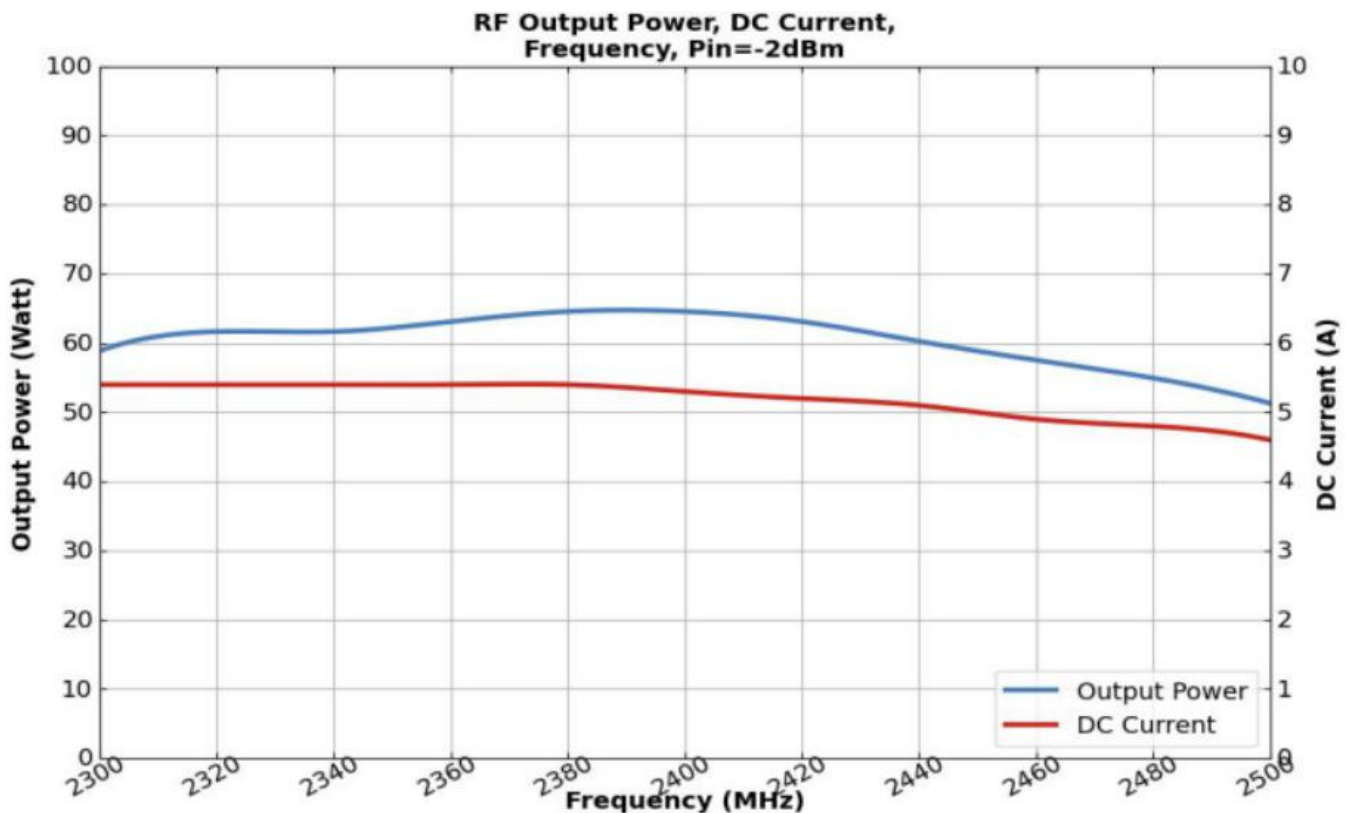

Note: Adequate heatsink required.