

JDZX9-3、6、10(D) 型电压互感器

JDZX9-3, 6, 10(D) type voltage transformers

概述 Summarize


JDZX9-3、6、10(D) 型电压互感器适用于额定频率为 50Hz 或 60Hz、额定电压为 3~10 kV 的交流电力系统中，作电能计量、电压监测和继电保护用。

产品执行标准为 GB20840.1-2010、GB20840.2-2013。

The JDZX9-3, 6, 10(D) type voltage transformer is suitable for AC power systems with a rated frequency of 50Hz or 60Hz and a rated voltage of 3 to 10 kV, and is used for electric energy metering, voltage monitoring and relay protection. The product execution standards are GB20840.1-2010 and GB20840.2-2013.



型号及其含义 Model and its meaning

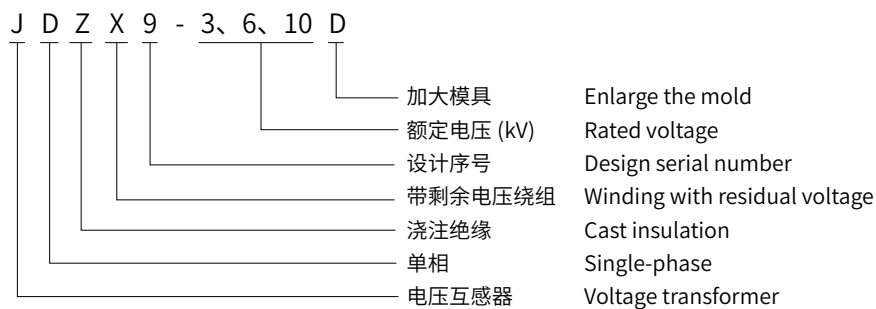

技术参数 Technical parameters

产品型号 Product model	额定电压比 (kV) Rated voltage ratio	准确级或准确级组合 Accuracy level or a combination of accuracy levels	额定输出 Rated output(VA)	极限输出 Extreme output (VA)	额定绝缘水平 Rated insulation level (kV)
JDZX9-3	$3/\sqrt{3}/0.1/\sqrt{3}/0.1/3$	0.2/6P(3P)	15/100	400	3.6/25/40
		0.5/6P(3P)	30/100		
JDZX9-6	$6/\sqrt{3}/0.1/\sqrt{3}/0.1/3$	0.2/6P(3P)	15/100	400	7.2/32//60
		0.5/6P(3P)	30/100		
JDZX9-10	$10/\sqrt{3}/0.1/\sqrt{3}/0.1/3$	0.2/6P(3P)	25/100	400	12/42/75
		0.5/6P(3P)	50/100		

正常使用条件 Normal service condition


- 安装场所：户内。
- 环境温度：最高气温 40℃；最低气温 -5℃；日平均气温不超过 30℃。
- 大气条件：大气中无严重污秽。
- Installation site: Indoor.
- Ambient temperature: Maximum air temperature 40℃ ; The minimum temperature is -5℃ . The daily average temperature does not exceed 30℃ .
- Atmospheric conditions: There is no severe pollution in the atmosphere.

结构与特点 Structure and characteristics

本系列电压互感器为支柱式结构，采用环氧树脂全封闭环氧浇注，耐污染及潮湿，也适用于热带地区使用，互感器不需要特别维护，只需定期地清除表面污物。互感器二次出线端子处安装接线端子盒，端子盒正面和侧面各有一个孔与出线端配合供引出接线用，安全可靠。产品底板上有接地螺栓及供安装用的四个安装孔。

This series of voltage transformers adopt a pillar structure and are fully enclosed with epoxy resin by epoxy casting. They are resistant to pollution and moisture and are also suitable for use in tropical regions. The transformers do not require special maintenance and only need to have their surface dirt cleaned regularly. A terminal box is installed at the secondary output terminal of the transformer. There is a hole on the front and a hole on the side of the terminal box to cooperate with the output terminal for lead-out wiring, which is safe and reliable. The base plate of the product is equipped with grounding bolts and four installation holes for installation.


外形图及安装尺寸 Outline and mounting dimensions

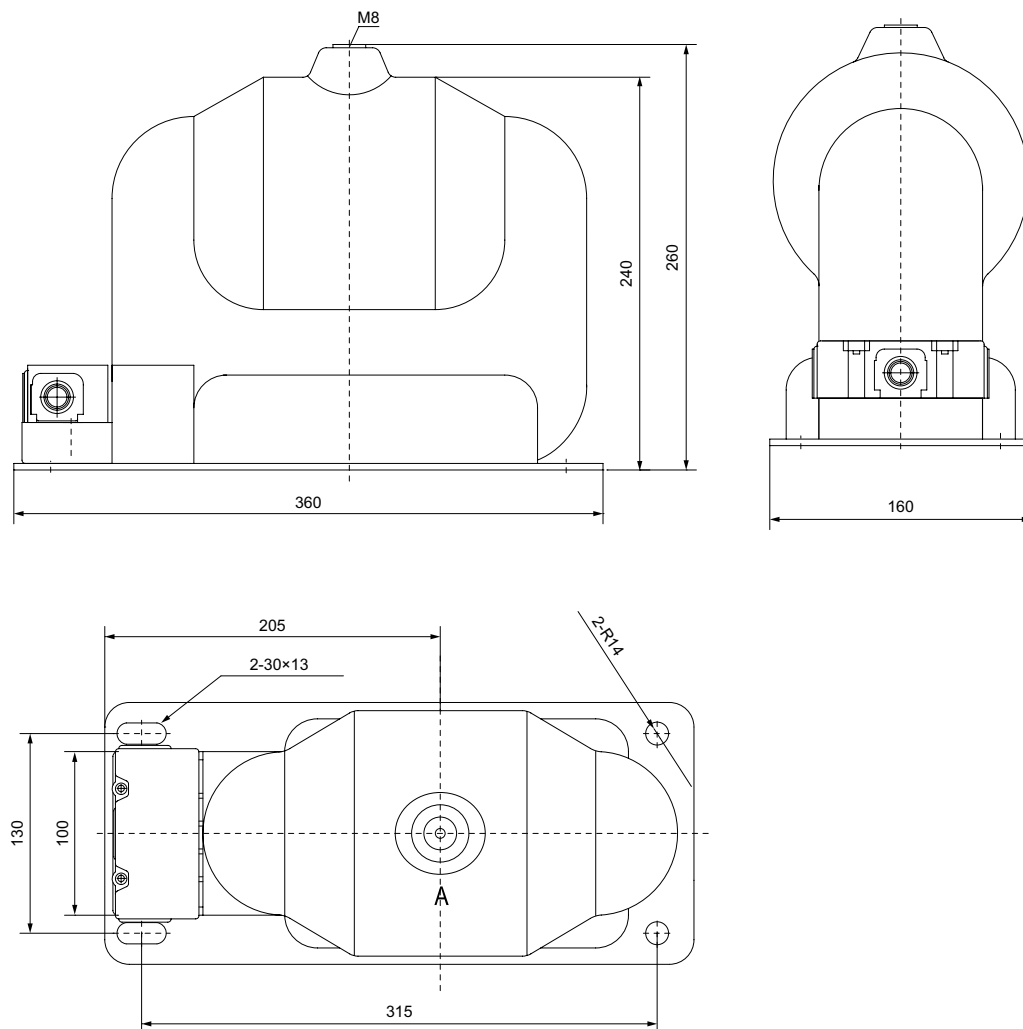

JDZX9-3、6、10 电压互感器外形图及安装尺寸

JDZX9-3、6、10 Voltage transformer outline drawing and installation dimensions

外形图及安装尺寸 Outline and mounting dimensions

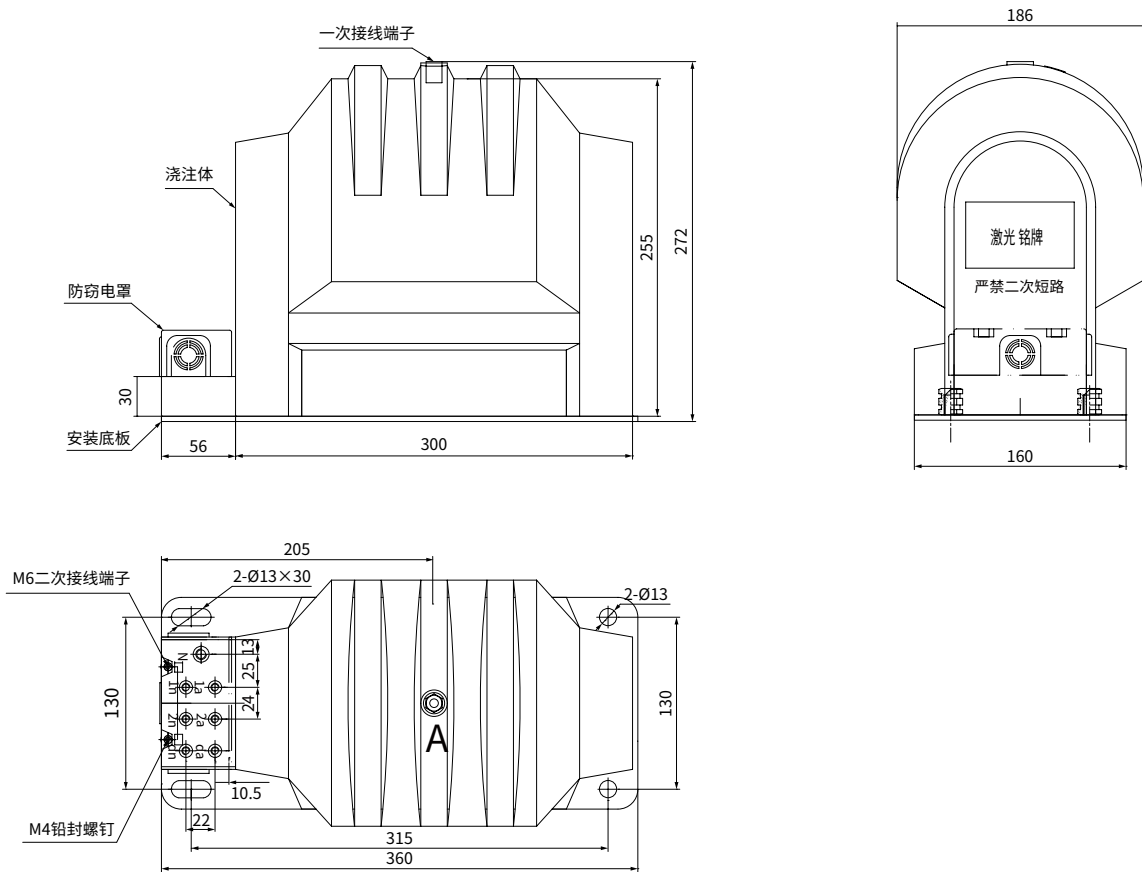

JDZX9-3、6、10D 电压互感器外形图及安装尺寸
JDZX9-3、6、10D Voltage transformer outline drawing and installation dimensions