

JSZY19-10R型电压互感器

JSZY19-10R voltage transformer

概述 Summarize

JSZY19-10R 型电压互感器适用于额定频率为 50Hz 或 60Hz，额定电压为 6-10kV 的交流电力系统中，作电能计量、电压测量和继电保护用。


产品执行标准为 GB20840.1-2010、GB20840.3-2013。

JSZY19-10R voltage transformer is suitable for AC power system with rated frequency of 50Hz or 60Hz and rated voltage of 6-10kV, which is used for electric energy measurement, voltage measurement and relay protection.

The product implementation standards are GB20840.1-2010 and GB20840.3-2013.



型号及其含义 Model and its meaning

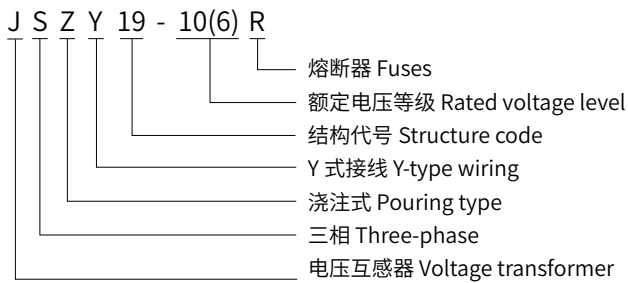

技术参数 Technical parameter

- 功率因数： $\cos\phi=0.8^*$ (滞后)
- 额定二次电压：100/ $\sqrt{3}$ V 220/ $\sqrt{3}$ V 100/3V(100V)
- 额定频率：50Hz 或 60Hz
- 防污等级：II 级
- 环境温度：最低温度 -5℃，最高温度 +40℃，日均温度不超过 30℃
- 海拔高度：≤ 1000 米
- 产品标准：GB/T20840.3
- Power factor : $\cos\phi = 0.8^*$ (lag)
- Rated secondary voltage : 100 / $\sqrt{3}$ V 220 / $\sqrt{3}$ V 100 / 3V (100V)
- Rated frequency : 50Hz or 60Hz
- Anti-fouling grade : Grade II
- Ambient temperature : minimum temperature -5 ° C, maximum temperature + 40 ° C, daily average temperature does not exceed 30 ° C.
- Altitude : ≤ 1000m
- Product standard : GB / T20840.3

技术参数 Technical parameter

型号 Product model	额定电压比 (kV) Rated voltage ratio	准确级次 Accuracy level	准确级及额定输出 (VA) Accurate level and rated output				二次热极限输出 (VA) Secondary thermal limit output
			0.2	0.5	3	3(6)P	
JSZW16-6R	6/ $\sqrt{3}$ 0.1/ $\sqrt{3}$ 0.1/3	0.2/3(6)P	10	-	-	50	600
	6/ $\sqrt{3}$ 0.1/ $\sqrt{3}$ 0.1/3	0.5/3(6)P	-	20	-	50	
	6/ $\sqrt{3}$ 0.1/ $\sqrt{3}$ 0.1/ $\sqrt{3}$ 0.1/3	0.2/0.5/3(6)P	10	10	-	50	
	6/ $\sqrt{3}$ 0.1/ $\sqrt{3}$ 0.1/ $\sqrt{3}$ 0.1/3	0.5/3/3(6)P	-	30	500	50	
JSZW16-10R	10/ $\sqrt{3}$ 0.1/ $\sqrt{3}$ 0.1/3	0.2/3(6)P	10	-	-	50	900
	10/ $\sqrt{3}$ 0.1/ $\sqrt{3}$ 0.1/3	0.5/3(6)P	-	30	-	50	
	10/ $\sqrt{3}$ 0.1/ $\sqrt{3}$ 0.1/ $\sqrt{3}$ 0.1/3	0.2/0.5/3(6)P	10	15	-	50	
	10/ $\sqrt{3}$ 0.1/ $\sqrt{3}$ 0.1/ $\sqrt{3}$ 0.1/3	0.5/3/3(6)P	-	30	800	50	

外形图及安装尺寸 Outline and mounting dimensions

