

LMZJ1-0.5 实心型电流互感器

LMZJ1-0.5 solid current transformer

适用范围 Scope of application

LMZJ1-0.5 实心型电流互感器主要用于户内，供额定电压为 0.5kV 及以下，额定频率为 50Hz 的交流电路中作为电流、电能测量或继电保护用，产品采用浇注绝缘，采用安装底板固定安装。

符合标准：GB/T20840。

The LMZJ1-0.5 solid current transformer is mainly used indoors, for current and energy measurement or relay protection in AC circuits with a rated voltage of 0.5kV or less and a rated frequency of 50Hz. The product adopts cast insulation and is fixed and installed with an installation base plate.


Complies with the standard: GB/T20840.

正常工作条件及安装条件

Normal working conditions and installation conditions

- 安装场所：户内
- 环境温度：-5℃ ~ +40℃
- 环境湿度：相对湿度不大于 80%
- 海拔高度：不超过 1000m
- 大气条件：大气中无严重污秽
- Installation place: indoor
- Ambient temperature: -5℃ ~ +40℃
- Ambient humidity: The relative humidity is less than 80%
- Altitude: No more than 1000m
- Atmospheric conditions: no serious pollution in the atmosphere

型号及其含义 Model and its meaning

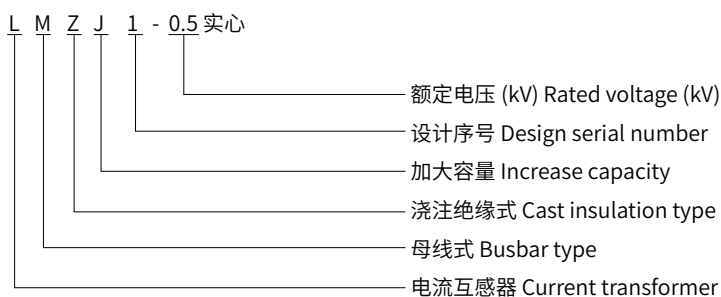



电流比 (A) Current ratio	额定负荷 (VA) Rated load				穿心匝数 Number of turns through the heart	外形及安装尺寸 Outline overall and installing dimensions
	0.5	0.5S	0.2	0.2S		
5/5	5	5	5	5		
10/5	5	5	5	5		
15/5	5	5	5	5		
20/5	5	5	5	5		
30/5	5	5	5	5		
50/5	5	5	5	5		
75/5	5	5	5	5		
100/5	5	5	5	5		
150/5	5	5	5	5		
200/5	5	5	5	5		
300/5	5	5	5	5		
400/5	5	5	5	5		
500/5	5	5	5	5		
600/5	5	5	5	5		

订货须知 Order instructions

- 用户在订货时，需提供以下信息：
- 1、产品型号 Model；电流比；额定输出及相应准确级；
例如：订货 LMZJ1-0.5 实心，电流比 150/5A、额定输出 5VA、准确级 0.5 的互感器。
订货代号为 LMZJ1-0.5 实心 150/5A 5VA 0.5。
 - 2、如有特殊要求时，可与厂家协商定制。

- When placing an order, the user needs to provide the following information:
- 1. Product Model Current ratio Rated output and corresponding accuracy level;
For example: Order the LMZJ1-0.5 solid transformer with a current ratio of 150/5A, a rated output of 5VA, and an accuracy class of 0.5.
The order code is LMZJ1-0.5 solid 150/5A 5VA 0.5.
 - 2. If there are any special requirements, customization can be negotiated with the manufacturer.