

MJGX-3FA

Circuit plate solid state relay

电路板式固态继电器



产品特点

Product Characteristics

- 交流输出：采用双向可控硅输出，零电压开启，零电流关断。
- 输入信号与TTO和COMS数字逻辑电路兼容。
- 输入回路与输出回路之间光隔离。
- 输入端-输出端之间隔离耐压2500V。
- 双列直插式线路板焊接式安装，标准模数化尺寸。
- 100%负载电流老化试验，通过欧共体CE认证，国内3C认证。
- AC output: two-way thyristor output, zero voltage on, zero current off.
- The input signal is compatible with TTO and COMS digital logic circuit.
- Optical isolation between input loop and output loop.
- The isolation voltage between input and output is 2500V.
- Double-row in-line circuit board welding installation, standard modular size.
- 100% load current aging test, through the European Community CE certification, 3C certification.



主要技术参数

Main Technical Parameters

项目 Item	参数 Parameters
负载电压 Load Voltage	220VAC / 380VAC
负载电流 Load Current	2A,3A
控制电压 Control Voltage	3-32VDC
控制电流 Control Current	5-15mA
通态压降 On Voltage	≤1.2V
通态漏电流 On-state leakage current	≤1.5mA
断态时间 On-off Time	≤10mS
介质耐压 Dielectric Strength	1500VAC
绝缘电阻 Insulation Resistance	500MΩ / 500VDC
环境温度 Ambient Temperature	-25~+70℃
安置方式 Mounting Methods	印制板式 Printed plate P、C、B
工作指示 The work instructions	/
重量 Weight	20g


注意事项

Matters needing attention

- 负载电流高于5A时必须使用散热器，固态继电器底板与散热器安装面之间涂上导热硅脂，40A以上加风扇强冷或水冷。
- 使用在感性负载时，需要在输出端接入双向稳压二极管或压敏电阻(MOV)。压敏电阻推荐取额定电压的1.6-1.9倍。
- 为了避免固态继电器的温升超过允许值，两只或多只固态继电器并排安装时，应留有适当的间距。
- 当使用多只固态继共用一个控制电源时，输入端即可以串联使用也可以并联使用。
- When the load current is higher than 5A, the heat sink must be used. Apply thermal grease between the solid state relay bottom plate and the heat sink mounting surface, and add strong fan cooling or water cooling above 40A.
- When used in inductive loads, it is necessary to connect a bidirectional voltage regulator diode or varistor (MOV) at the output end. The varistor is recommended to be 1.6-1.9 times the rated voltage.
- In order to avoid the temperature rise of the solid-state relay exceeding the allowable value, two or more solid-state relays should be installed side by side with appropriate spacing.
- When multiple solid-state relays are used to share a control power supply, the inputs can be used in series or in parallel.

外形及安装尺寸 / 接线图

Outline and mounting dimensions/wiring diagram (mm)

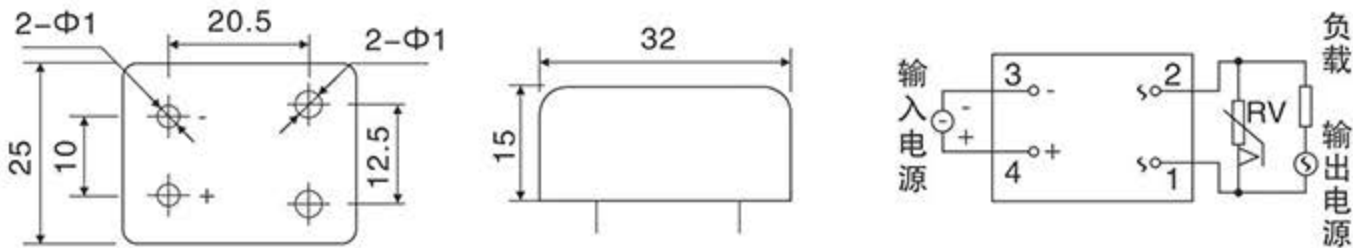

32.0L x 25.0W x 15.0H