

Car Workshop Light Installation Manuel


Model: ZT1028

--Version:ZT1028 V7.1



Image 1 shows how the copper connectors are supposed to look.

Image 2 and Image 3 show damaged copper connectors, which happens when the units are pushed together with excessive force.

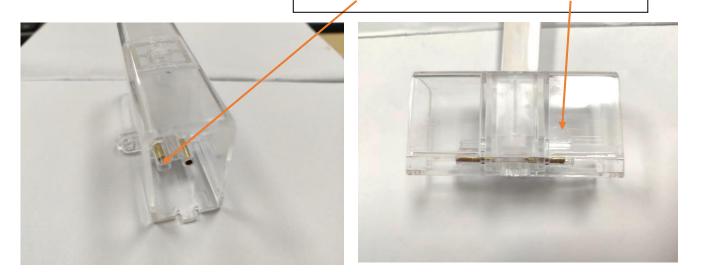

If two units do not seem to fit together easily, double check that the connectors are accurately lined up or try using a different lamp. Do not force the connection.

Test the entire light set with a multimeter before hooking up to an electrical source and before mounting to the ceiling.

It is recommended to completely read this manual before assembling the product.


GONENGO LED LIGHTING

Contents

1.	Design Sketch·····2
2.	Parts List2
3.	Other Parts List 2
4.	Technical Data······3
5.	Assembling Instruction 3
6.	Circuit Diagram 5
7.	Mounting Instruction 6

Design sketch

(Please carefully read the "Circuit Diagram" before assembling)

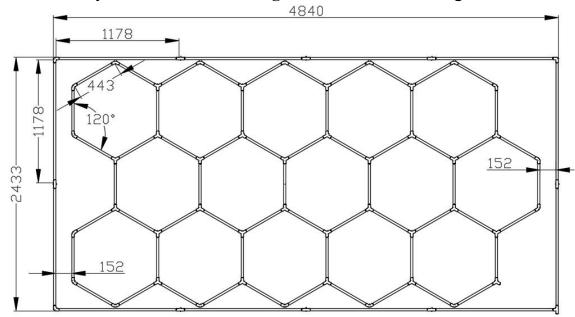

Parts List

No.	Name	Specification	QTY	Unit	QC	Μ
1	tubes	Size: 440*20mm Power: 6w	60	pieces		
2	tubes	Size: 1185*20mm Power: 16w	12	pieces		
3	connectors	90° 2-way white	3	pieces		
4	connectors	180° 2-way white	8	pieces		
5	connectors	T-shaped 3-way white	1	pieces		
6	connectors	120° 2-way white	16	pieces		
7	connectors	120° Y connector white	30	pieces		
8	cable	0.3m 1-end	3	pieces		
9	Zip ties	0.3m 60pieces/bag	1	bag		
10	installation instruction	-	1	pieces		

Other Parts List

Provided by buyers

No.	Name	Specification	QTY.	Unit	PIC
1	Wires	$\geq 1.5 \text{mm}^2$ for wiring	5-15	m	


GONENGO LED LIGHTING

Technical Data				
Voltage	AC110V			
Power	552W			
Current	10A			
Luminous Flux	110-120lm/w			
CRI.	>90			
CCT.	6500K (White)			


Assembling instruction

1. Put all the lamps and connectors on the ground (as below picture).

1.2m lamps for outer rectangle frame, 0.44m lamps for inner hexagonal structure, and the position of different connectors as below picture:

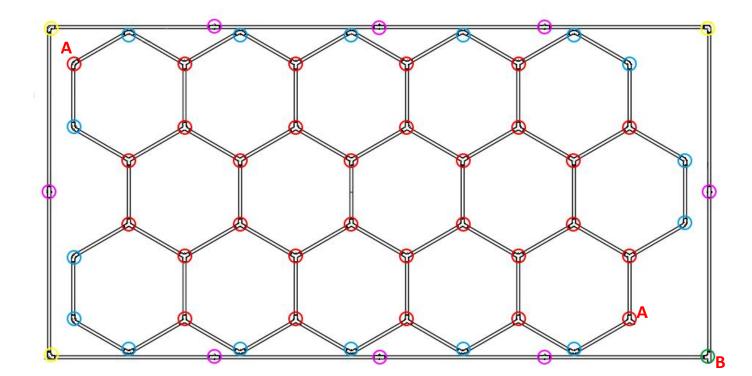


GONENGO LED LIGHTING

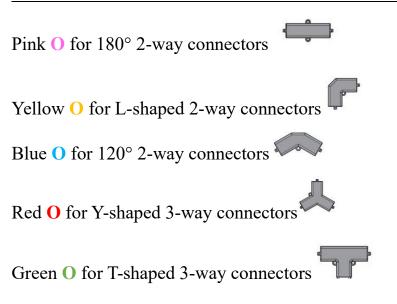


2. Connect the tubes (Please be careful while connecting tubes with the connectors, or the

copper needle in the connectors would be damaged)

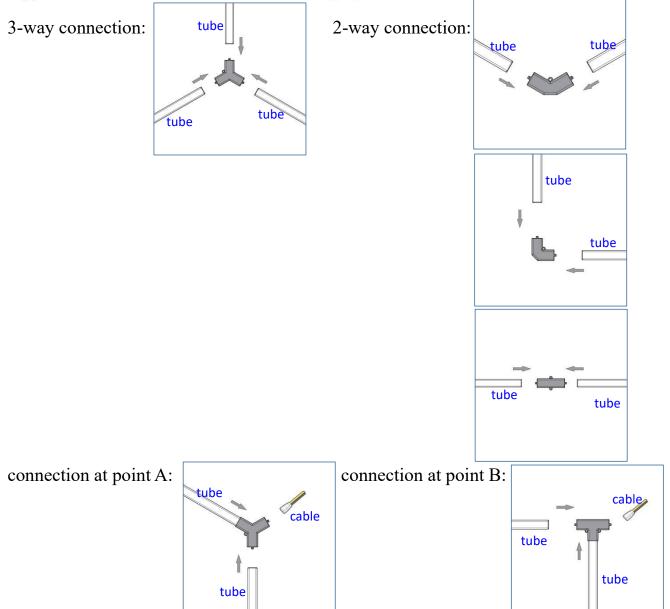

Circuit Diagram

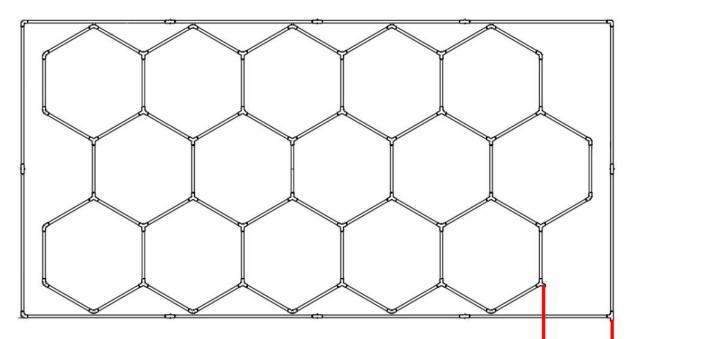

Caution!

AC110V

1. About the cable:

Red wire—Live Line

Blue wire—Null line

Yellow wire—Earth Line or Ground line

2. There are only 3 points for cable connection of the whole structure, parallel connecting the 3 cables and wiring to AC220V

- **3. TEST BEFORE FIXING TO THE CEILING.**
- 4. Please installed by professional electrician.


Mounting instruction

How to fix it on the ceiling?


A grid roof



Tie it with zip ties



B flat roof

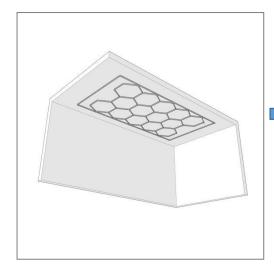

Screw the connector from the hole to the ceiling directly

