


产品规格书

Product Specification

分支电缆

Solar PV Wiring Harnesses

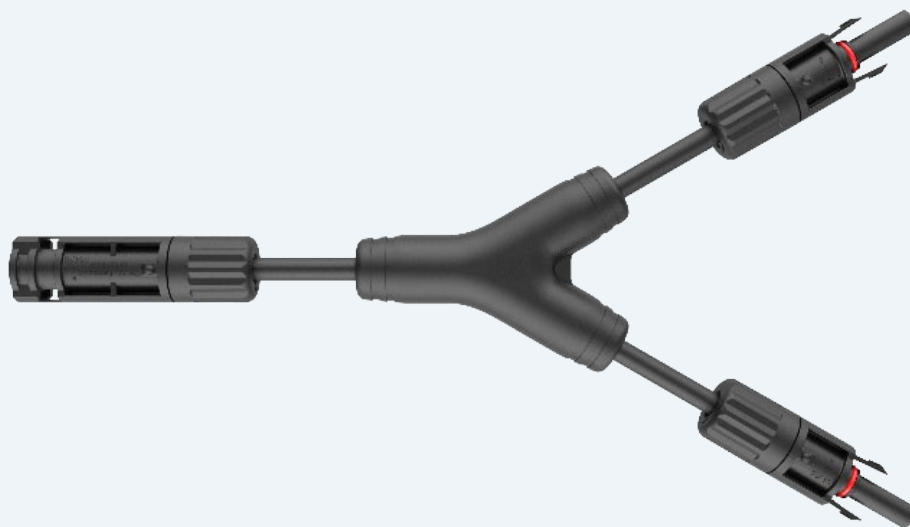


目录

01/ 产品外观及设计性能参数 / Product appearance and design
performance parameters 01

02/ BOM 清单 / BOM List 03

03/ 图纸 / Drawing 04

1. 产品外观及设计性能参数要求 / Product appearance and design performance parameters


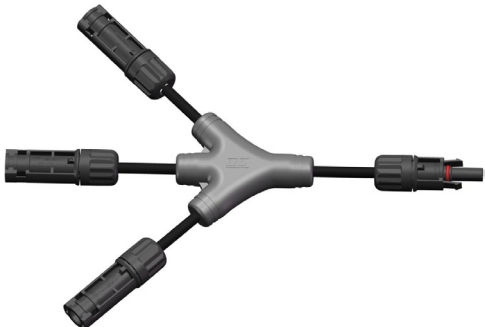
产品型号	外观
QC-Y	
QC-R	
QC-T	
QC-X	
QC-M	



电缆特性 Features	
额定电压 Rated voltage	1500V
额定电流 Rated current	参考所搭配连接器的电流 Refer to the current of the matching connector
环境温度 Applicable environment temperature	-40°C~ +85°C
IP 等级 IP degree	IP68 (1m,1h)
本体材质 Body Materials	TPV
连接器型号 Connector type	QC4.10-1000V/QC4.10-1500V/QC4.10-PLUS/ MC4/MC4-EVO2....
连接器材质 Connector Materials	PPE/PA
连接器配置 Connector configuration	2F1M/2M1F/3F1M/3M1F
电缆规格 Cable size	4mm ² 、6mm ² 、10mm ² /12AWG、10AWG、8AWG
电缆长度 Cable length	L1=100mm/L2=customized


2.BOM 清单 / BOM List

苏州快可光伏电子股份有限公司 QC Solar (Suzhou) Corporation					
产品名称 Product name	分支电缆 Solar PV Wiring Harnesses	材料清单 Bill Of Materials		版 本 Version	A/0
产品型号 Product	QC-Y/R/T/X/M			张 数 Page	1
客 户 Customer	/			发行日期 Version Date	2023.07.24
序号	名 称 Name	材 质 Material	生产厂商 Manufacturer	数 量 Quantity	备 注 Remark
1	本体 Body	TPV	QC Solar	1 pcs	
2	线缆 Cable	XLPE	QC Solar	1 pcs	
3	连接器 Connector	PPE/PA	QC Solar	1 pcs	
以上原料符合欧盟 ROHS 要求 Above materials matched the ROHS rules					
制 表： Written By:		审 核： Checked by:		批 准： Approved By:	

3.图纸/ Drawing of connector

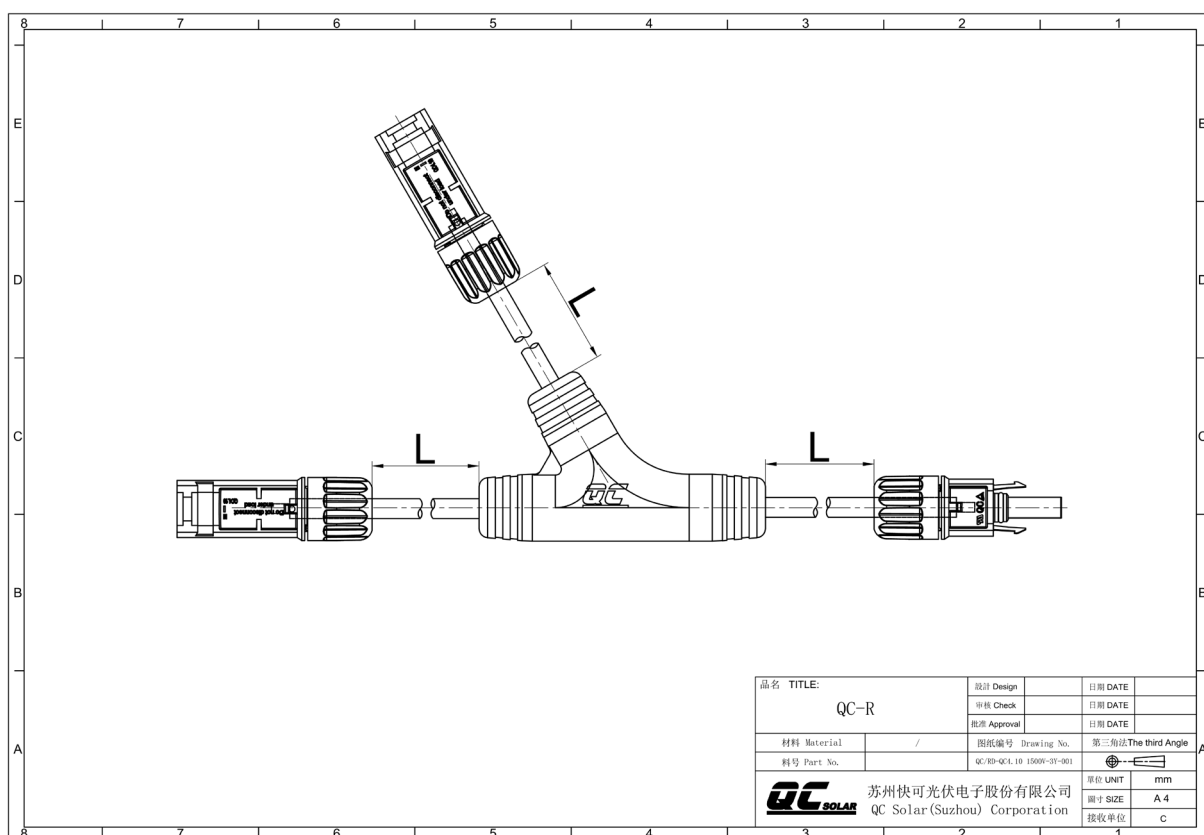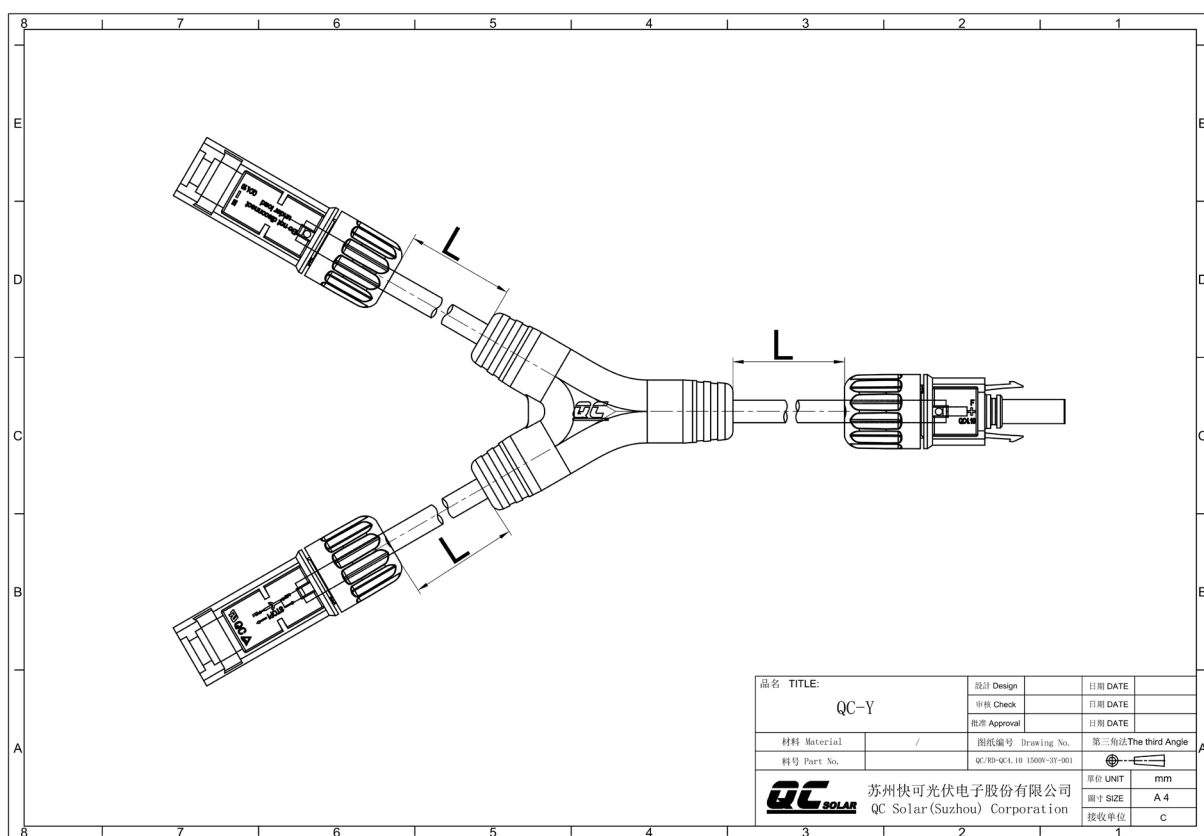

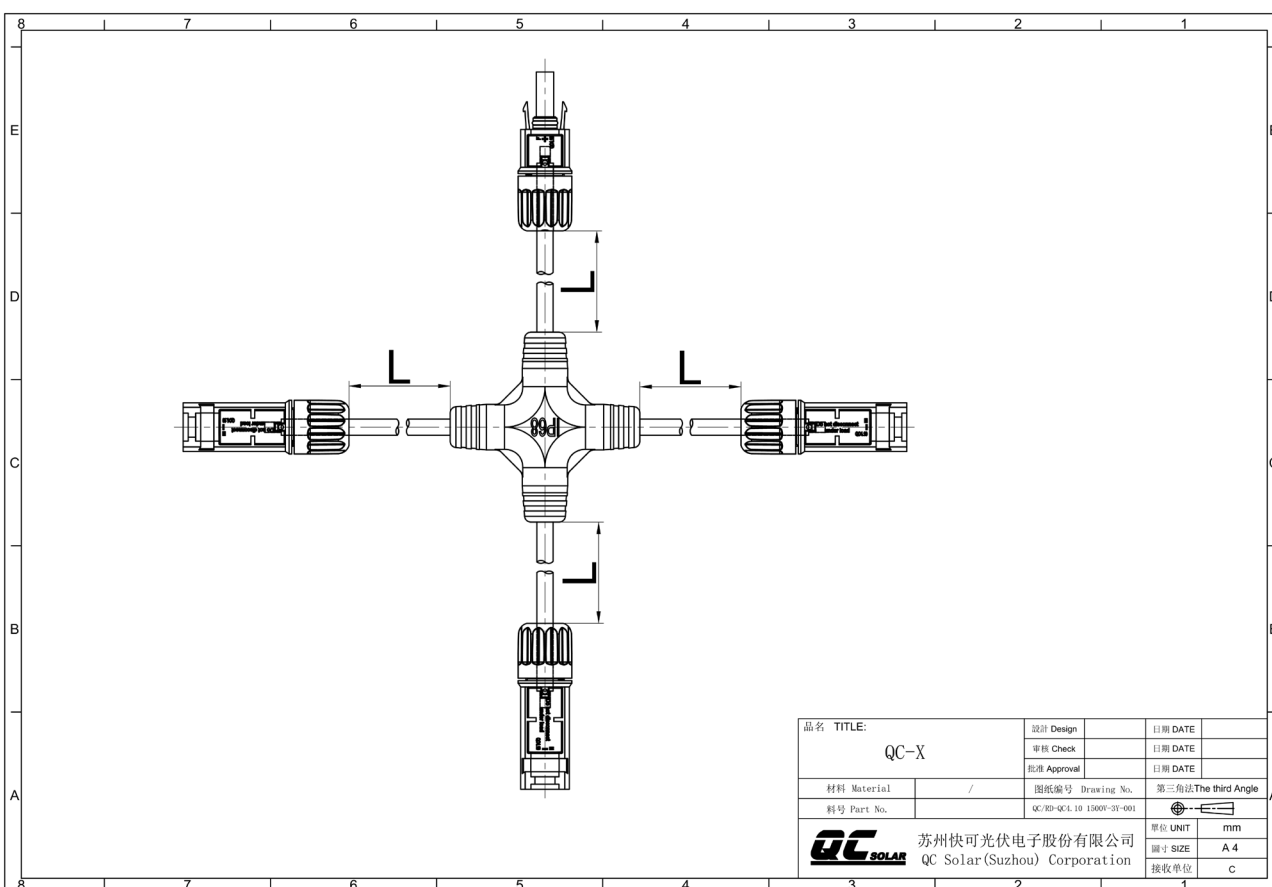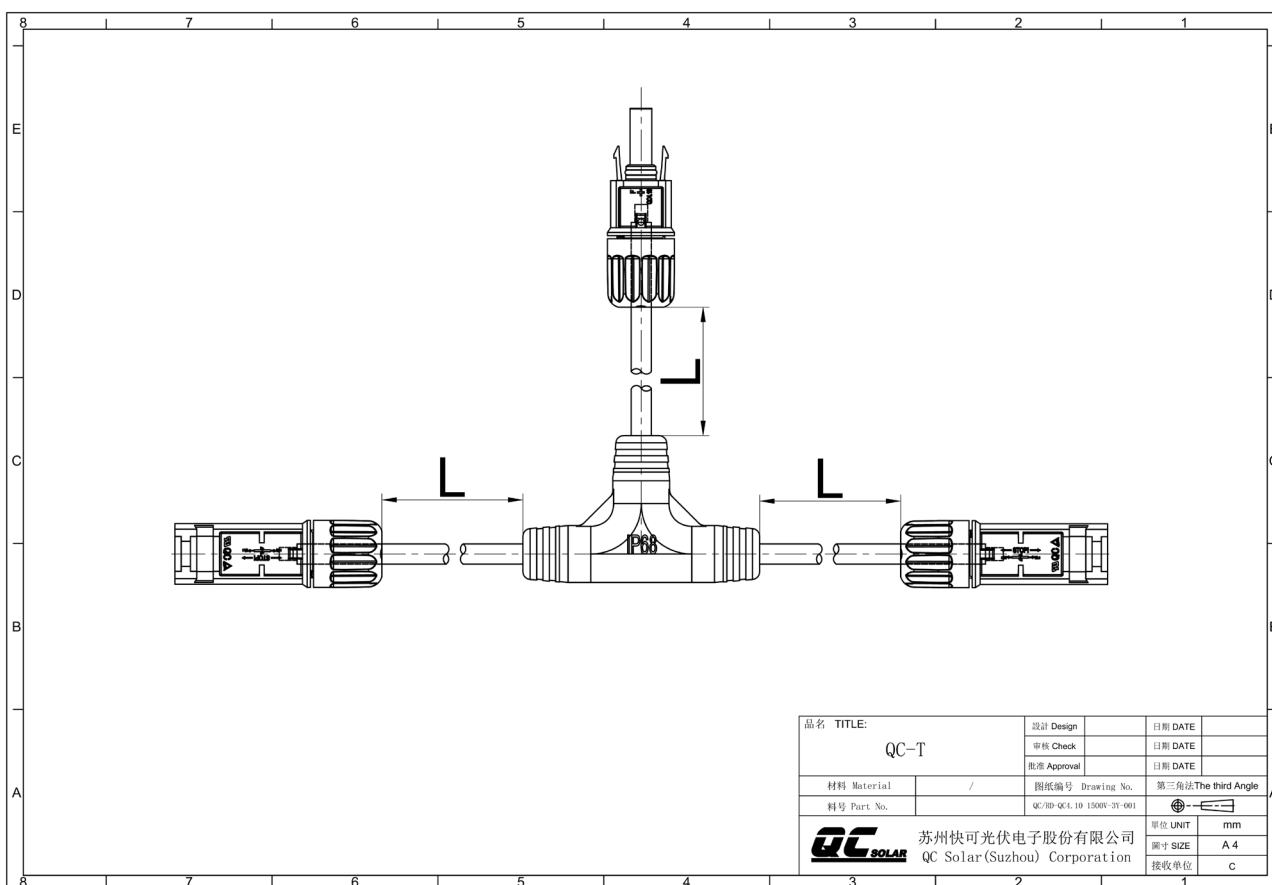

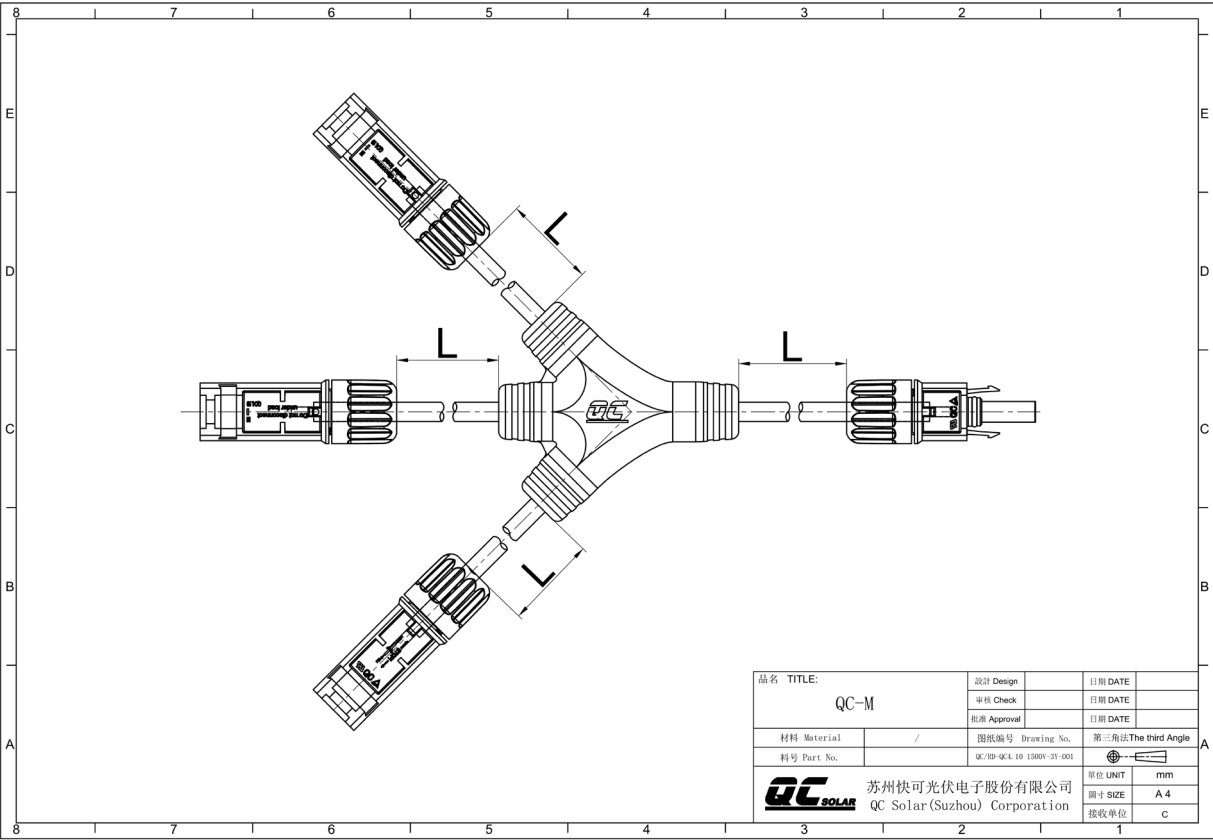

快速可靠, 成就客户!

Quick and reliable, QC Solar devotes to satisfying customers.



苏州快可光伏电子股份有限公司

QC Solar (Suzhou) Corporation



中国苏州工业园区新发路 31 号 (No.31,Xinfa Road,SIP,Suzhou,China, 215123.)



0086-0512-62603392



market@quick-contact.com



www.quick-contact.com



快可官方微信