


产品规格书 Product Specification

产品外观及设计性能参数 / Product appearance and technical parameters

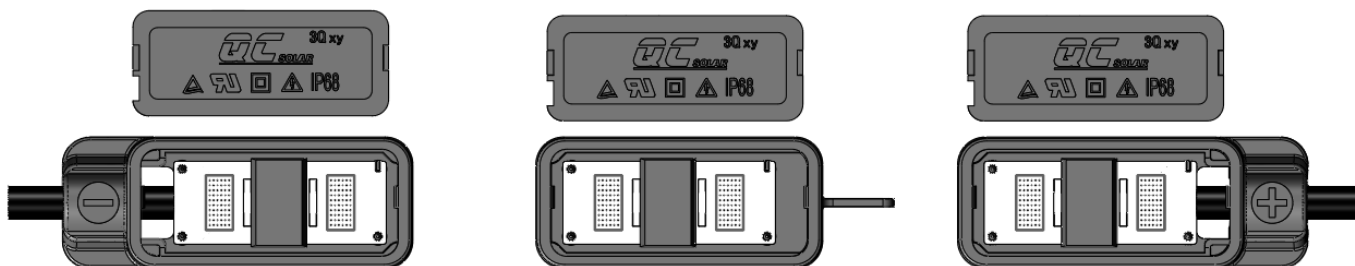

技术参数 Product Specifications


产品名称 Product Name	3Qxy (1500V, 电镀) 3Qxy (1500V, electroplating)
额定电压 Rated Voltage	IEC 1500V/UL 1500V
额定电流 Rated Current	18A Diode: QCM1845 20A Diode: QCM2545 22A Diode: QCM3045 25A Diode: QCM4045 28.5A Diode: QCM4045B 30A Diode: QCM5045/QCM5045B 32A Diode: QCM5045C 35A Diode: QCM6045
灌胶量 Glue Potting Volume	3*6.3mL
线缆规格 Cable Specification	10AWG/12AWG/4mm ² /6mm ²
应用等级 Application Class	Class A
温度范围 Temperature Range	-40°C ~ +85°C
防护等级 Protection Degree	IP68
汇流带尺寸 Size of Ribbons	Max.8mm
TUV 证书编号 TUV Certificate NO	R50510013 (莱茵) No.B 077362 0009 Rev.06 (南德)
UL 证书编号 UL Certificate NO	E312223
防火等级 Flame Class	5VA

可搭配的连接器的 / Compatible connectors

制造商 Manufacturer	型号 Type	证书 Approval
QC Solar (Suzhou) Corporation	QC4.10-cds	TÜV SÜD B 077362 0004Rev.05& TÜV:R50505605
	QC4.10-ABCDEFGH	UL: E340004
Stäubli Electrica Connectors AG	PV-KST4/xy-UR PV-KBT4/xy-UR	TÜV:R60127190 UL:E343181
	PV-KST4-EVO2/xy-UR PV-KBT4-EVO2/xy-UR	TÜV:R60127169 UL:E343181
	PV-KST4-EVO2A/xy-UR PV-KBT4-EVO2A/xy-UR	

注：更多搭配，请联系苏州快可光伏电子股份有限公司。
Note: For more information on matching, please contact QC Solar (Suzhou) Corporation.

接线盒图档 / Drawing of junction box

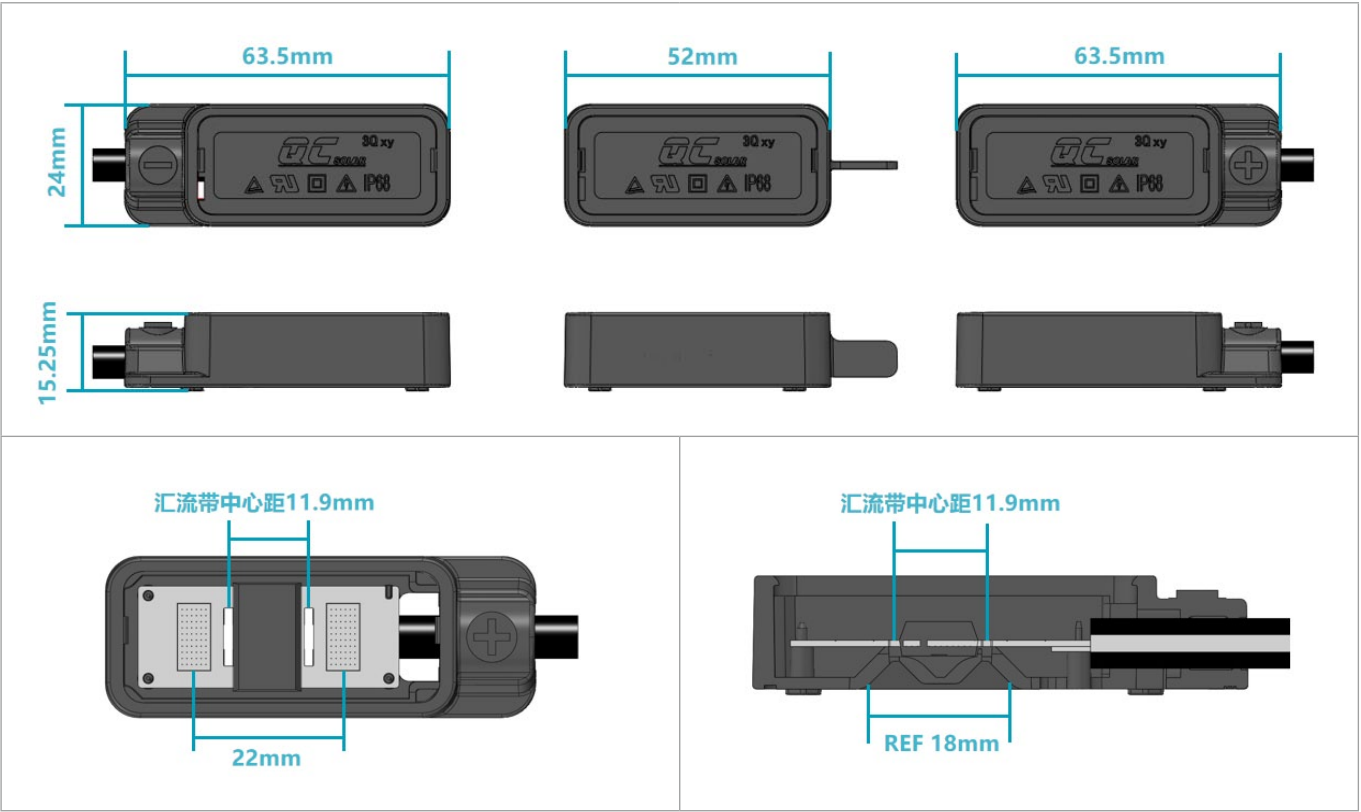

注：本文件如有更改，恕不另行通知。解释权归苏州快可光伏电子股份有限公司所有。
Note: This document is subject to change without notice. The right of interpretation belongs to QC Solar (Suzhou) Corporation.