


产品规格书 Product Specification

产品外观及设计性能参数 / Product appearance and technical parameters

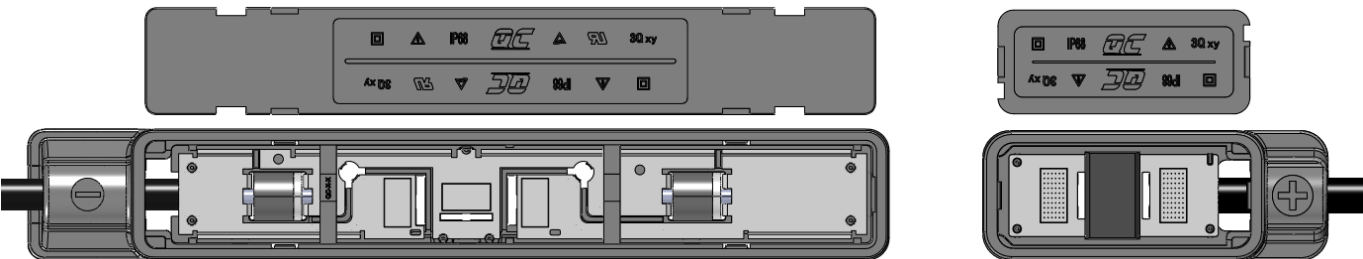

技术参数 Product Specifications	
产品名称 Product Name	3Qxy (3 Q - M 2 四分片双轴式接线盒) 3Qxy (3Q-M2 dual-axis diode PV junction box designed for quad-cut cell module)
额定电压 Rated Voltage	IEC 1500V/UL 1500V
额定电流 Rated Current	25A、30A
灌胶量 Glue Potting Volume	1*19mL + 1*6.3mL
线缆规格 Cable Specification	10AWG/12AWG/4mm ² /6mm ²
应用等级 Application Class	Class A
温度范围 Temperature Range	-40℃ ~ +85℃
防护等级 Protection Degree	IP68
汇流带尺寸 Size of Ribbons	Max.8mm
TUV 证书编号 TUV Certificate NO	/
U L 证书编号 UL Certificate NO	/
防火等级 Flame Class	5VA


可搭配的连接器的 / Compatible connectors

制造商 Manufacturer	型号 Type	证书 Approval
QC Solar (Suzhou) Corporation	QC4.10-cds	TÜV SÜD B 077362 0004Rev.05& TÜV:R50505605
	QC4.10-ABCDEFGH	UL:E340004
Stäubli Electrica Connectors AG	PV-KST4/xy-UR PV-KBT4/xy-UR	TÜV:R60127190 UL:E343181
	PV-KST4-EVO2/xy-UR PV-KBT4-EVO2/xy-UR	TÜV:R60127169 UL:E343181
	PV-KST4-EVO2A/xy-UR PV-KBT4-EVO2A/xy-UR	

注：更多搭配，请联系苏州快可光伏电子股份有限公司。

Note: For more information on matching, please contact QC Solar (Suzhou) Corporation.

接线盒图档 / Drawing of junction box

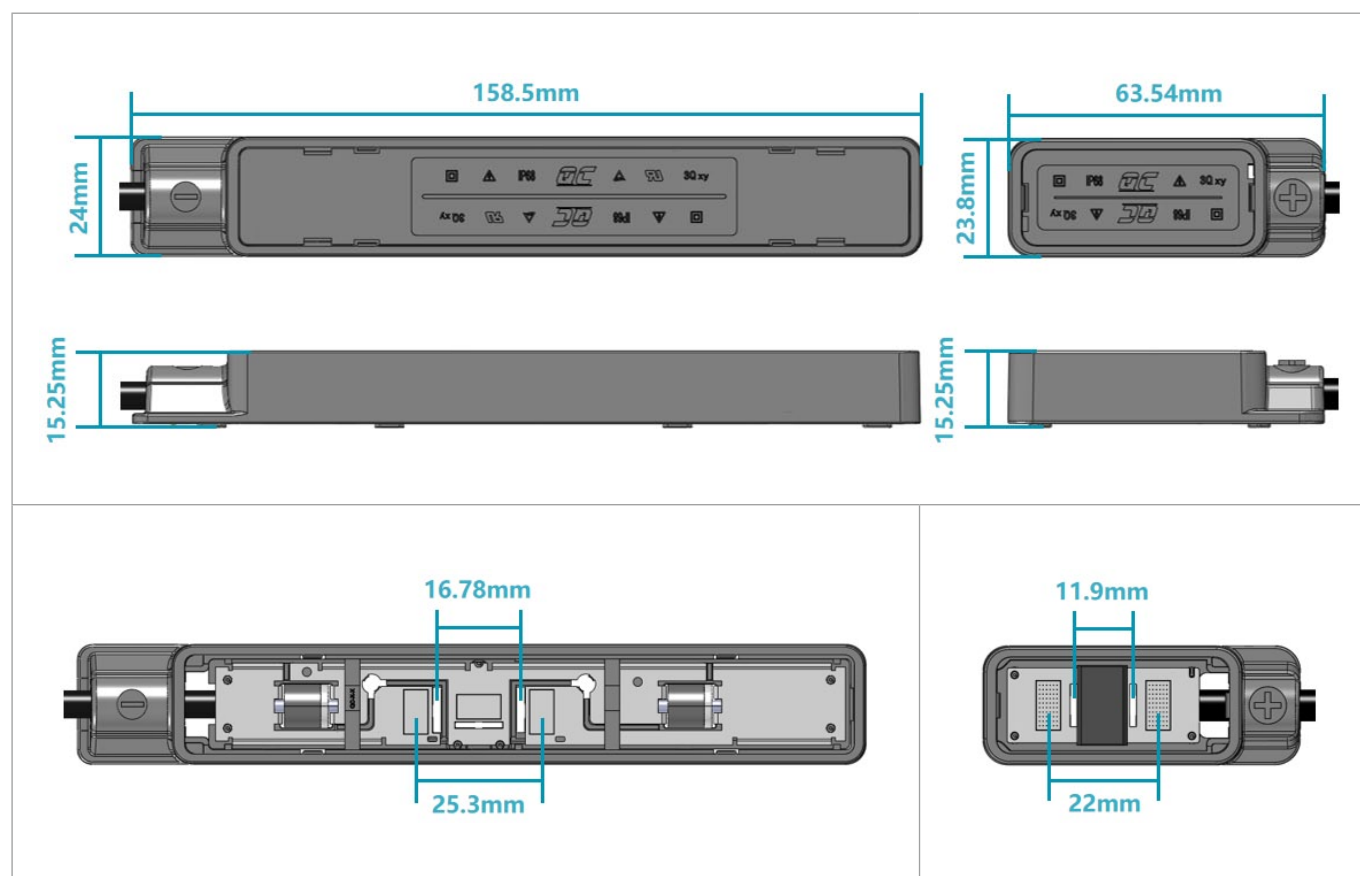

注：本文件如有更改，恕不另行通知。解释权归苏州快可光伏电子股份有限公司所有。

Note: This document is subject to change without notice. The right of interpretation belongs to QC Solar (Suzhou) Corporation.