

产品规格书 Product Specification

产品外观及设计性能参数 / Product appearance and technical parameters




性能参数 Performance Parameters

名称 Product Name	QC4.F-abcde
证书编号 Certificate NO	DEKRA: 31-120416
保险丝电流 Rated Current	1A~63A
额定电压 Rated Voltage	1500V
温度范围 Temperature Range	-40°C~ +85°C
污染等级 Class Of Pollution	II

防护等级 IP Degree	IP68
连接器电阻 Contact resistance	$\leq 0.5\text{m}\Omega$
绝缘材料 Insulation material	PC、PA
连接器电阻 Contact resistance	$\leq 0.5\text{m}\Omega$
金属导体材料 Contact material	铜,镀锡 Copper,Tin plated
阻燃等级 Flame class	V0
安全等级 Safety degree	II
适配电线规格 Suitable cable cross sections	2.5mm ² 、4mm ² 、6mm ² 、10mm ² 、16mm ²
适配保险丝尺寸(mm) Suitable for fuse size(mm)	10*85 or 14*85
适配连接器型号 Connector model	QC4.10系列、客户指定型号 QC4.10 series, customer-specified model
温度上限 Upper limiting temperature	125°C
产品标准 Product standard	IEC62852、IEC60269-6

连接器图档 / Connector drawing

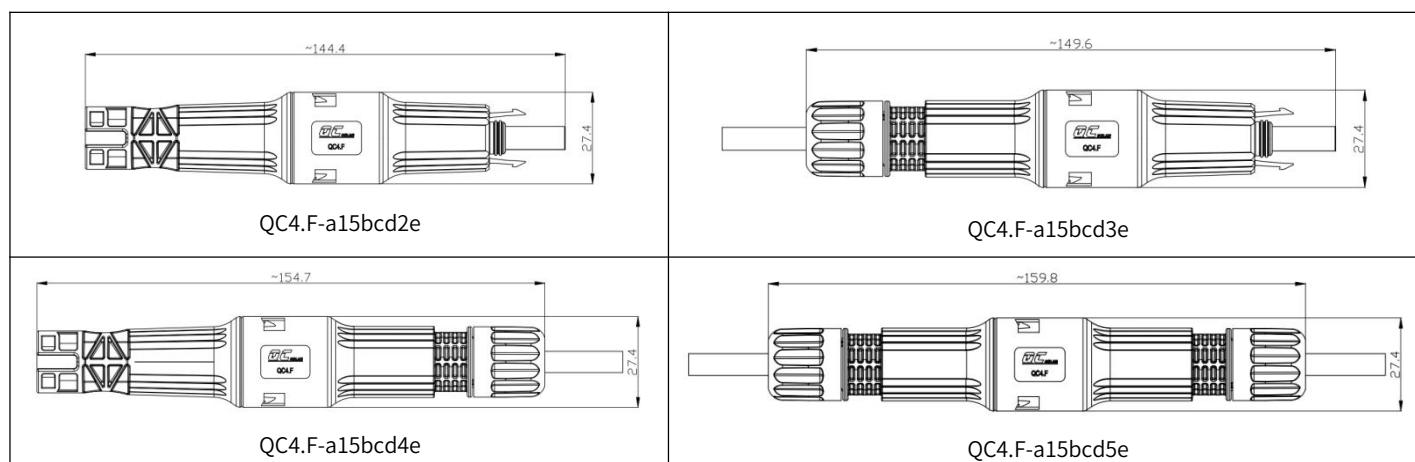

注：本文件如有更改，恕不另行通知。解释权归苏州快可光伏电子股份有限公司所有。

Note: This document is subject to change without notice. The right of interpretation belongs to QC Solar (Suzhou) Corporation.