
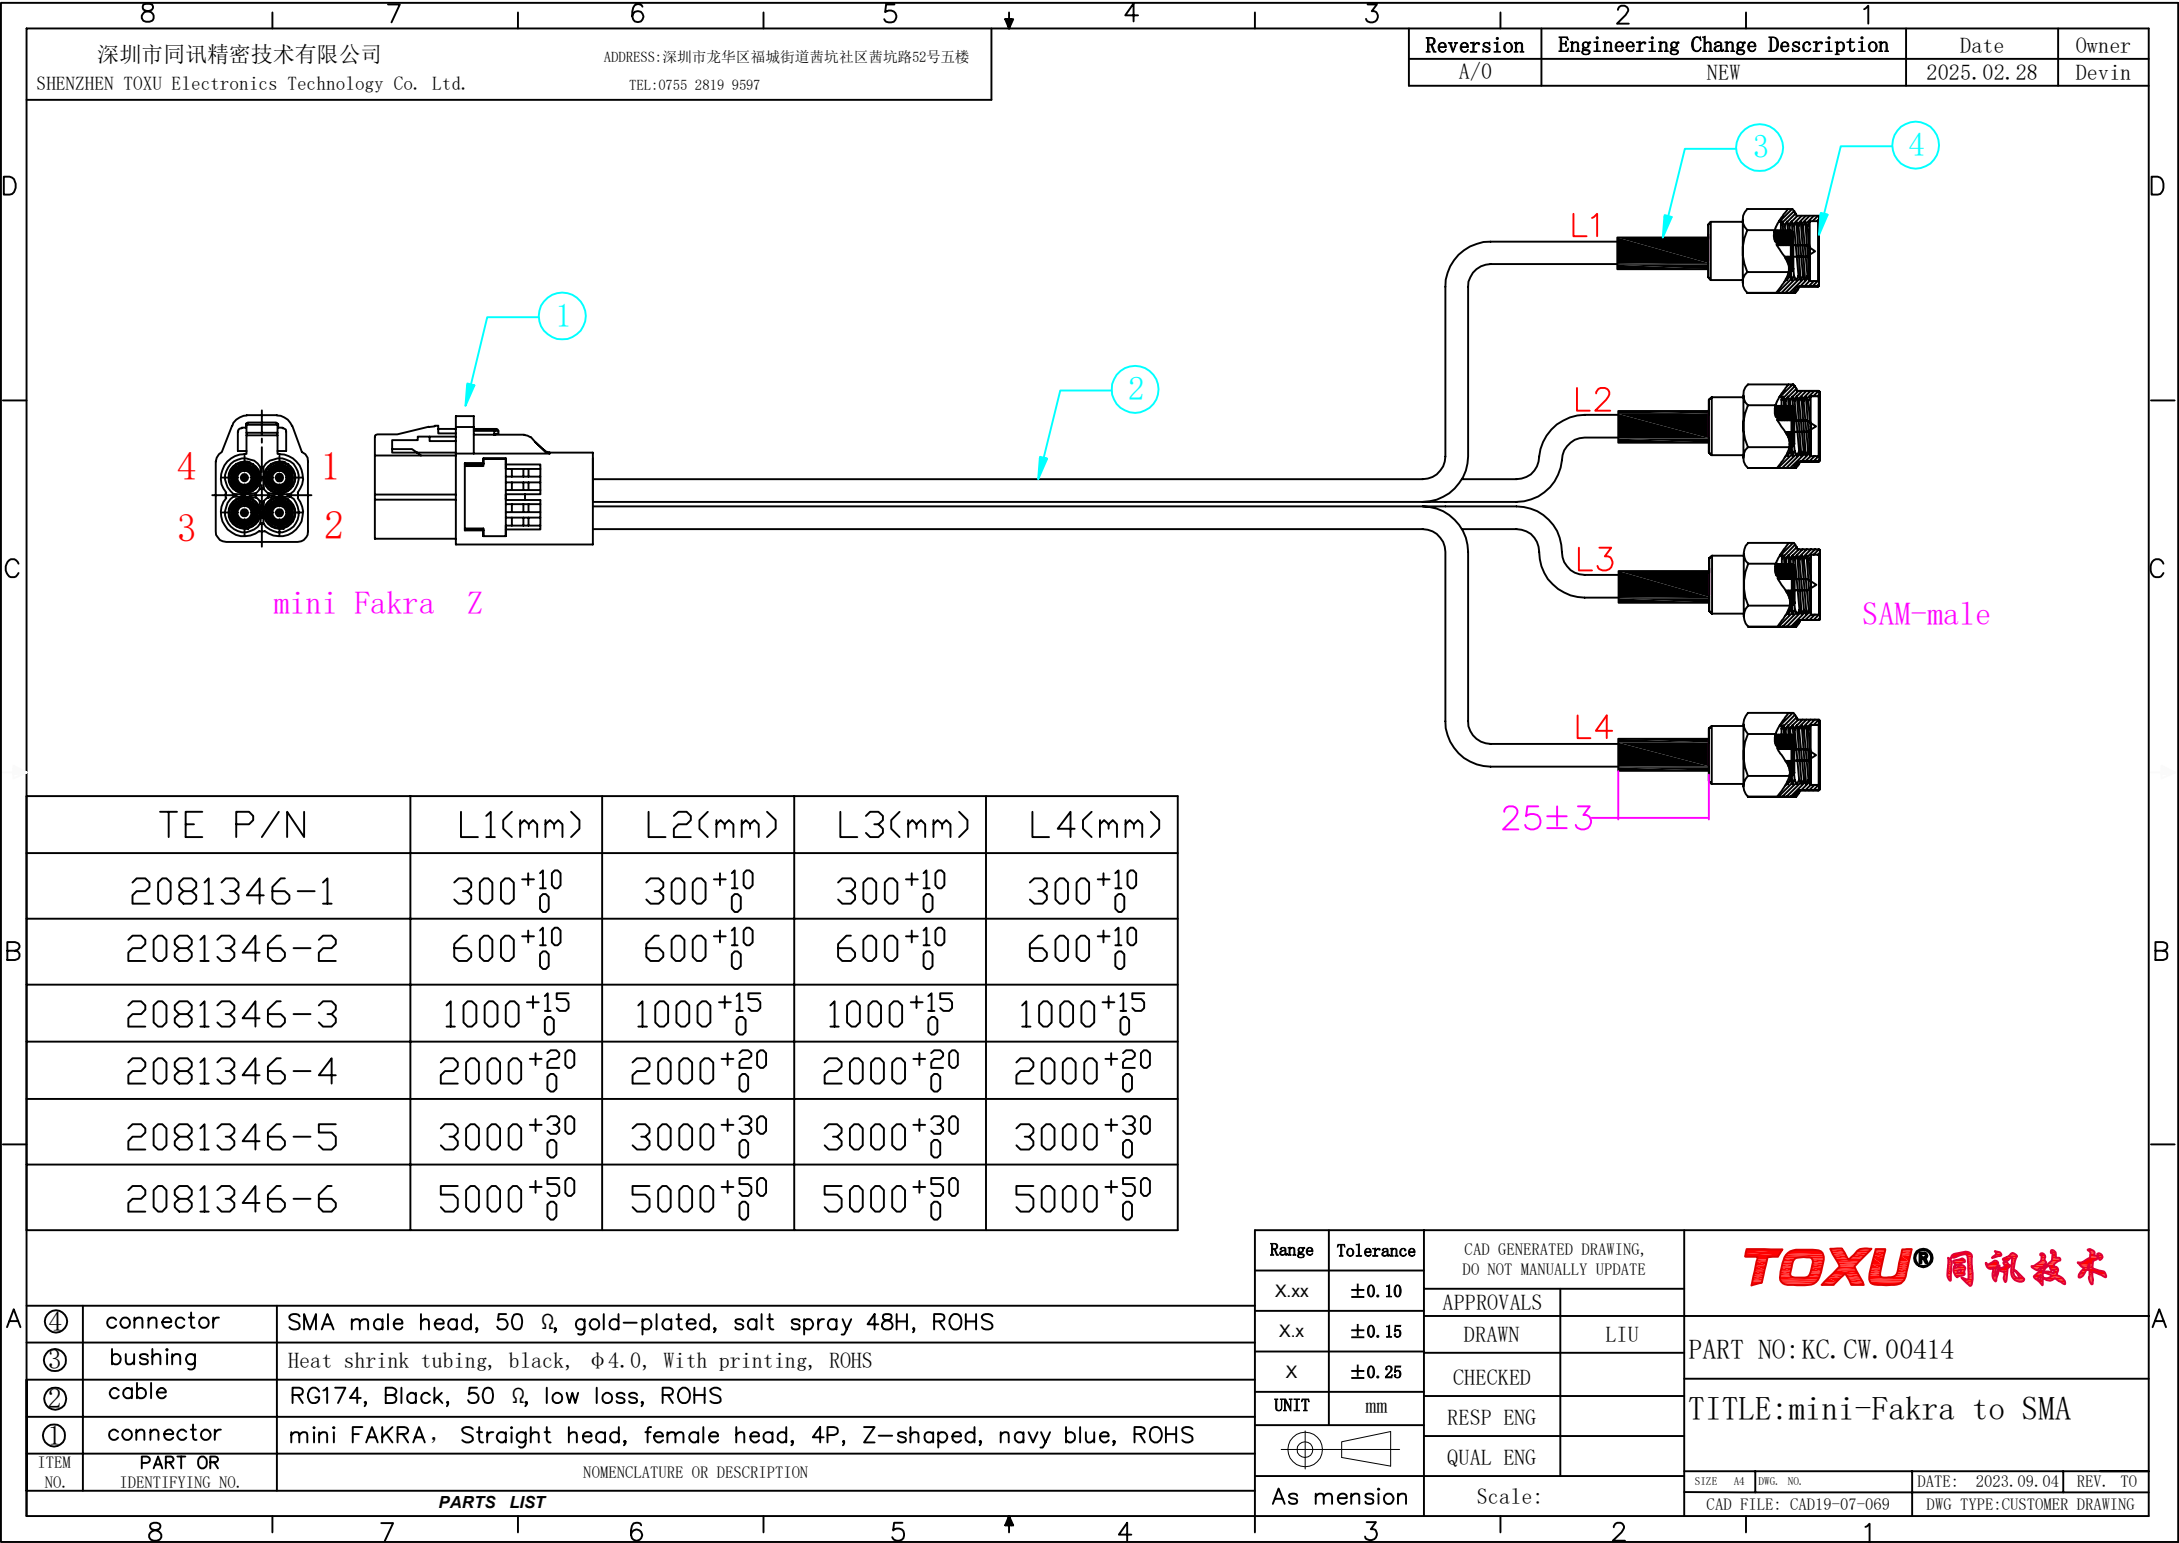




TE P/N	L1<mm>	L2<mm>	L3<mm>	L4<mm>
2081346-1	300 ⁺¹⁰ ₀	300 ⁺¹⁰ ₀	300 ⁺¹⁰ ₀	300 ⁺¹⁰ ₀
2081346-2	600 ⁺¹⁰ ₀	600 ⁺¹⁰ ₀	600 ⁺¹⁰ ₀	600 ⁺¹⁰ ₀
2081346-3	1000 ⁺¹⁵ ₀	1000 ⁺¹⁵ ₀	1000 ⁺¹⁵ ₀	1000 ⁺¹⁵ ₀
2081346-4	2000 ⁺²⁰ ₀	2000 ⁺²⁰ ₀	2000 ⁺²⁰ ₀	2000 ⁺²⁰ ₀
2081346-5	3000 ⁺³⁰ ₀	3000 ⁺³⁰ ₀	3000 ⁺³⁰ ₀	3000 ⁺³⁰ ₀
2081346-6	5000 ⁺⁵⁰ ₀	5000 ⁺⁵⁰ ₀	5000 ⁺⁵⁰ ₀	5000 ⁺⁵⁰ ₀

④	connector	SMA male head, 50 Ω, gold-plated, salt spray 48H, ROHS
③	bushing	Heat shrink tubing, black, Φ4.0, With printing, ROHS
②	cable	RG174, Black, 50 Ω, low loss, ROHS
①	connector	mini FAKRA. Straight head, female head, 4P, Z-shaped, navy blue, ROHS
ITEM NO.	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION
PARTS LIST		

Range	Tolerance	CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE		TOXU® 同讯技术	
X.xx	±0.10	APPROVALS			
X.x	±0.15	DRAWN	LIU	PART NO: KC. CW. 00414	
X	±0.25	CHECKED			
UNIT	mm	RESP ENG		TITLE:mini-Fakra to SMA	
		QUAL ENG			
As mension	Scale:			SIZE A4	DWG. NO.
				CAD FILE: CAD19-07-069	DATE: 2023.09.04
				DWG TYPE:CUSTOMER DRAWING	REV. TO