

DMG48480C021_04WTC


Features:

- Powered by T5F0 ASIC, running DGUS II HMI platform, commercial-grade smart LCM.
- 2.1 inch circular LCD, 480*480 resolution, IPS-TFT LCD.
- Circular capacitive touch panel.
- LCD and TP optical bonding process, with high structural reliability.



1. Hardware and interface

1.1 Hardware interface diagram

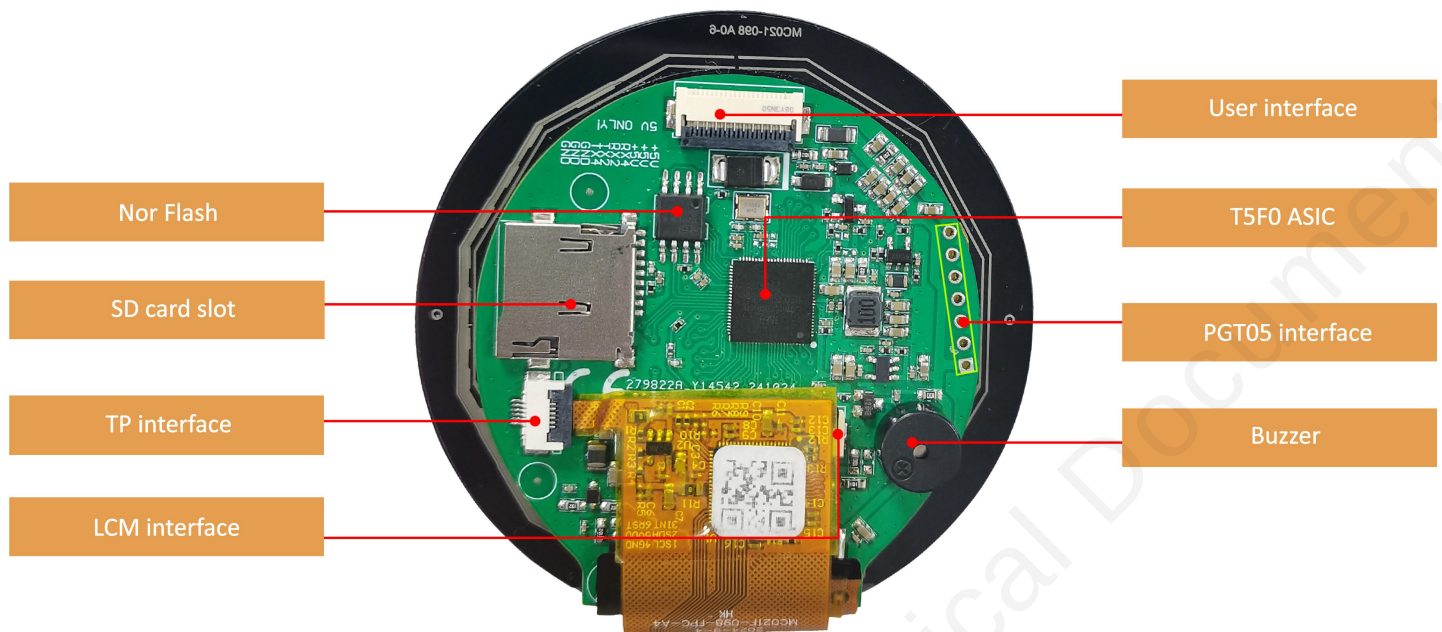

Hardware interface diagram

1.2 Hardware and interface description

No.	Item	Description
1	T5F0 ASIC	DWIN independently developed, mass production in 2023. Dual 8051 cores, GUI and application run on separate 8051 cores.
2	User interface	10Pin_1.0mm socket for power supply and serial communication.
3	Flash	16MBytes (1*16MBytes NOR Flash) for storing UI files like fonts, images, music, with over 100,000 erase/write cycles.
5	Buzzer	3V passive buzzer.
6	SD card slot	For DGUS project file downloads (UI, CFG files, kernel, etc.), 4 Mb/s rate.
8	PGT05 interface	For programming DGUS firmware.

2. Specification parameters

2.1 Display parameters

LCD Type	IPS, TFT LCD.
Viewing Angle	Wide viewing angle (85°/85°/85°/85° typical), high contrast, and good color reproduction.
Resolution	480×480 (support 0°/90°/180°/270°)
Active Area (AA)	D=53.30mm
Backlight	LED
Backlight Service Life	>20000 hours
Brightness	350nit
Brightness Control	100-level brightness adjustment (Flickering may occur at 1%-30% of max brightness; not recommended for use in this range)
Note: Use dynamic screen saver to prevent afterimages from prolonged fixed page display.	

2.2 Touch parameters

Type	Capacitive touch panel.
Structure	G+FF structure with tempered glass surface and hardness ≥ 6H.
Light Transmittance	>85%

2.3 Serial interface parameters

Mode	UART2: ON=TTL/CMOS; OFF=RS232 UART4: ON=TTL/CMOS; OFF=RS232 (Only available after OS configuration)				
Voltage Level	Test Condition	Min	Typ	Max	Unit
	Output 1, Iout = -4mA	2.7	3.2	-	V
	Output 0, Iout = 4mA	-	0.1	0.4	V
	Input 1	2.4	3.3	5.5	V
	Input 0	0	-	1.0	V
Baud Rate	3150~3225600bps, typical value of 115200bps.				
Data Format	UART2: N81 UART4: N81/E81/O81/N82 ,4 modes (OS configuration)				
Interface Cable	10Pin_1.0mm				

2.4 Electrical specifications

Rated Power	<5W	
Operating Voltage	4.5-5.5V, typical value of 5V.	
Operating Current	170mA	VCC=5V, max backlight.
Recommended power supply: 5V 1A DC.		

2.5 Operating environment

Operating Temperature	-20℃ to 70℃ (5V @ 60% RH)
Storage Temperature	-30℃ to 80℃
Anti-UV	None
Conformal Coating	None
Operating Humidity	10%-90%RH, typical value of 60% RH.

3. Reliability test

3.1 Electrostatic discharge test

Test temperature: 25°C. Test humidity: 50%RH.



Test process: Place the product on the test bench fixture (approximately 15cm in height), and perform contact and air discharge tests on the smart LCM. Observe if any freezing, black or white screen, flickering, or rebooting occurs during the test.

Test conclusion: The product's ESD performance meets GB/T 17626.2 Class B standards.

Discharge Type	Discharge Value	Result
Air discharge	±8KV	Normal operation

4. Packaging & dimensions

Form Factor	71.30mm diameter * 11.70mm height			
Net Weight	38g			
Packaging Standards				
Model	Dimensions	Layer	Quantity/Layer	Quantity(Pcs)
Carton1:	220mm(L)×160mm(W)×47mm (H)	-	-	-
Carton2:	250mm(L)×200mm(W)×80mm (H)	1	4	4
Carton3:	320mm(L)×270mm(W)×80mm (H)	1	8	8
Carton4:	450mm(L)×350mm(W)×300mm(H)	-	-	-
Carton5:	600mm(L)×450mm(W)×300mm(H)	2	60	120

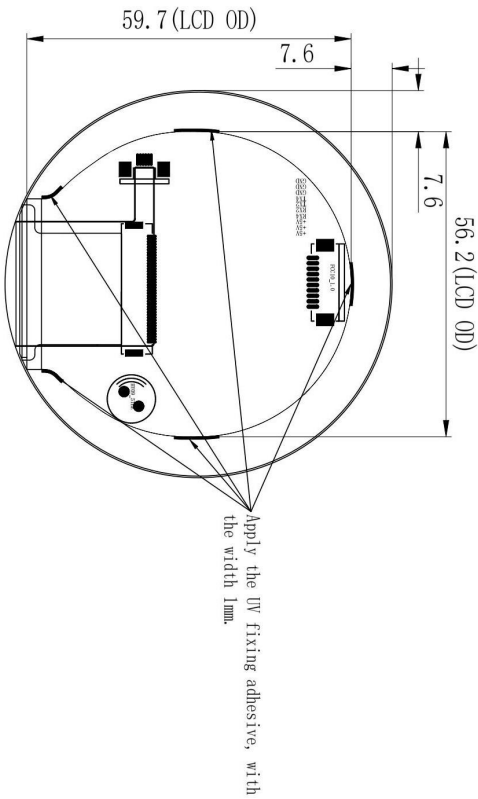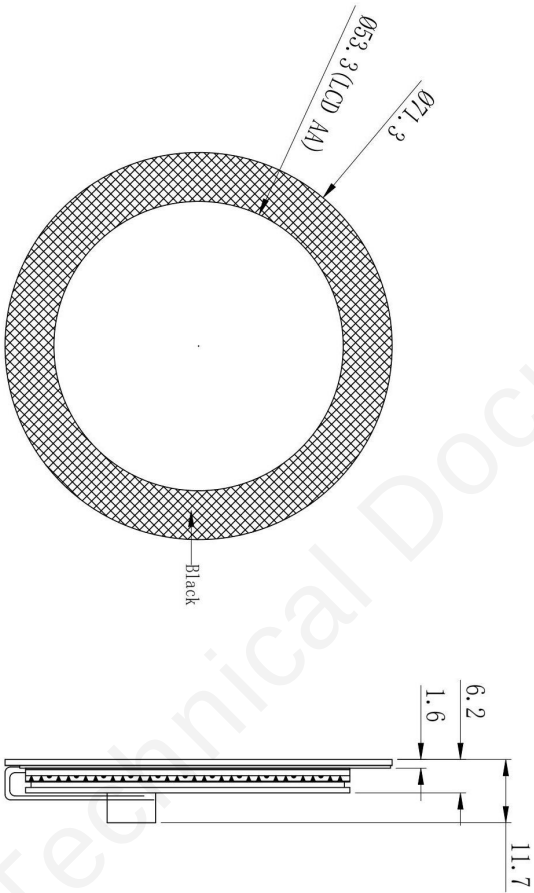

1. Location hole is used as position reference.

2. Unmarked Tolerance is +/-0.3mm


Note: Active area is marked in Dash lines

Definition	Pin#	Type	Description
GND	8, 9, 10	P	GND
TX4	7	0	UART4 Output
TX2	6	0	UART2 Output
RX2	5	I	UART2 Input
RX4	4	I	UART4 Input
+5V	1, 2, 3	P	Power Input

Model	DMG48480C021_04WTC				DWIN Technology			
Drawing	A 4	Drawn	DWIN	Date				
Scale		Review		Date				
Unit	MM	Approval		Date				

5. Debug tools

It is recommended for new users of DWIN smart LCMs to purchase official accessories. For more details, please refer to customer service center.

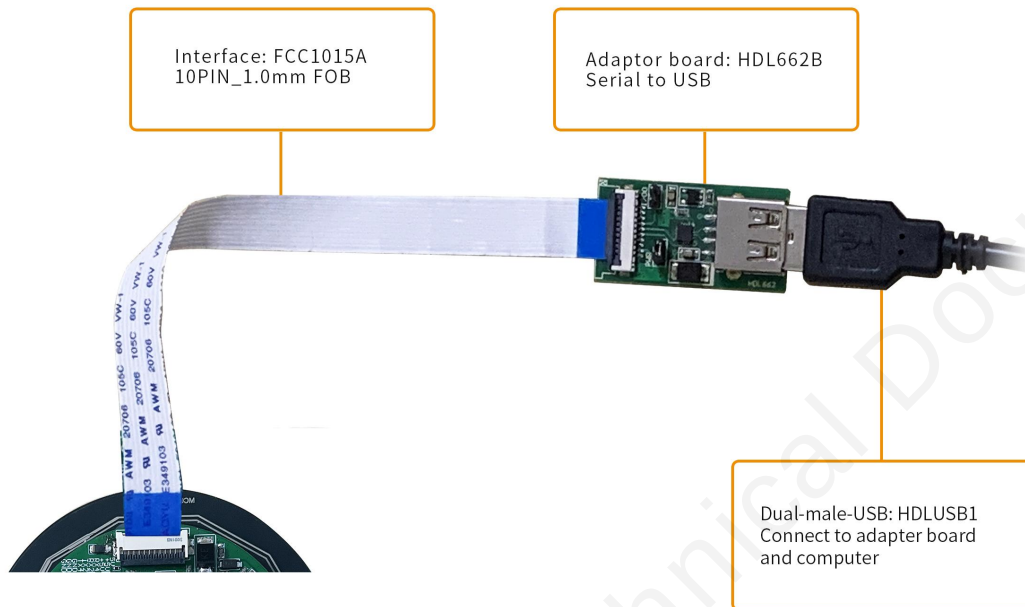

6. Revision records

Rev	Revise Date	Content	Editor
00	2025-02-21	First Edition	Xu Ying

Please contact us if you have any questions about the use of this document or our products, or if you would like to know the latest information about our products:

- Customer service Tel: +86 400 018 9008
- Customer service email: dwinhmi@dwin.com.cn
- DWIN Developer Forum: <https://forums.dwin-global.com/>

Thank you all for continuous support of DWIN, and your approval is the driving force of our progress!

Important Disclaimer

DWIN reserves the right to make any changes to product designs without prior notice.

Customers should ensure strictly adhering to all the relevant standards and requirements during the product application process, including but not limited to functional safety, information security, and regulatory provisions.

DWIN shall not bear any joint and several liability for any consequences that may arise from customers' adoption of DWIN products. In particular, for risks that may lead to significant property losses, environmental hazards, personal injury, or even death, especially in high-risk application areas such as military applications, flammable and explosive places, and life-saving medical equipment, customers should independently assess the risks and take corresponding preventive and protective measures. DWIN shall not bear any relevant responsibility.