

1

2

3

4

5

6

EC No.

EC Description

DR.



/

/

1.6

A

A

B

B

C

C

D

D

E


E

F


F

G

G

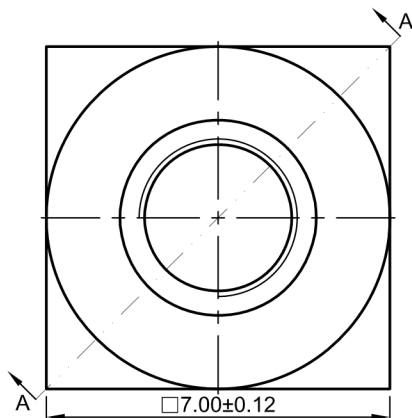

7.00±0.12

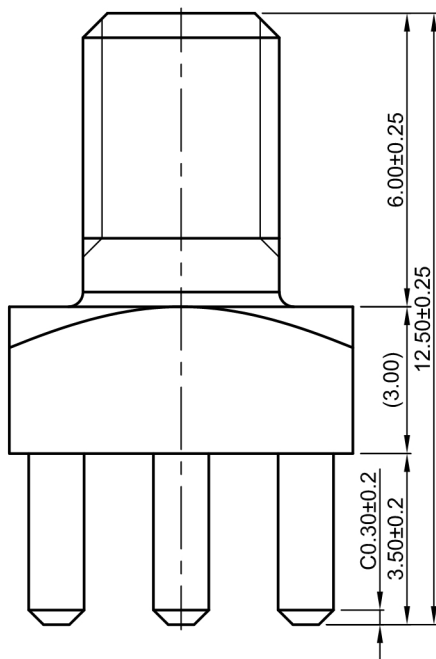


6.00±0.25

12.50±0.25

3.50±0.2


3.00

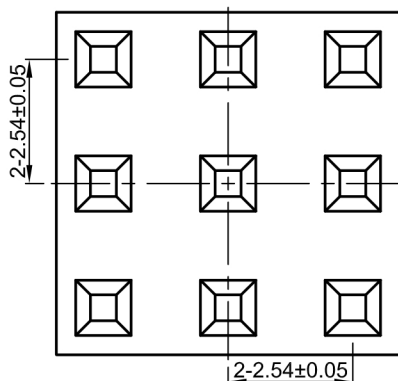


2-2.54±0.05

2-2.54±0.05

M4x0.7-6g

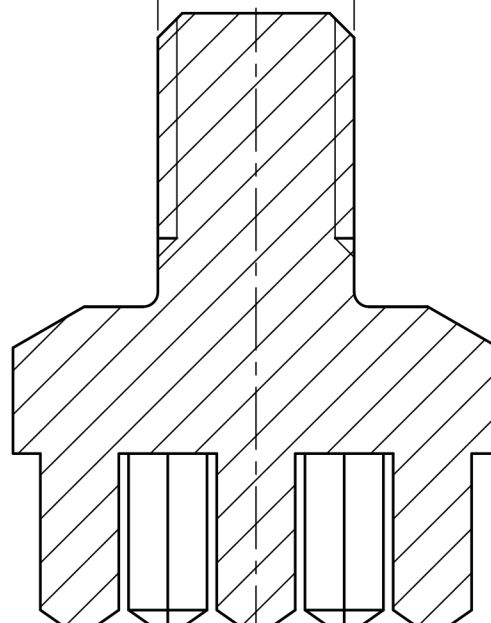

SECTION A-A

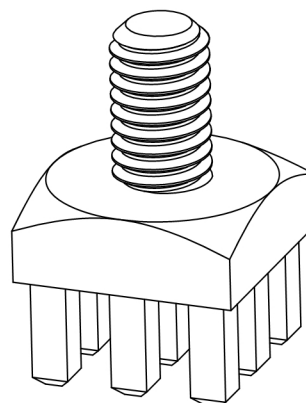

NOTES:

- 1.Material:Brass C3604,comply with RoHS;
- 2.Finish:Tin Plated;
- 3.Packaging:Blister and Carton,
- 4.Free of burrs and sharp edges;
- 5.Thread must be checked with Go/No Go Gauge;
- 6.Unless otherwise specified:±0.12mm and angle ±2°.

In-sail®
力帆精密&山本五金

UNIT: mm

DIM Tol.: Angle Tol.:
X. ± X°. ±
.X ± .X° ±
.XX ± .XX° ±
.XXX ± .XXX° ±

①

1

/

/

See Note 1

See Note 3

/

Part Item

QTY.

Name

Description

Material


Surface Treatment

Remark

DR.

CHKD.

APPD.

Unit net weight
≈ / gRough weight
≈ / g

LEX 2013.10.26

Shenzhen In-sail Precision Parts Co.,Ltd
The Drawing and Specification are the Property of Shenzhen In-sail Precision Parts Co.,Ltd. Without the Prior Written Permission of Top Management, any person or party except the intended ones is prohibited to Copy, Reproduce, Duplicate this document, Please send email to sales@in-sail.com if you have any request.

TITLE:

PE05-M4x12.5-□7.0ET

Drawing#:

LFPE0502B00

P/N:

/

REV.

A

Sheet

1 of 1

1

2

3

4

5

6