



1.6

6	7	8
EC No.	EC Description	DR.
△	/	/

A
B
C
D
E


A
B
C
D
E

Deformed In This Area To Produce Internal Thread Lock (自锁型)

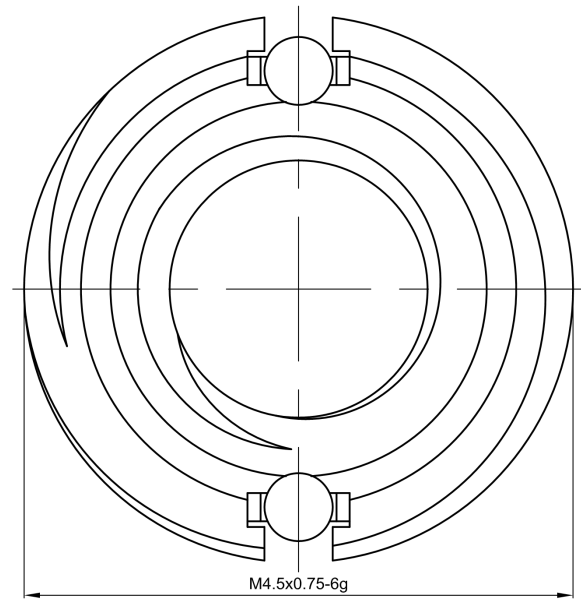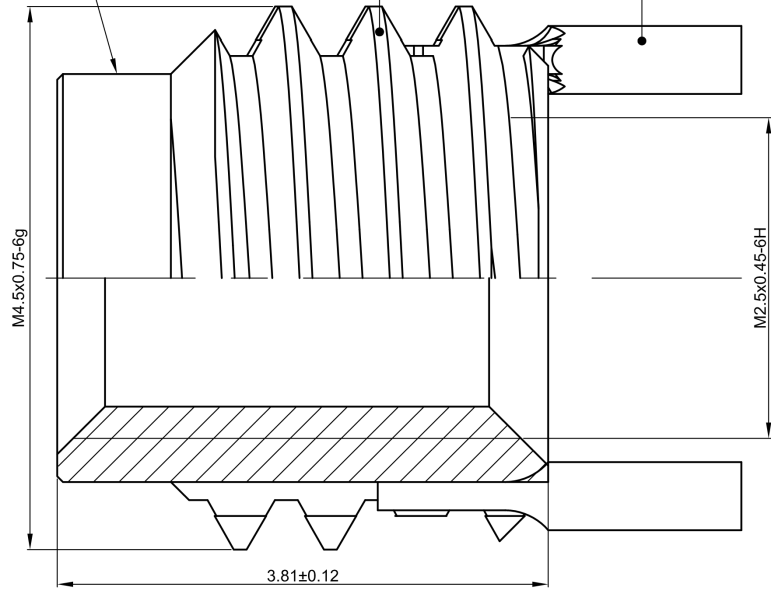

NOTES:

- 1.Material:①Inserts:SUS303;
②Keys:SUS302;
- 2.Heat Treatment:None;
- 3.Surface Treatment:Passivated;
- 4.Packaging:PE bag and Carton;
- 5.Free of burrs and sharp edges;
- 6.Thread must be checked with Go/No Go Gauge;
- 7.Unless otherwise specified:±0.1mm and angle ±2°.



In-sail® 力帆精密&力本五金	①		1		/		/		See Note 1		See Note 3		/		
	Part Item		QTY.		Name		Description		Material		Surface Treatment		Remark		
	DR.		CHKD.		APPD.		Unit net weight ≈ / g				Rough weight ≈ / g				
	JRL 2019.11.12														
UNIT: mm															
DIM Tol.: X. ± .XX ± .XXX ± Angle Tol.: X°. ± .XX° ± .XXX° ±		Shenzhen In-sail. Precision Parts Co.,Ltd The Drawing and Specification are the Property of Shenzhen In-sail. Precision Parts Co.,Ltd. Without the Prior Written Permission of Top Management, any person or party except the intended ones is prohibited to Copy, Reproduce, Duplicate this document, Please send email to sales@in-sail.com if you have any request.						TITLE: L5012-M2.5x3.81-M4.5x0.75SS Drawing#: L501206A P/N: / REV. A Sheet 1 of 1							