



SINOLIFT extra high capacity 5,000kg/11,000lbs, 6,000kg/13,200lbs, and 7,000kg/15,400lbs capacity pallet jacks are the right choice for moving any extra heavy pallet or object, particularly in high usage, mission critical operations where down-time can be very costly. High capacity pallet jacks are the pallet jack of choice for construction sites, military installations, and rental companies.

All SINOLIFT Pallet Jacks are built heavier and more durable than the lower cost import pallet jacks to withstand the demands of continuous daily use. They are designed and built to perform safely and consistently all day every day and are supported by the most professional service and support in the industry. Don't just settle for any pallet jack!



Thickened steel plate
Forks are extraordinarily strong built using 5mm/0.25inch thick, 220mm/9inch wide "C" channel steel. Heavy duty bell cranks and push rods provide added rigidity during the lifting process.



Plunger close-up
Powder coated body and hard chrome plated piston.



Oil pump close-up
Compact appearance, innovative separated rock arm, ensures the whole truck evenly pressed.




Handle close-up
large easy-to-use ergonomic rubber coated handle, which with 3-function control(raise, neutral and lower) to enhance comfort and ease of operation.



Flexible axle sleeve feature
Chromed bearing bushes and joints ensure quiet running properties and particularly long service life.



Fork close-up
Extra solid & robust one - piece "C" section forks for greater strength and durability.



Steering wheel close-up
Extra heavy duty nylon wheels and load rollers so it roll easily over any factory floor, even when loaded to maximum capacity.



Pusher close-up
Solid steel adjustable push rods instead of the standard tubular steel design maintain proper roll-ability of truck.




Handle base feature
Heavy duty additional angle supports on lifting lever frame.



Traction hook
Frame includes integral tow loops.

High capacity pallet jacks are the hand pallet trucks of choice for construction sites, military installations, and rental companies.

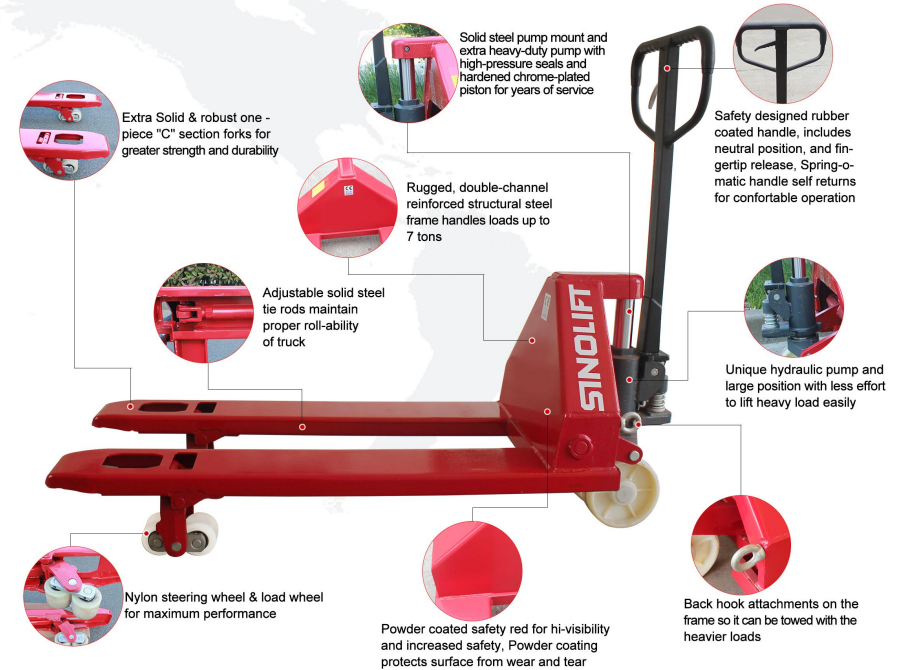

Lower Position
Pull up the fingertip for lowering .


Neutral Position
Keep in the position to push & pull the truck.

Lifting Position
Push down the fingertip for pump lifting .

Heavy Duty Pallet Truck

Product Code NPV50					
Unit of measurement		Metric System		Imperial System	
Capacity *3		kg	5000	lbs	11000
Lowered fork height	H2	mm	85	inch	3.3"
Steering wheel *2	A	mm	Ø180x65	inch	Ø7"x2.6"
Fork wheel tandem	B	mm	Ø78x70	inch	Ø3"x2.75"
Max. lift height	H1	mm	205	inch	8"
Total height	H	mm	1253	inch	49"
Overall length	L2	mm	1544/1614	inch	60"x64"
Fork length *1	L1	mm	1150/1220	inch	45"x48"
Width overall forks *1	W1	mm	540/685	inch	21"x27"
Single fork width	W2	mm	165	inch	6.5"
Ground clearance, centre of wheelbase		mm	24	inch	1"
Aisle width for pallets 1000x1200 crossways		mm	1744/1814	inch	68.5"x71.5"
Aisle width for pallets 800x1200 lengthways		mm	1794/1814	inch	70.5"x71.5"
Turning radius		mm	1300/1370	inch	51"x54"
Service weight		kg	103/122	lbs	226/268

- *1. W1 and L1 with over width and over length can be made according to customer's requirement.
- *2. Ø180x62 / Ø7"x2.6" steering steel wheel is optional.
- *3. The load capacity can be extended to Max. 7 Tons.

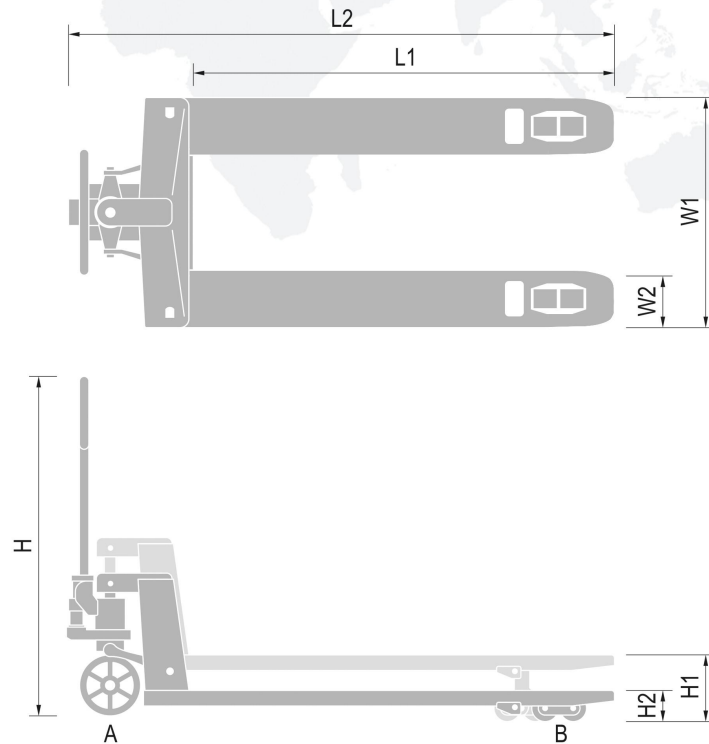

SINOLIFT
For material handling

NPV50
HEAVY DUTY HDYRAULICH HAND PALLET TRUCK
ISO9001
CE



Easy Lift, Easy Life!

Exceptionally strong body for handling with ease

large uneven loads up to 5 tons

- Rubber coated handle
- Fully powder coated body
- Hard chrome plated piston
- Single piece pump with forged body
- Large diameter solid nylon steering wheel and tandem load rollers



SHANGHAI SINOLIFT EQUIPMENT CO., LTD.

Address: 2477 Dachuan Road, Nanhui Industry Park, Pudong New District, Shanghai, 201399, P.R.China

Tel: 0086-21-68014500

Fax: 0086-21-68014261

Website: www.sinolift.com www.sinoliftchina.com

Email: export@sinolift.com

Skype: [yh@sinolift.com](https://www.skype.com/people/yh@sinolift.com)

Whatapp: +0086 13917078584

