

## Features

Unit Size: 46\*39\*32 mm

Plunger:  $\phi$  11.5 mm

Voltage: DC 24 V or 36V

Stroke: 20--30mm

Force: 1000 --1200 GF


Power: 20-25 W

Current: 2 A

Resistance: 50----70  $\Omega$

Lifespan:  $\geq$  300,000 Cycles

Working Cycle: 1 s On, 9 s Off

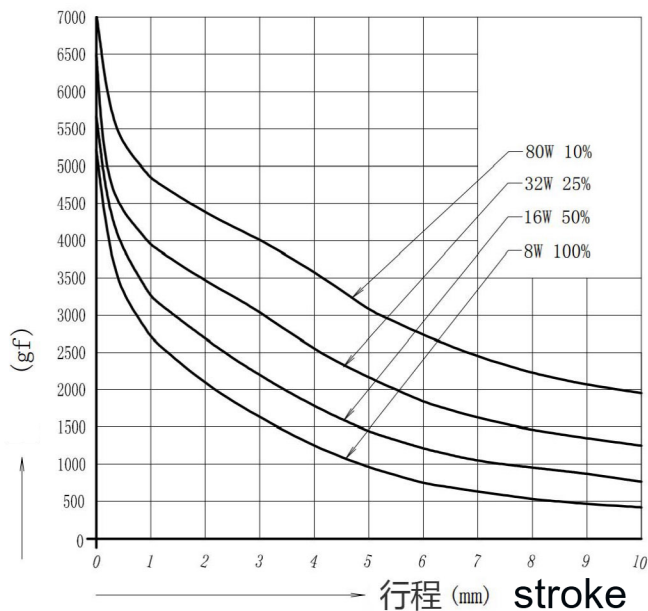

Duty cycle = time off / (time on +time off) x 100	100%	50%	25%	10%
	Full Power on	Intermittent Power On		
Power on time	$\infty$	140	50	9
wattage	8	16	32	80
Model No.(Resistant )	(电压 DC) 电阻 ( $\Omega \pm 10\% 20^\circ\text{C}$ )			
SDO-1264S-06A**	(6V) 4.5	(6V) 2.25	(6V) 1.13	--
SDO-1264S-12A**	(12V) 18	(12V) 9	(12V) 4.5	(12V) 1.8
SDO-1264S-24A**	(24V) 72	(24V) 36	(24V) 18	(24V) 7.2
SDO-1264S-48A**	(48V) 288	(48V) 144	(48V) 72	(48V) 28.8

Dongguan Asite Technology Co., Ltd.

Add.: 3 Floor, Building NO. 2, Hongyang Industrial Park, No.1 Mianbianwang Road, Shipai Town, Dongguan City, Guangdon Province, P.R.C.

www.drsoleoid.com E-mail:: info@drsoleoid.com