
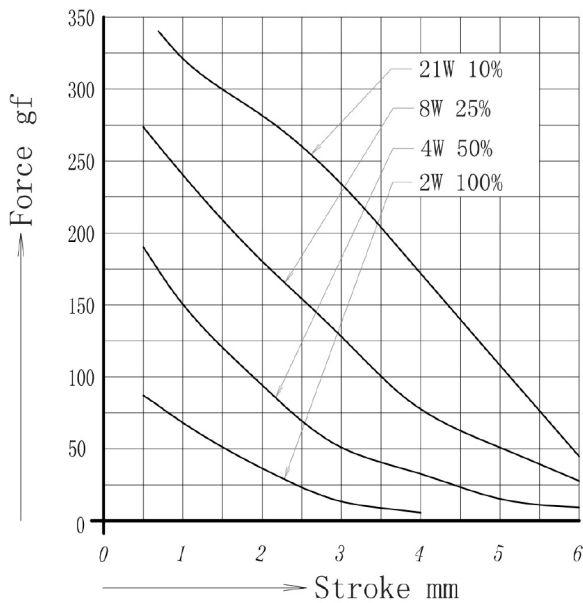
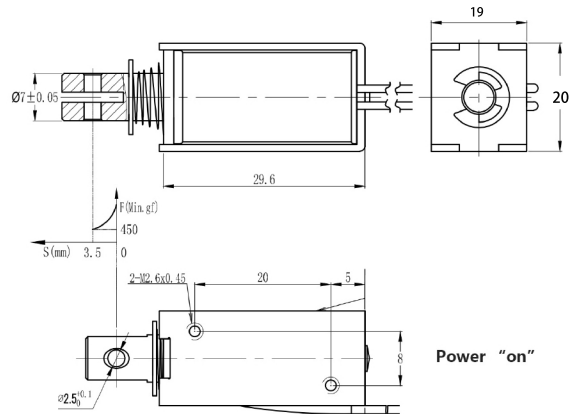


Linear Open Frame Solenoid AS 0730

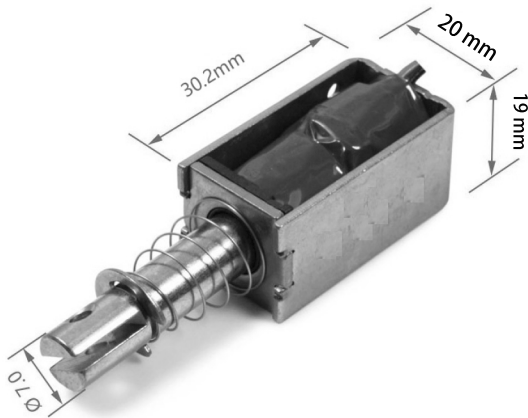

- Frame Size: 30 * 20* 19 MM
- Plunger: ϕ 7.0
- Power : DC 12 V or 24 V
- Voltage: 28 W
- Current: 2 A
- Stroke: 0-6mm
- Force: 2-5 N
- Move Type: Pull
- Life Expectancy: >100 Kcycles

duty cycle=100% x $\frac{\text{"on" time}}{\text{"on" time} + \text{"off"}}$	100%	50%	25%	10%
	continuous	intermittent		
Max. "on" time in seconds	∞	30	10	2
watts at 20°C	2	4	8	21
type no. (** : resistance)	(volts DC) resistance $\Omega \pm 10\%$ at 20°C			
SDO-0730L-06A**	(6V) 18	(6V) 9	(6V) 4.5	(6V) 1.7
SDO-0730L-12A**	(12V) 72	(12V) 36	(12V) 18	(12V) 6.8
SDO-0730L-24A**	(24V) 288	(24V) 144	(24V) 72	(24V) 27.4
SDO-0730L-48A**	--	--	(48V) 288	(48V) 109.7