

G06

Electric Heated Towel Warmer



Model shown: G06-M-CHR-XM



Product Specification

This drawing is for design reference only. For specific drilling/hole positions, please refer to the actual product.	Products and specifications are subject to change without notice. Please contact customer service for Full Size Product Template.	Finish/Color
		Please refer to the PRICE CATALOG for all finishes/colors/control options.



G06-M


Tolerance on dimensions: ±0.2"/±5mm

MODEL	A	B	C
G06-M	26.2" 665mm	20.7" 525mm	7.8" 200mm

Model	G06-M
Package dimensions /in/mm	28.0x26.7x4.7"/712x679x120mm
Power /W	50
Net weight /kg	6.61lb/3kg

Mounting & Hole Layout

This drawing is for design reference only. For specific drilling/hole positions, please refer to the actual product.	Products and specifications are subject to change without notice. Please contact customer service for Full Size Product Template.	Finish/Color
		Please refer to the PRICE CATALOG for all finishes/colors/control options.

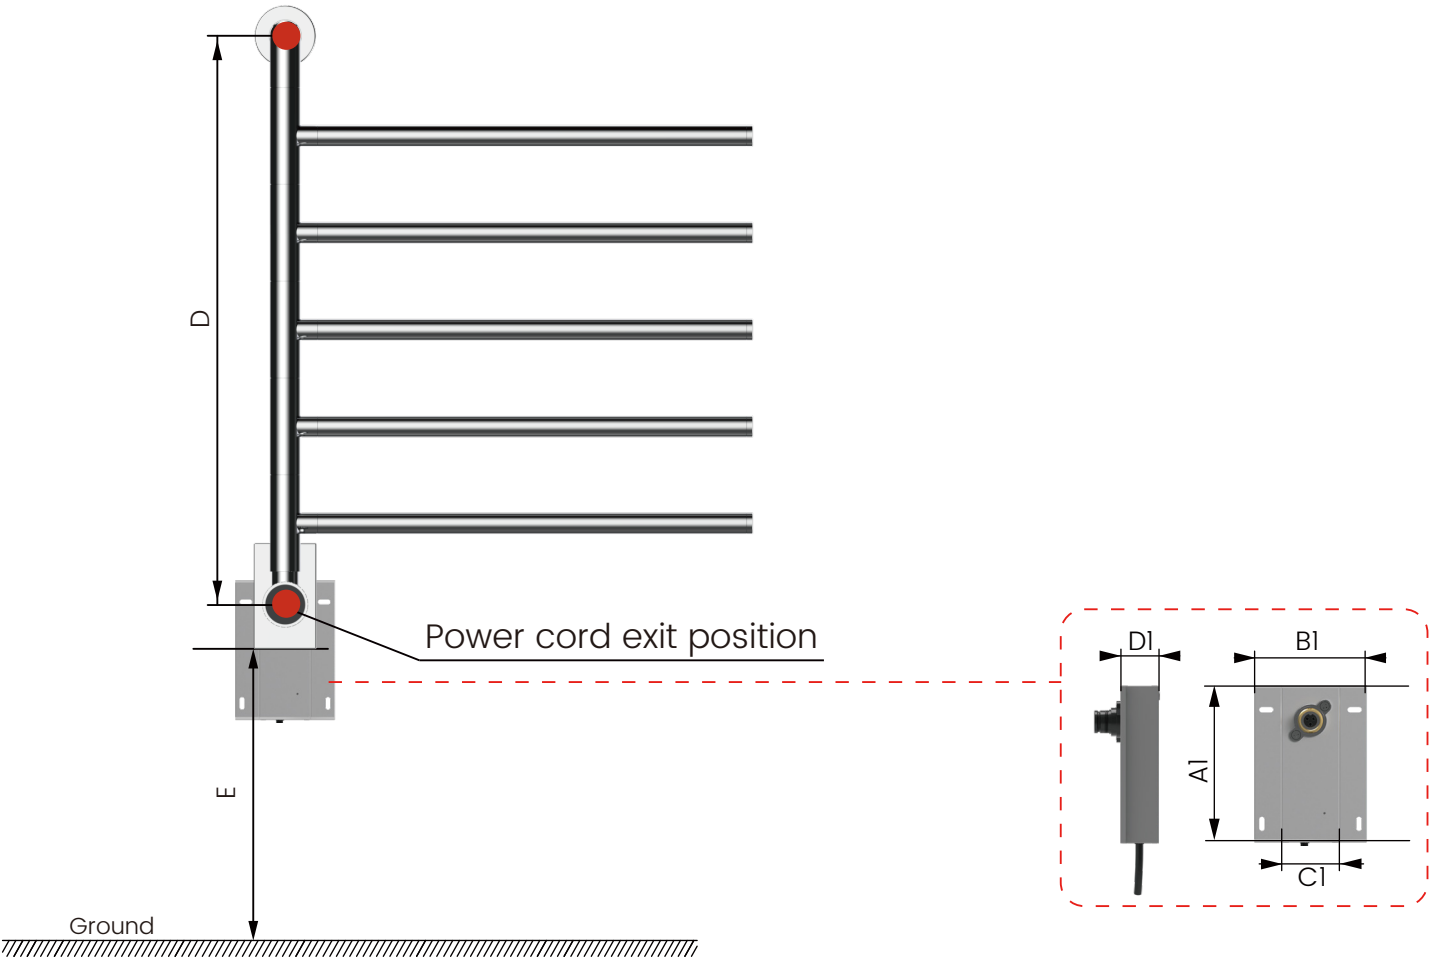

NOTE

The Rough Body Fixed Block Box Must Be Installed Flush With the Exterior Edge Of The Wood Studs/Cross Beams To Ensure Proper Rough-In Dimension.

Stud Wall Installation

NOTE


The thickness of the finished wall application (including drywall, and tile, stone, etc..) should not be less than 0.5in/15mm and should not exceed 1.5in/40mm.

The diagram shows the unit being installed into a wooden stud wall. The unit is shown in profile, with its rough-in depth indicated by a red dashed line. The wall thickness is shown with two scenarios: a minimum of 0.5in/15mm and a maximum of 1.5in/40mm.

Tolerance on dimensions: ±0.2"/±5mm

MODEL	D	E	A1	B1	C1	D1
G06-M	23.1" 587mm	43.3" 1100mm	5.7" 145mm	4.1" 103mm	2.3" 58mm	1.4" 35mm

Electrical Diagram For Integrated Control

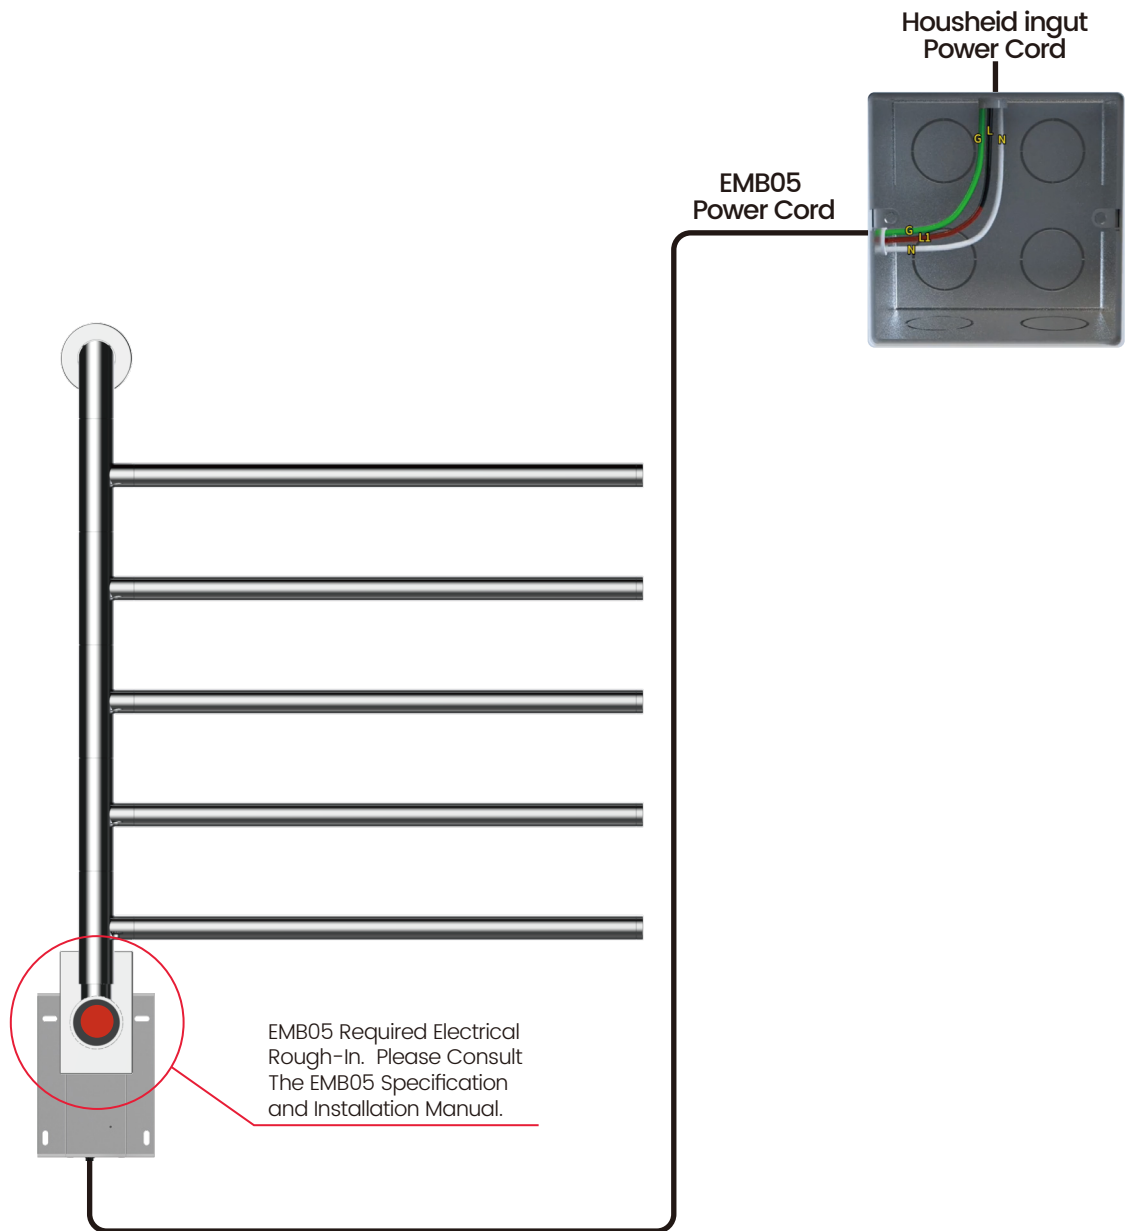

Please specify required power cord length (-2, -15, -10, -15 meter) for EMB05 required electrical rough in at time of order. The power cable will connect to the household incoming electrical at the junction box.