

K05

Electric Heated Towel Warmer




Model shown: G12-L-CHR-ME



Product Specification

This drawing is for design reference only. For specific drilling/hole positions, please refer to the actual product.	Products and specifications are subject to change without notice. Please contact customer service for Full Size Product Template.	Finish/Color
		Please refer to the PRICE CATALOG for all finishes/colors/control options.

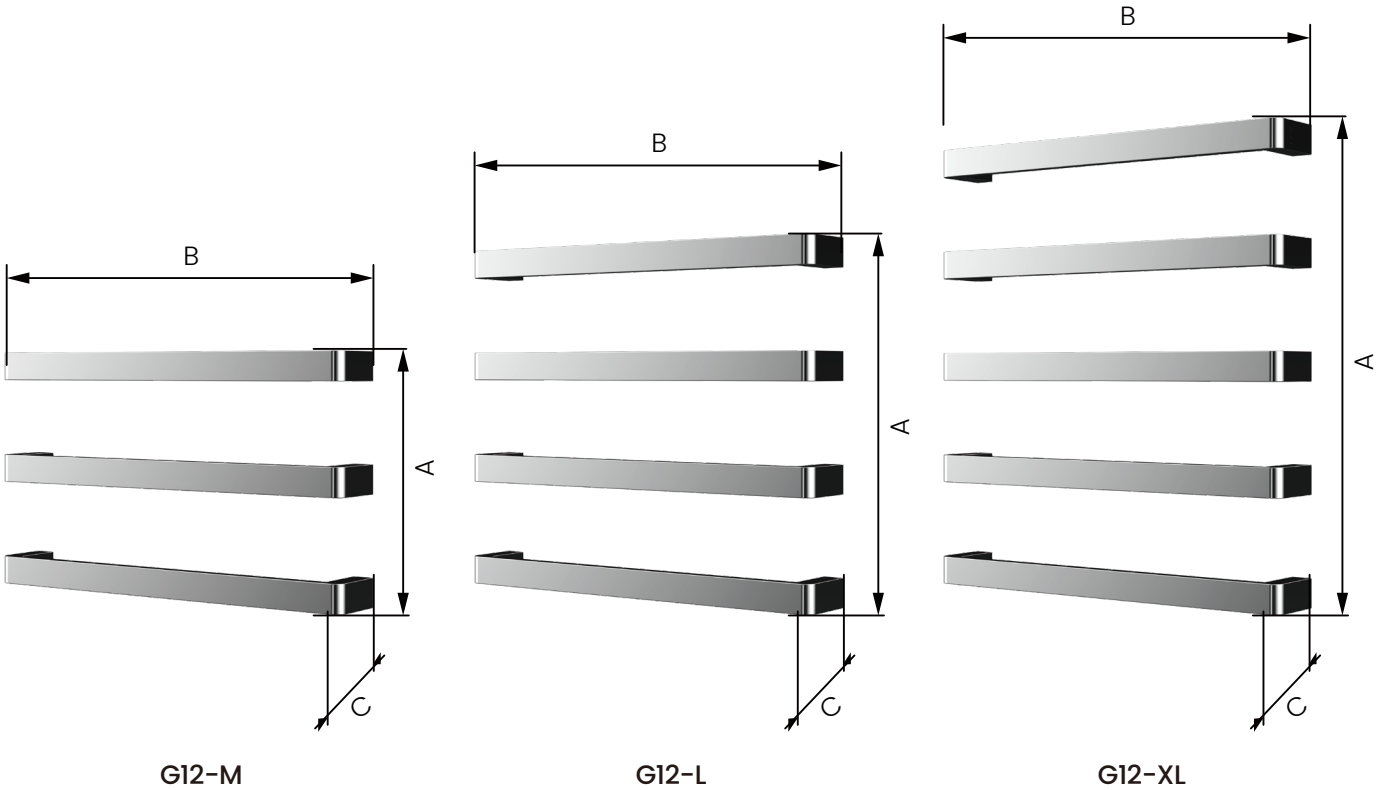


Tolerance on dimensions: $\pm 0.2"$ / $\pm 5\text{mm}$

MODEL	A	B	C
G12-M	13.4" 340mm	22.8" 580mm	3.3" 85mm
G12-L	19.4" 490mm	22.8" 580mm	3.3" 85mm
G12-XL	25.2" 640mm	22.8" 580mm	3.3" 85mm


Model	G26-M	G26-L	G26-XL
Package dimensions / in/mm	29.2x14.6x4.9"/742x370x124mm	29.2x16.0x4.9"/742x407x124mm	29.2x21.4x4.9"/742x543x124mm
Power/W	36	48	60

Mounting & Hole Layout

This drawing is for design reference only. For specific drilling/hole positions, please refer to the actual product.	Products and specifications are subject to change without notice. Please contact customer service for Full Size Product Template.	Finish/Color
		Please refer to the PRICE CATALOG for all finishes/colors/control options.

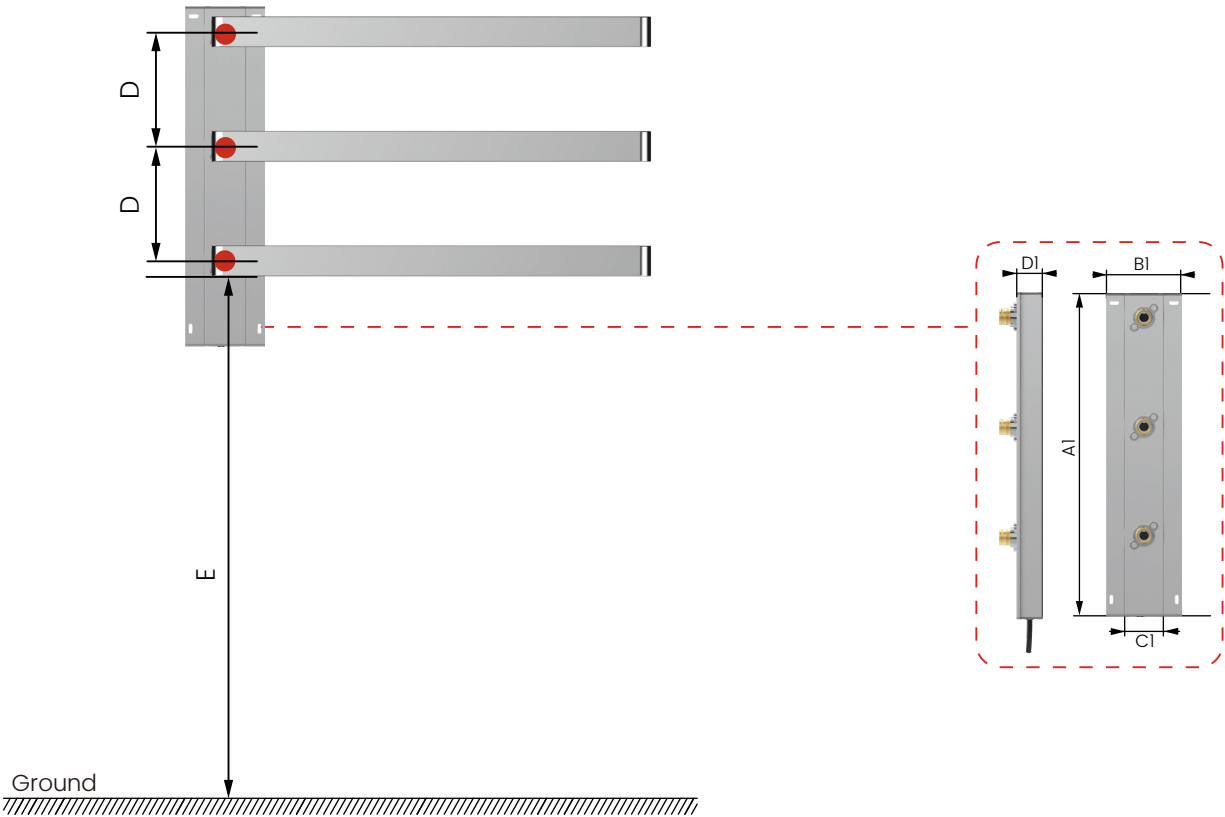


G12-M



NOTE
The Rough Body Fixed Block Box Must Be Installed Flush With the Exterior Edge Of The Wood Studs/Cross Beams To Ensure Proper Rough-In Dimension.

Stud Wall Installation

NOTE The thickness of the finished wall application (including drywall, and tile, stone, etc..) should not be less than 0.5in/15mm and should not exceed 1.5in/40mm.




Tolerance on dimensions: ±0.2"/±5mm

MODEL	D	E	A1	B1	C1	D1
G12-M	5.9" 150mm	49.2" 1250mm	17.5" 445mm	4.1" 103mm	2.3" 58mm	1.4" 35mm

Mounting & Hole Layout

This drawing is for design reference only. For specific drilling/hole positions, please refer to the actual product.	Products and specifications are subject to change without notice. Please contact customer service for Full Size Product Template.	Finish/Color
		Please refer to the PRICE CATALOG for all finishes/colors/control options.

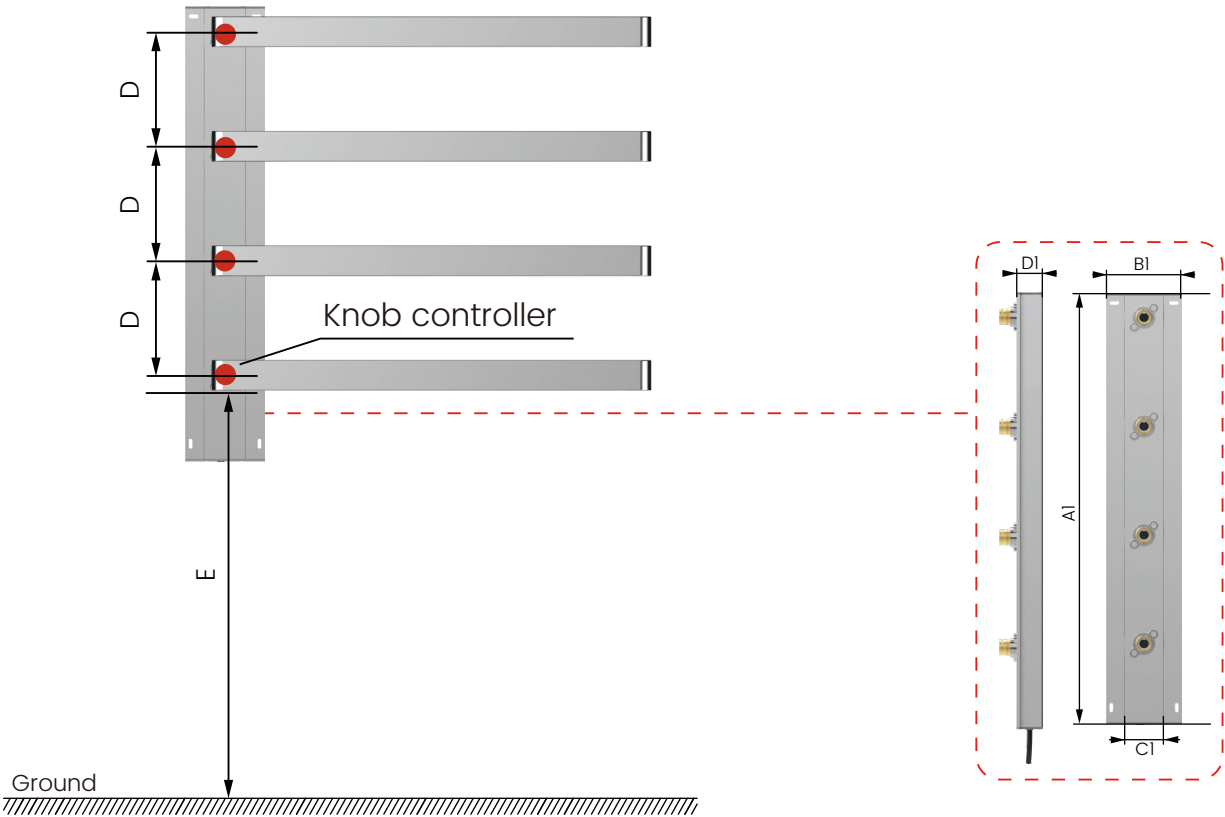

G12-L

NOTE
The Rough Body Fixed Block Box Must Be Installed Flush With the Exterior Edge Of The Wood Studs/Cross Beams To Ensure Proper Rough-In Dimension.

Stud Wall Installation


NOTE The thickness of the finished wall application (including drywall, and tile, stone, etc..) should not be less than 0.5in/15mm and should not exceed 1.5in/40mm.

Tolerance on dimensions: ±0.2"/±5mm


MODEL	D	E	A1	B1	C1	D1
G12-L	5.9" 150mm	43.3" 1100mm	23.4" 595mm	4.1" 103mm	2.3" 58mm	1.4" 35mm

Mounting & Hole Layout

This drawing is for design reference only. For specific drilling/hole positions, please refer to the actual product.	Products and specifications are subject to change without notice. Please contact customer service for Full Size Product Template.	Finish/Color
		Please refer to the PRICE CATALOG for all finishes/colors/control options.

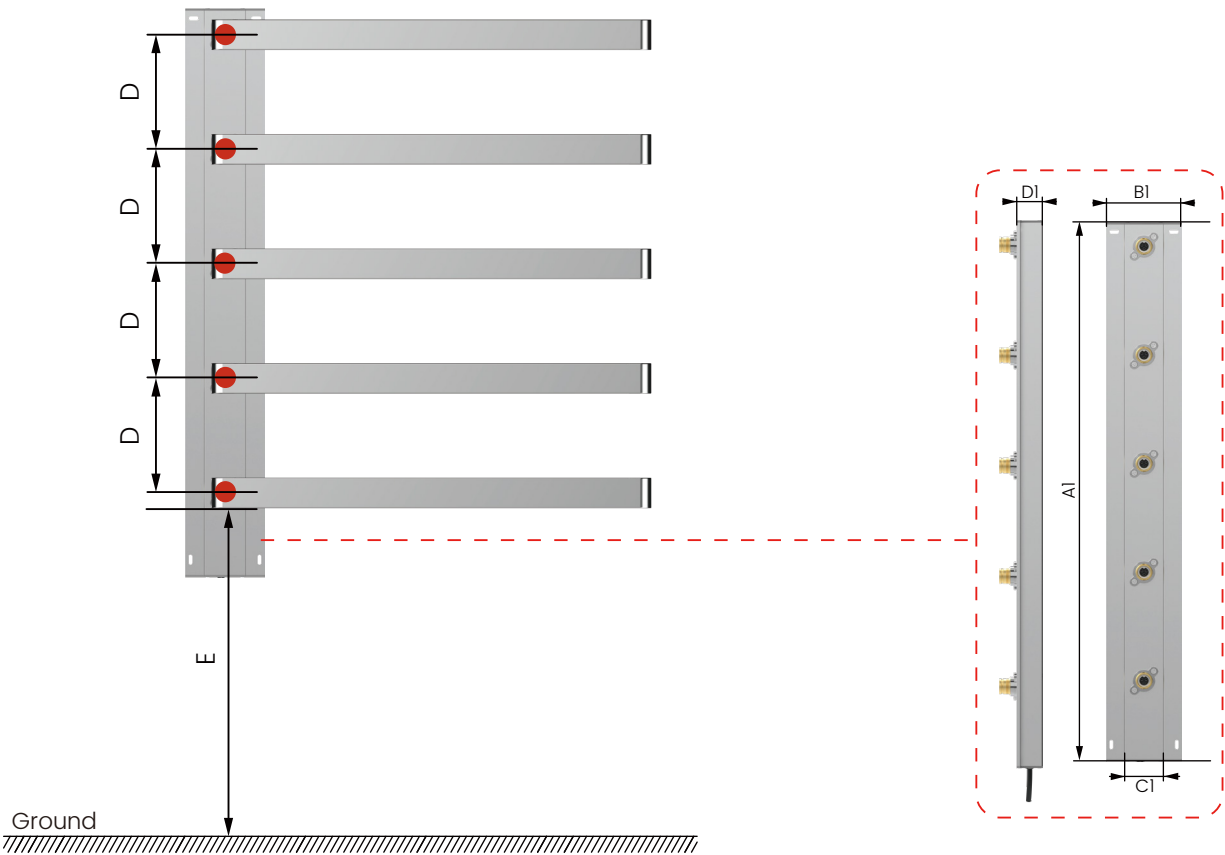


G12-XL



NOTE
The Rough Body Fixed Block Box Must Be Installed Flush With the Exterior Edge Of The Wood Studs/Cross Beams To Ensure Proper Rough-In Dimension.

Stud Wall Installation

NOTE The thickness of the finished wall application (including drywall, and tile, stone, etc..) should not be less than 0.5in/15mm and should not exceed 1.5in/40mm.




Tolerance on dimensions: ±0.2"/±5mm

MODEL	D	E	A1	B1	C1	D1
G12-XL	5.9" 150mm	37.4" 950mm	29.3" 745mm	4.1" 103mm	2.3" 58mm	1.4" 35mm


Electrical Diagram

For Integrated Control

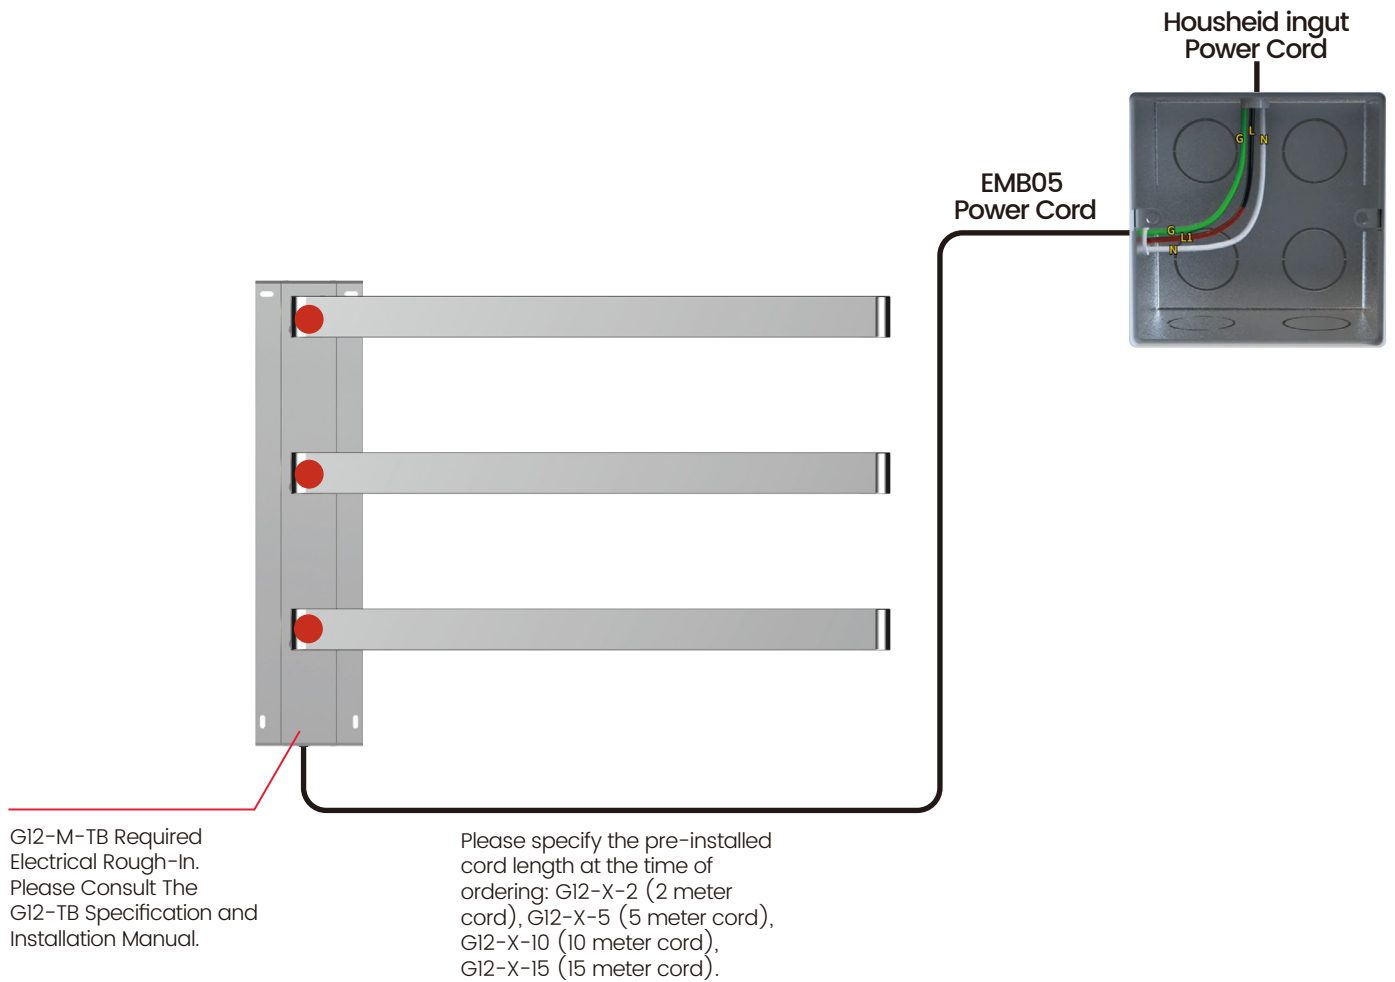

Electrical Diagram

For Integrated Control

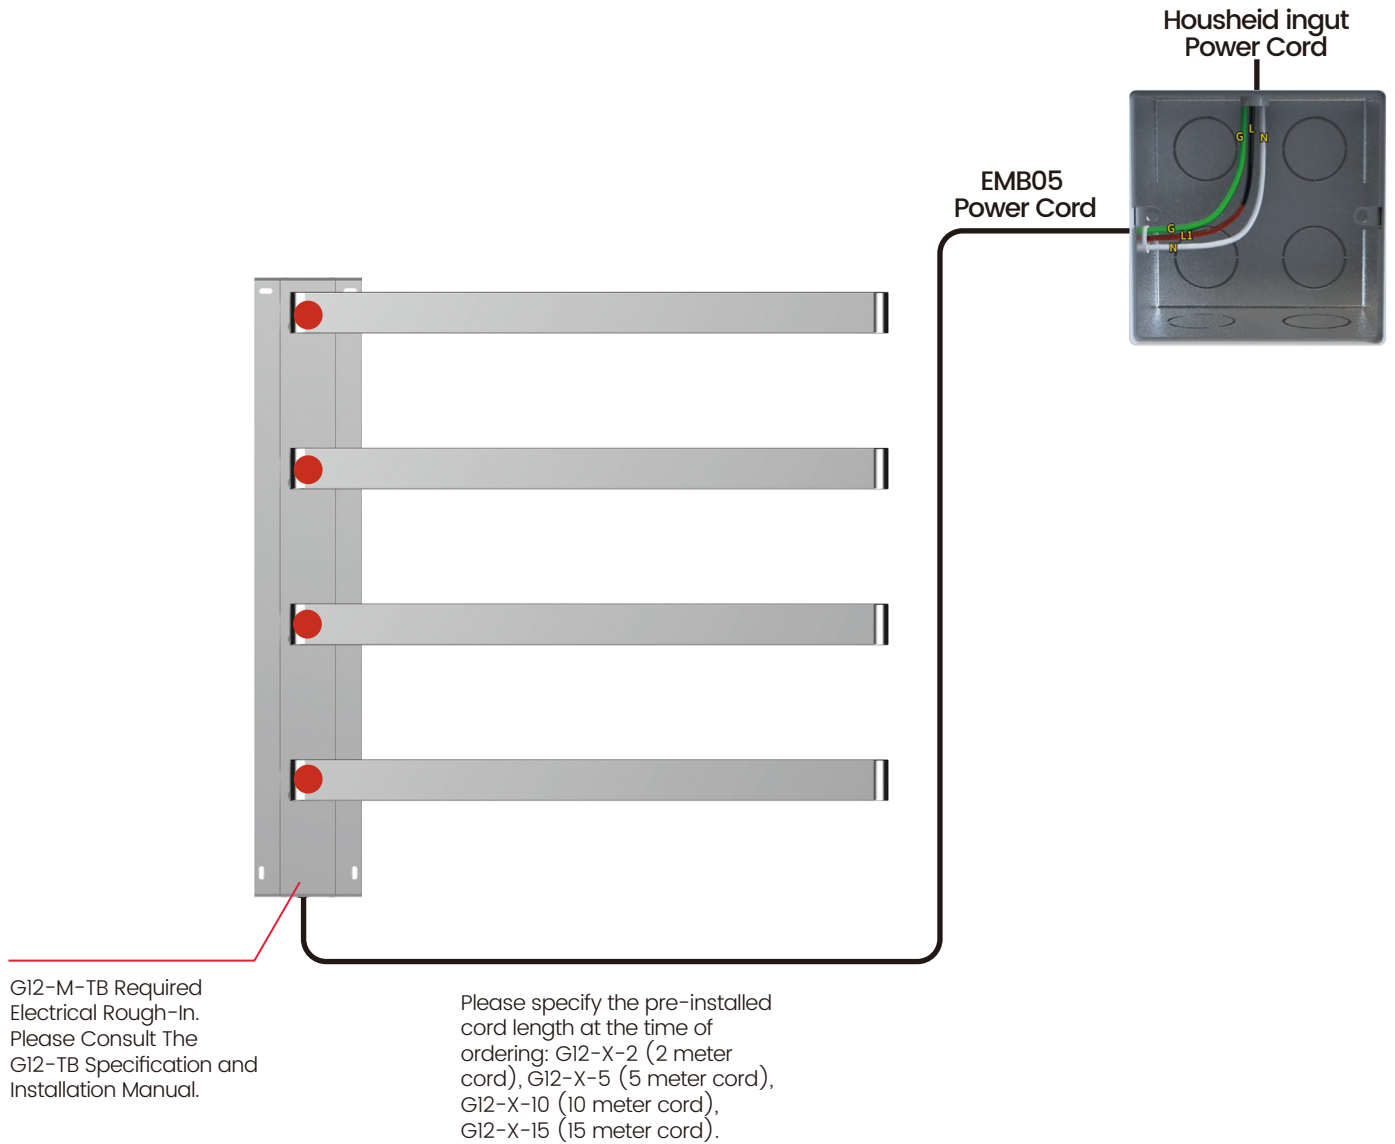

Electrical Diagram

For Integrated Control

