

K015

Electric Heated Towel Warmer




Model shown: K015-L-PWH-N




Product Specification


This drawing is for design reference only. For specific drilling/hole positions, please refer to the actual product.	Products and specifications are subject to change without notice. Please contact customer service for Full Size Product Template.	Finish/Color
		Please refer to the PRICE CATALOG for all finishes/colors/control options.

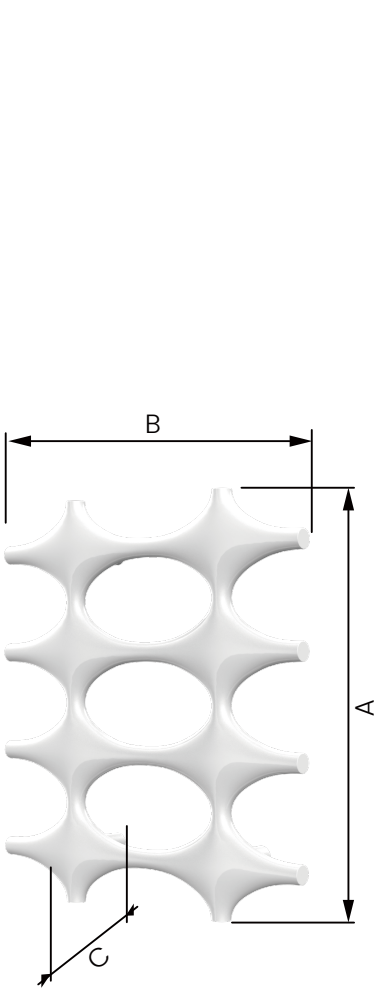

K015-S

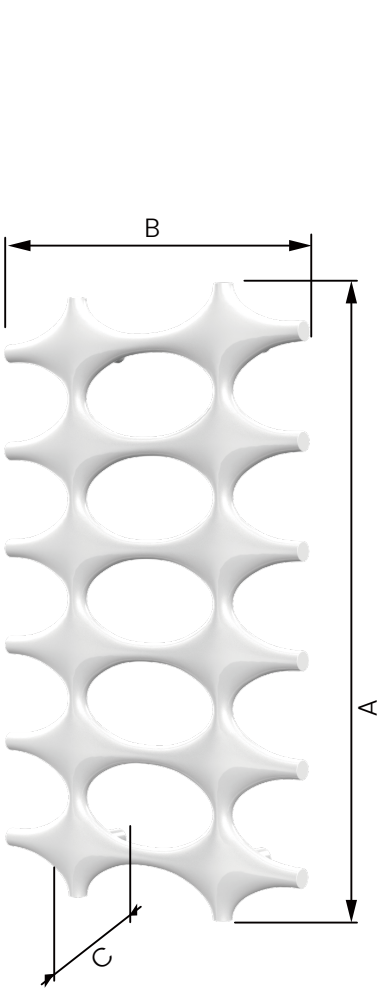

K015-M

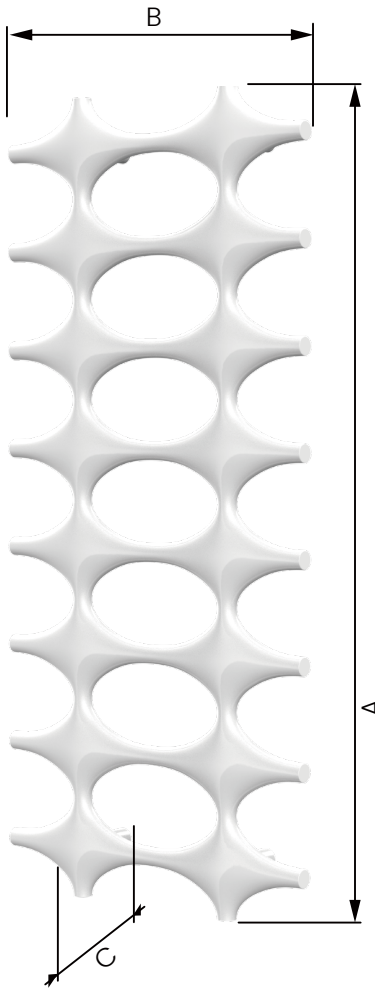

K015-L


Tolerance on dimensions: ±0.2"/±5mm

MODEL	A	B	C
K015-S	21.3" 510mm	19.7" 500mm	4.1" 105mm
K102-M	31.9" 810mm	19.7" 500mm	4.1" 105mm
K102-L	42.5" 1080mm	19.7" 500mm	4.1" 105mm

Model	K015-S	K015-M	K015-L
Package dimensions /in/mm	28x22.8x7.3"/710x580x186mm	38.3x22.8x7.3"/973x580x186mm	48.8x22.8x7.3"/1240x580x186mm
Power/W	95	132	76
Net weight /kg	13.82lb/6.27kg	17.31lb/7.85kg	22.95lb/10.41kg

Mounting & Hole Layout

This drawing is for design reference only. For specific drilling/hole positions, please refer to the actual product.	Products and specifications are subject to change without notice. Please contact customer service for Full Size Product Template.	Finish/Color
		Please refer to the PRICE CATALOG for all finishes/colors/control options.

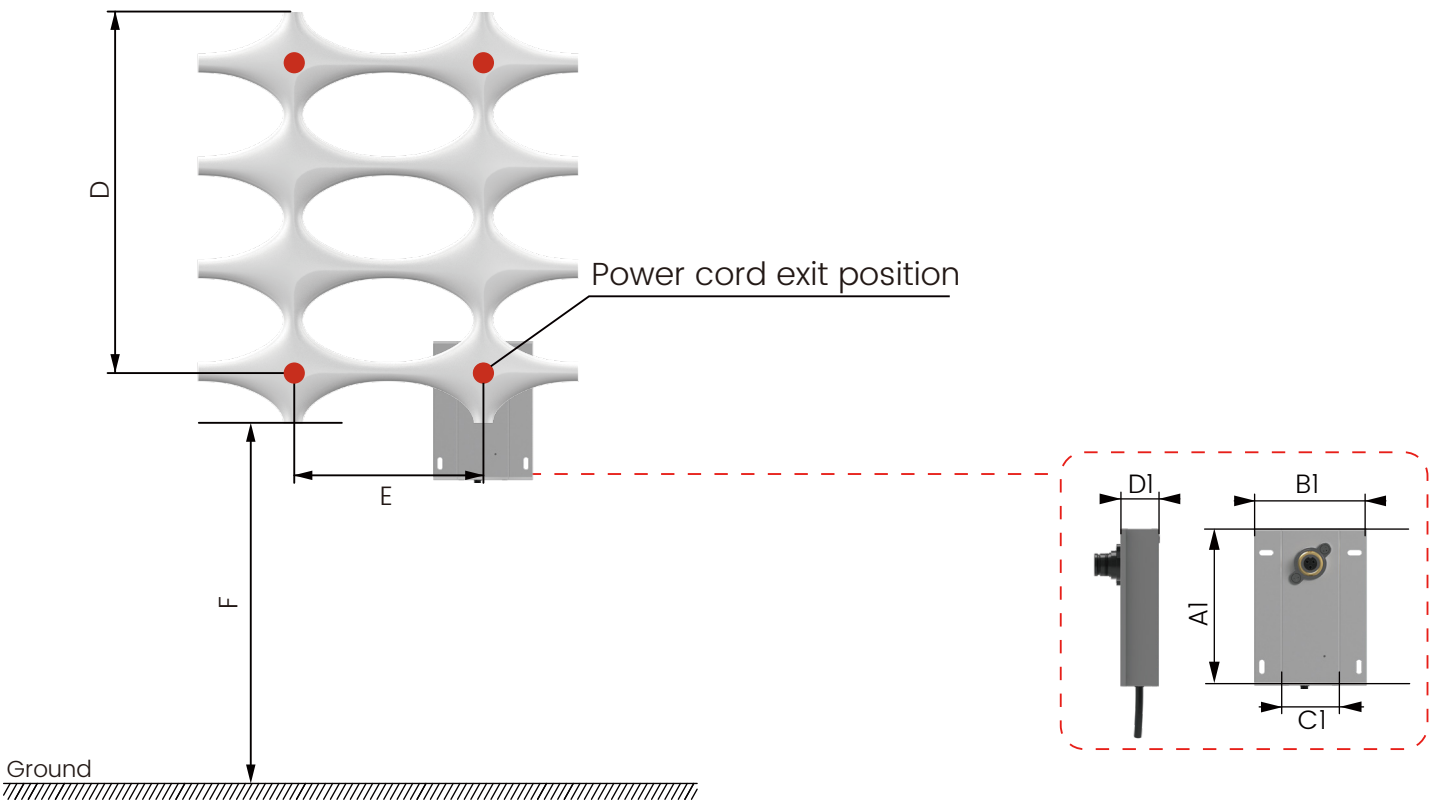

NOTE
The Rough Body Fixed Block Box Must Be Installed Flush With the Exterior Edge Of The Wood Studs/Cross Beams To Ensure Proper Rough-In Dimension.

Stud Wall Installation


NOTE
The thickness of the finished wall application (including drywall, and tile, stone, etc..) should not be less than 0.5in/15mm and should not exceed 1.5in/40mm.

Tolerance on dimensions: ±0.2"/±5mm

MODEL	D	E	F	A1	B1	C1	D1
K015-S	16" 405mm	9.8" 250mm	47" 1200mm	5.7" 145mm	4.1" 103mm	2.3" 58mm	1.4" 35mm

Mounting & Hole Layout

This drawing is for design reference only. For specific drilling/hole positions, please refer to the actual product.	Products and specifications are subject to change without notice. Please contact customer service for Full Size Product Template.	Finish/Color
		Please refer to the PRICE CATALOG for all finishes/colors/control options.

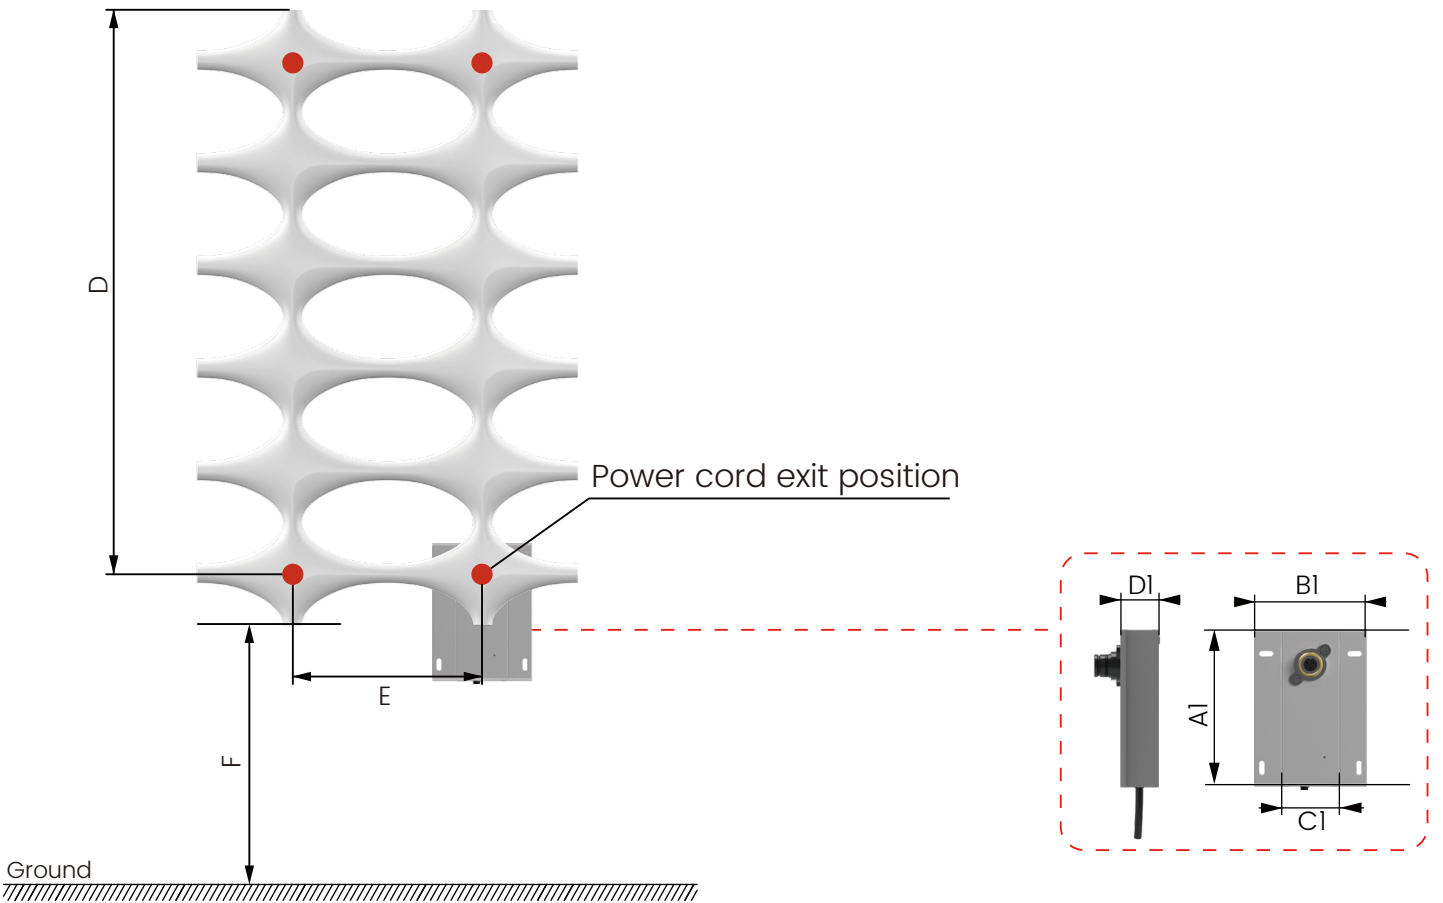

NOTE

The Rough Body Fixed Block Box Must Be Installed Flush With the Exterior Edge Of The Wood Studs/Cross Beams To Ensure Proper Rough-In Dimension.

Stud Wall Installation


NOTE The thickness of the finished wall application (including drywall, and tile, stone, etc..) should not be less than 0.5in/15mm and should not exceed 1.5in/40mm.

Tolerance on dimensions: ±0.2"/±5mm

MODEL	D	E	F	A1	B1	C1	D1
K015-M	26.6" 675mm	9.8" 250mm	39" 990mm	5.7" 145mm	4.1" 103mm	2.3" 58mm	1.4" 35mm

Mounting & Hole Layout

This drawing is for design reference only. For specific drilling/hole positions, please refer to the actual product.	Products and specifications are subject to change without notice. Please contact customer service for Full Size Product Template.	Finish/Color
		Please refer to the PRICE CATALOG for all finishes/colors/control options.

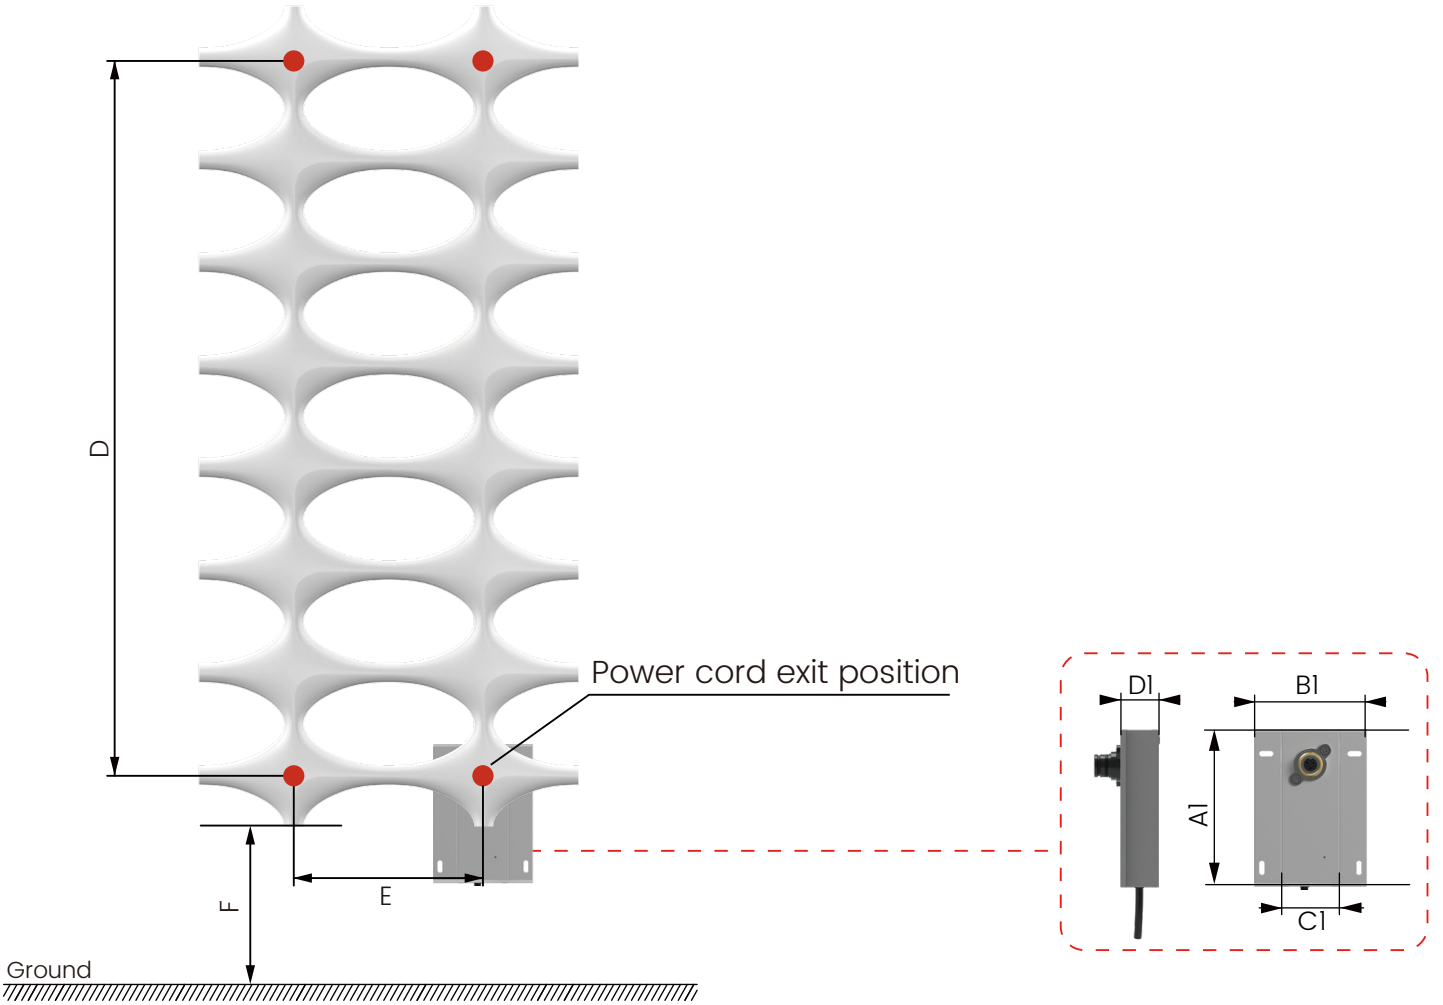

NOTE

The Rough Body Fixed Block Box Must Be Installed Flush With the Exterior Edge Of The Wood Studs/Cross Beams To Ensure Proper Rough-In Dimension.

Stud Wall Installation

NOTE


The thickness of the finished wall application (including drywall, and tile, stone, etc..) should not be less than 0.5in/15mm and should not exceed 1.5in/40mm.

Tolerance on dimensions: ±0.2"/±5mm

MODEL	D	E	F	A1	B1	C1	D1
K015-L	37.2" 405mm	9.8" 250mm	27.6" 700mm	5.7" 145mm	4.1" 103mm	2.3" 58mm	1.4" 35mm


Electrical Diagram

For Integrated Control

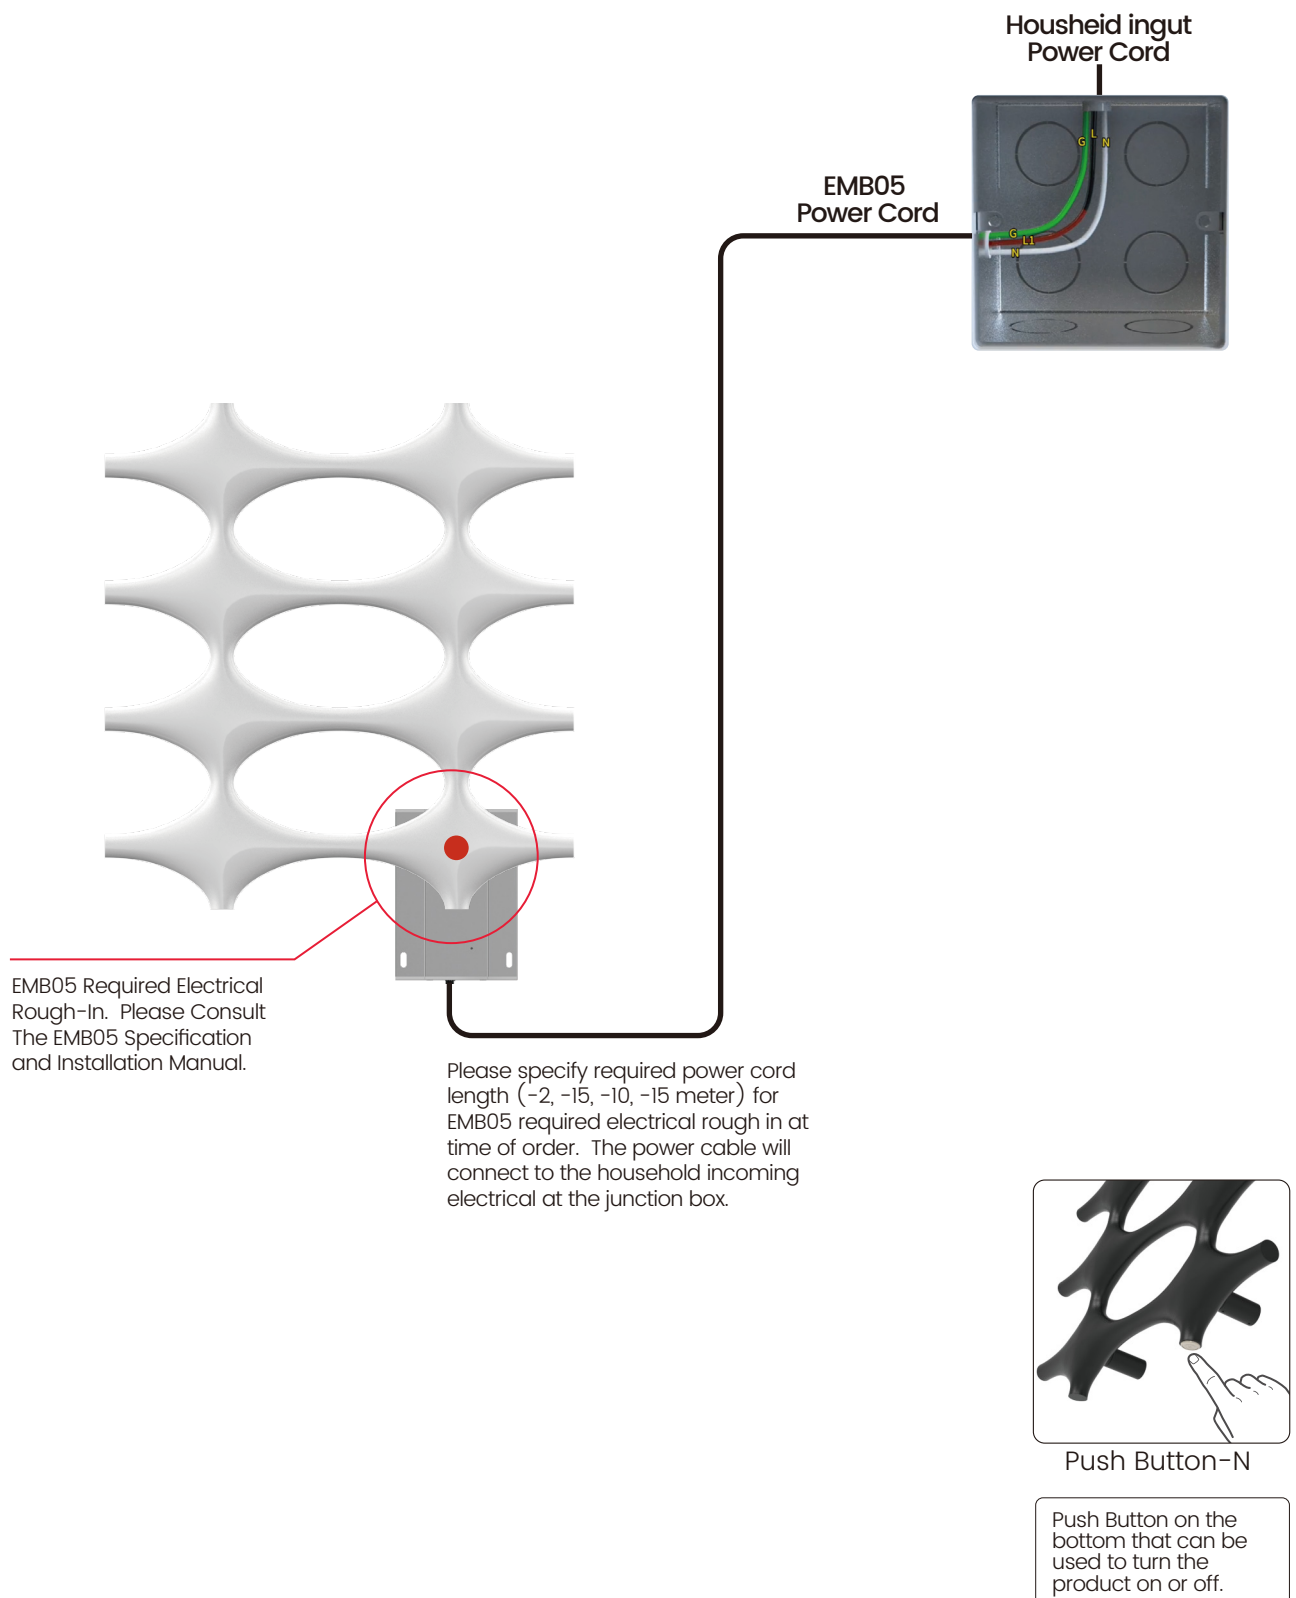


Electrical Diagram

For Integrated Control

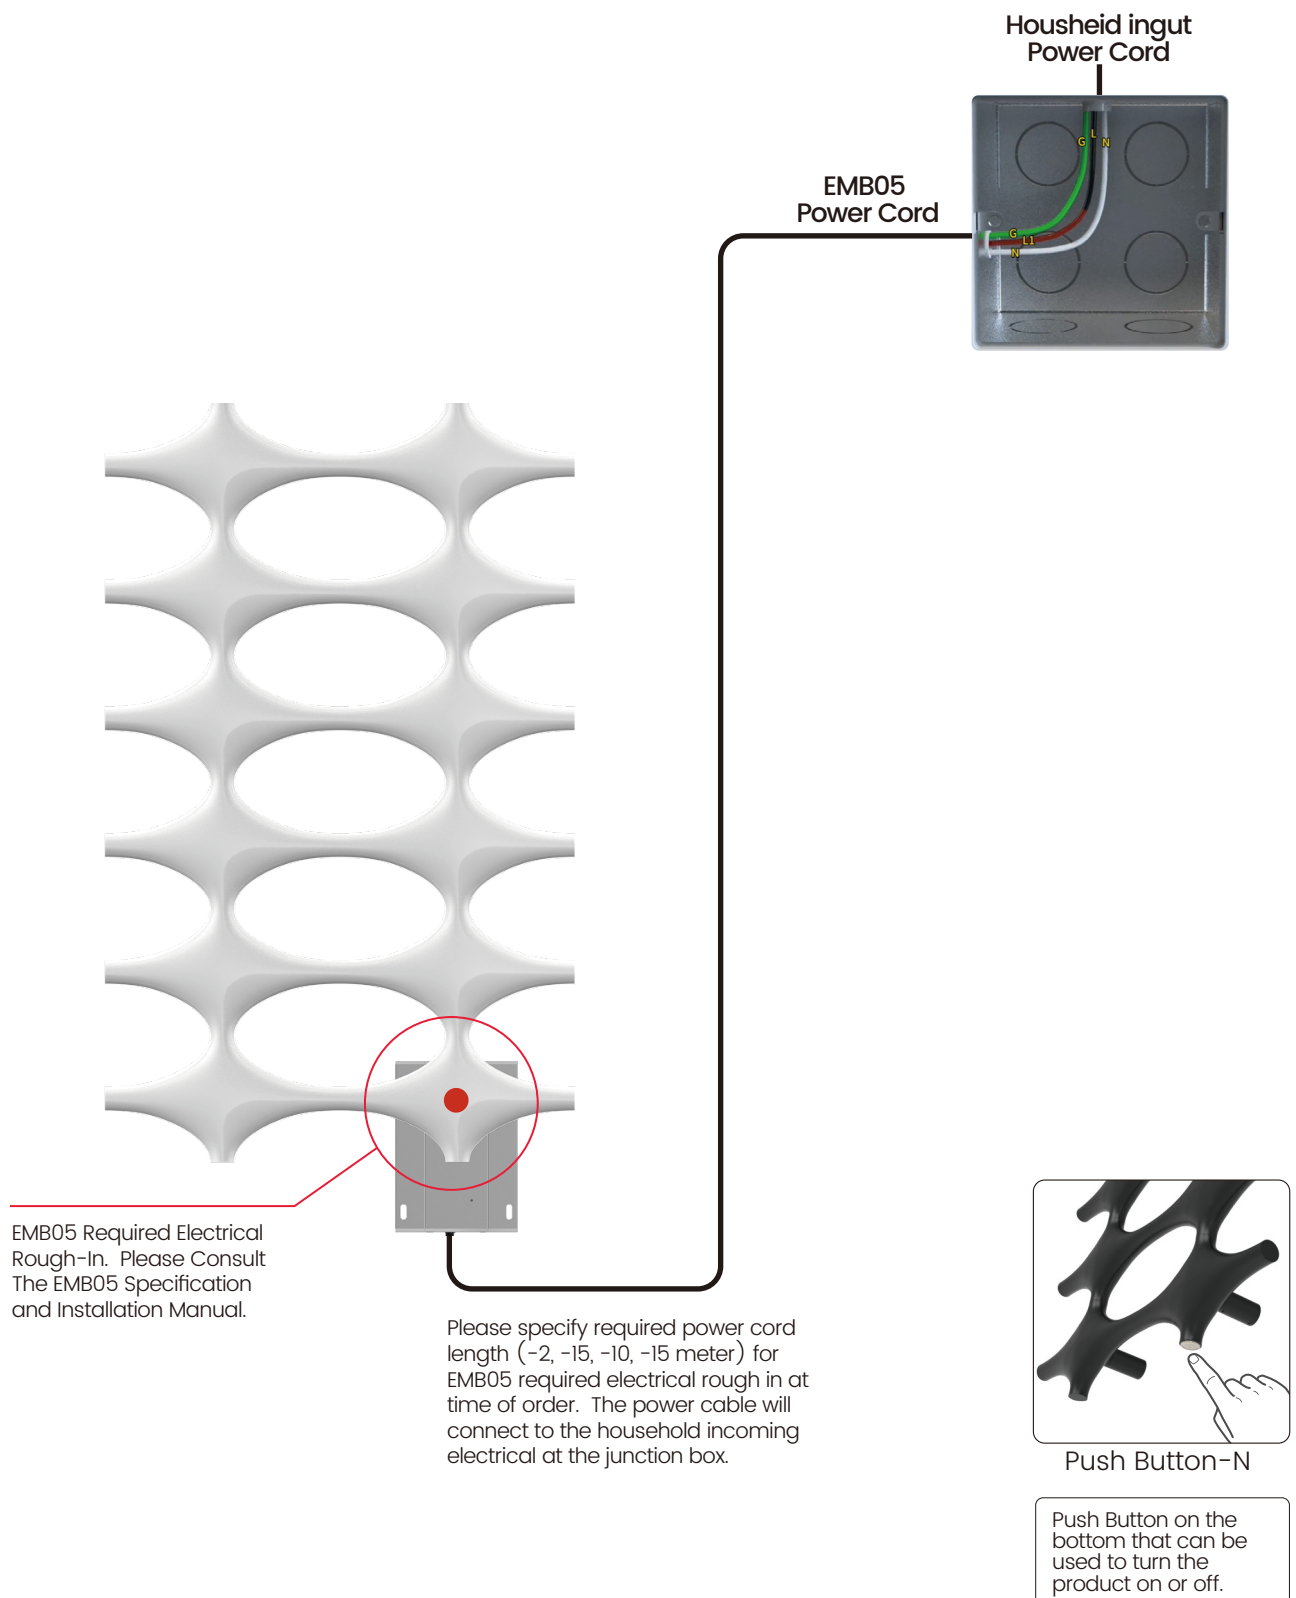


Electrical Diagram For Integrated Control

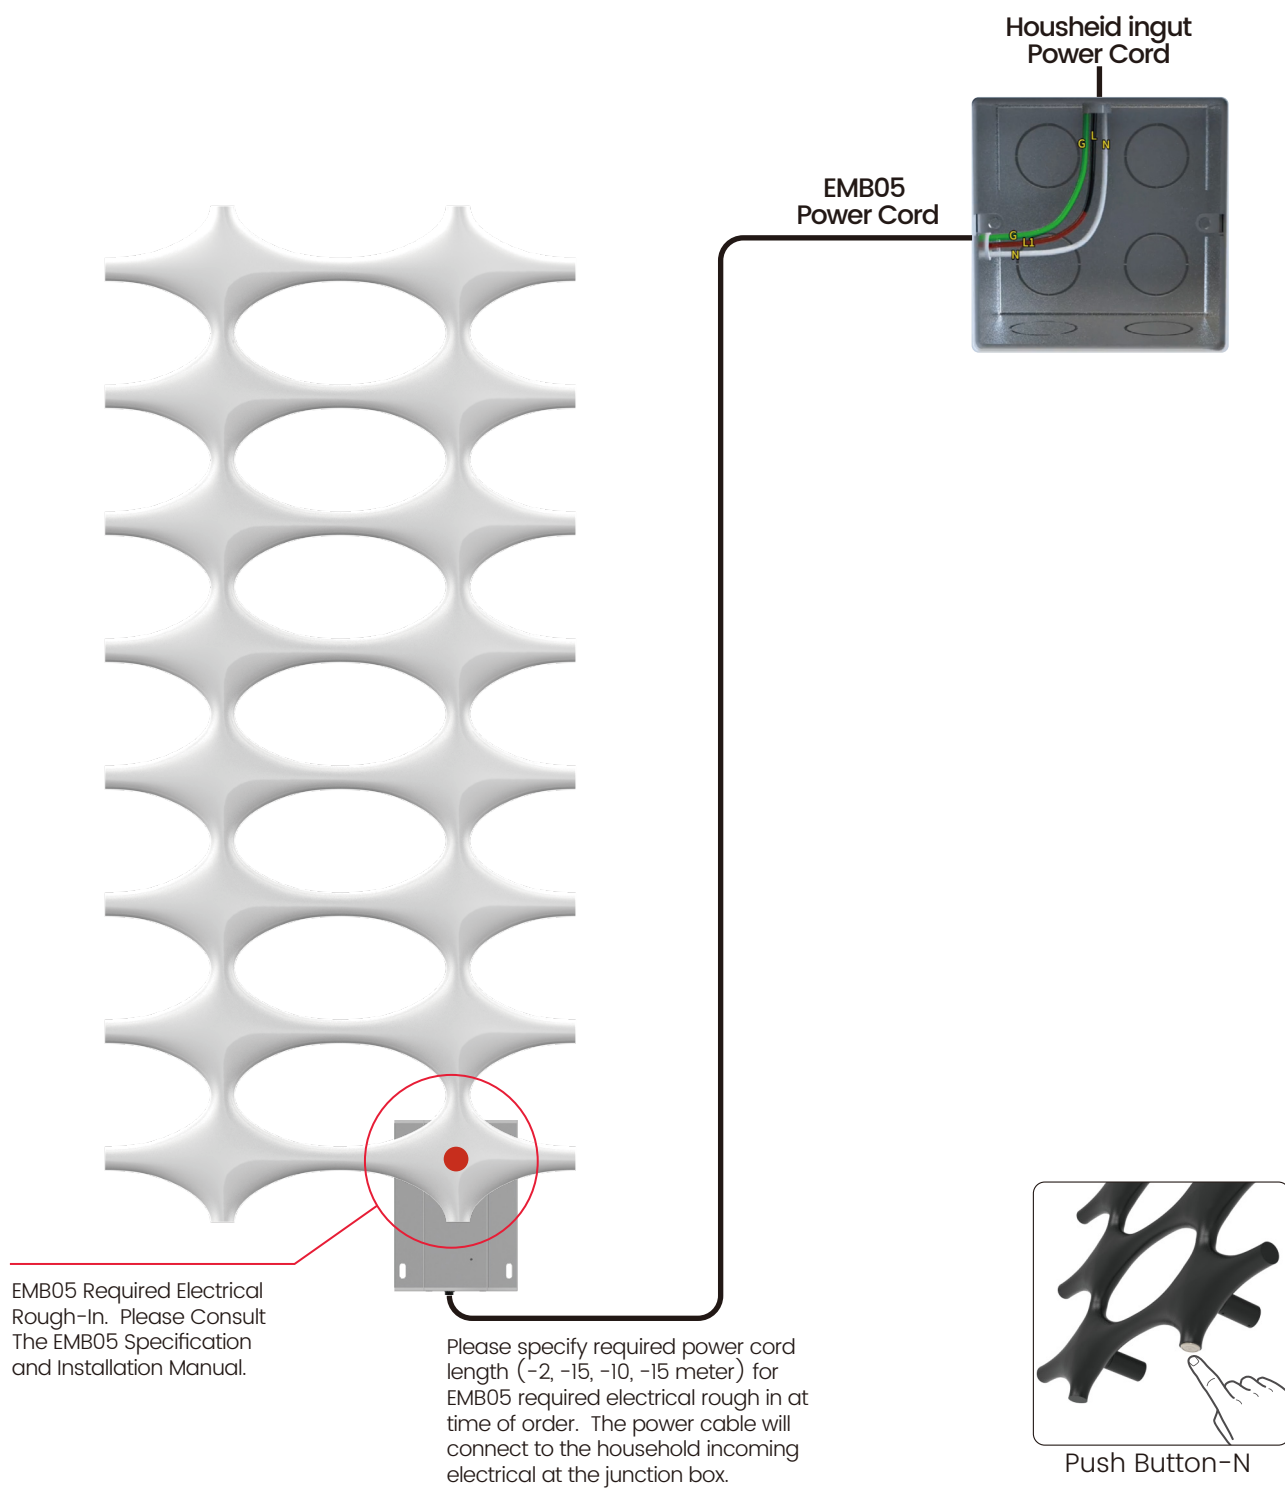

Push Button on the bottom that can be used to turn the product on or off.


Electrical Diagram

For Optional -XM Digital Metal Knob Control

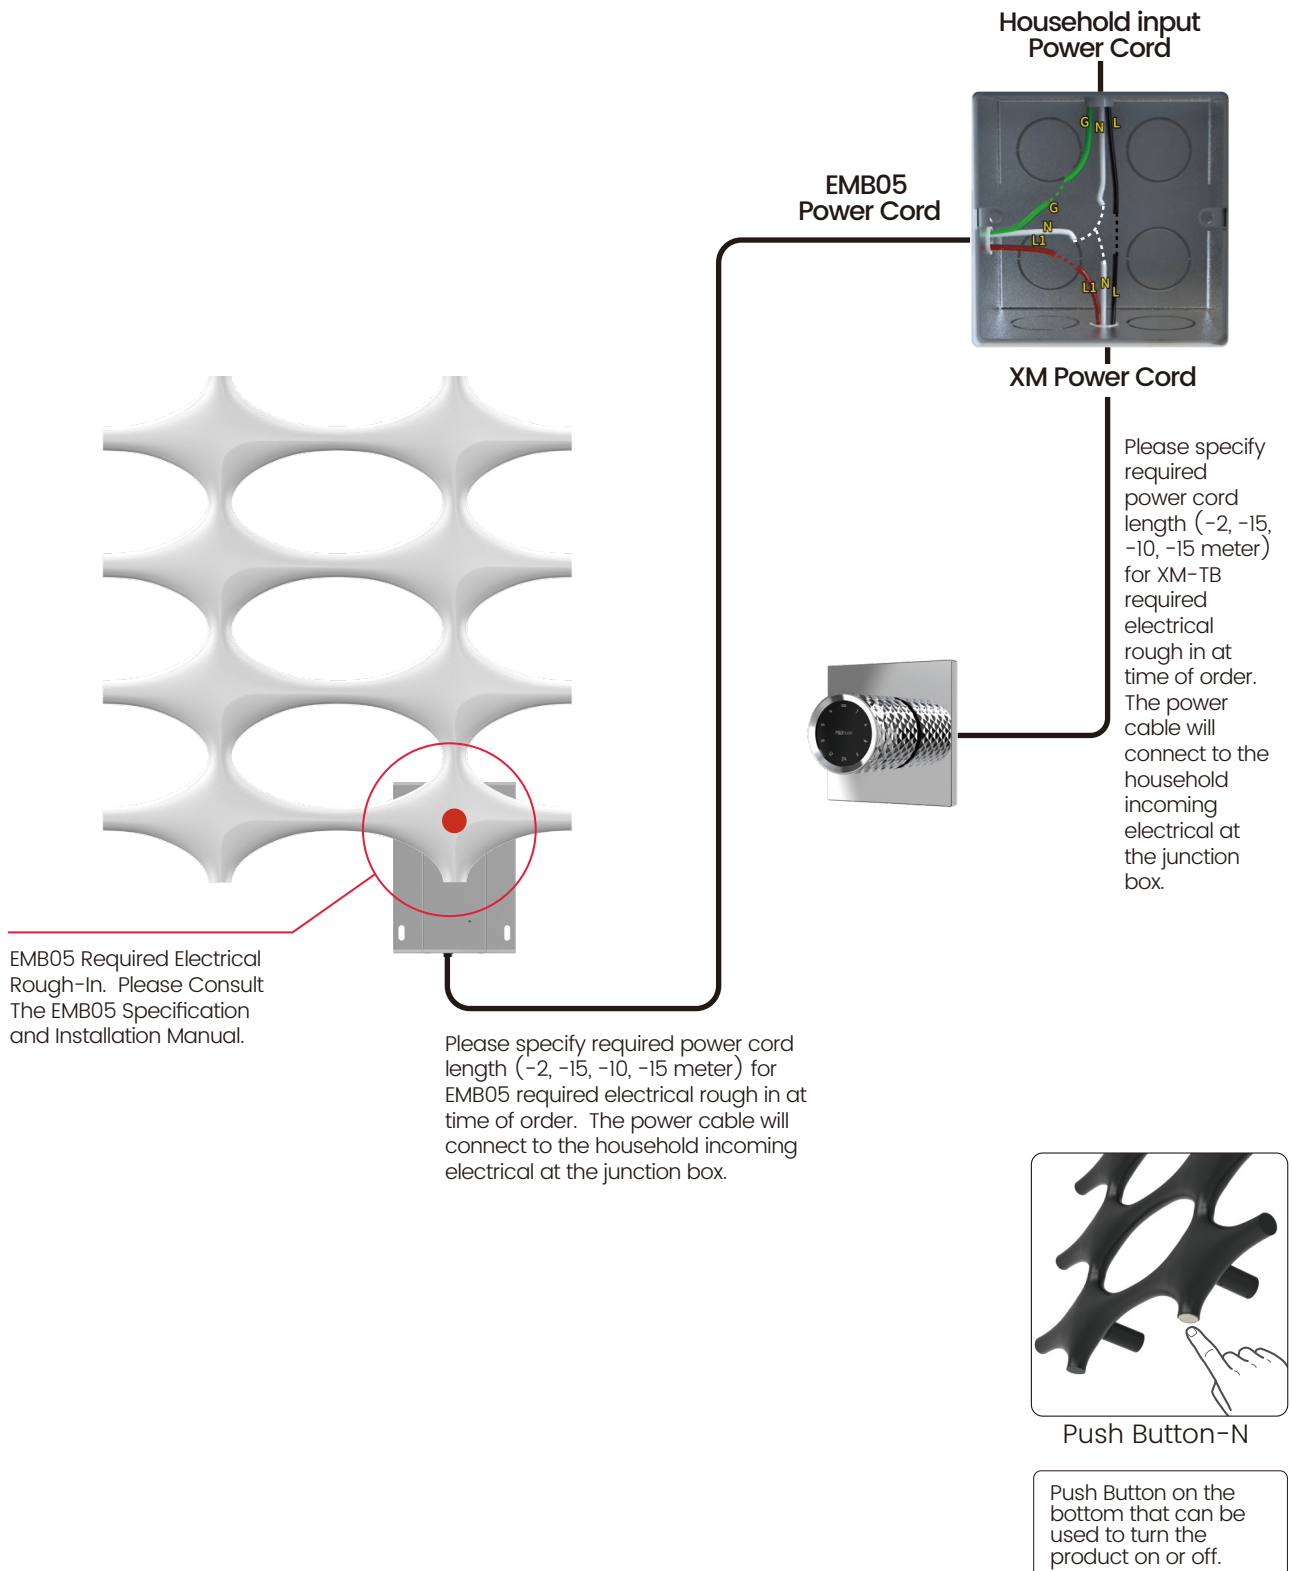

Electrical Diagram

For Optional -XM Digital Metal Knob Control

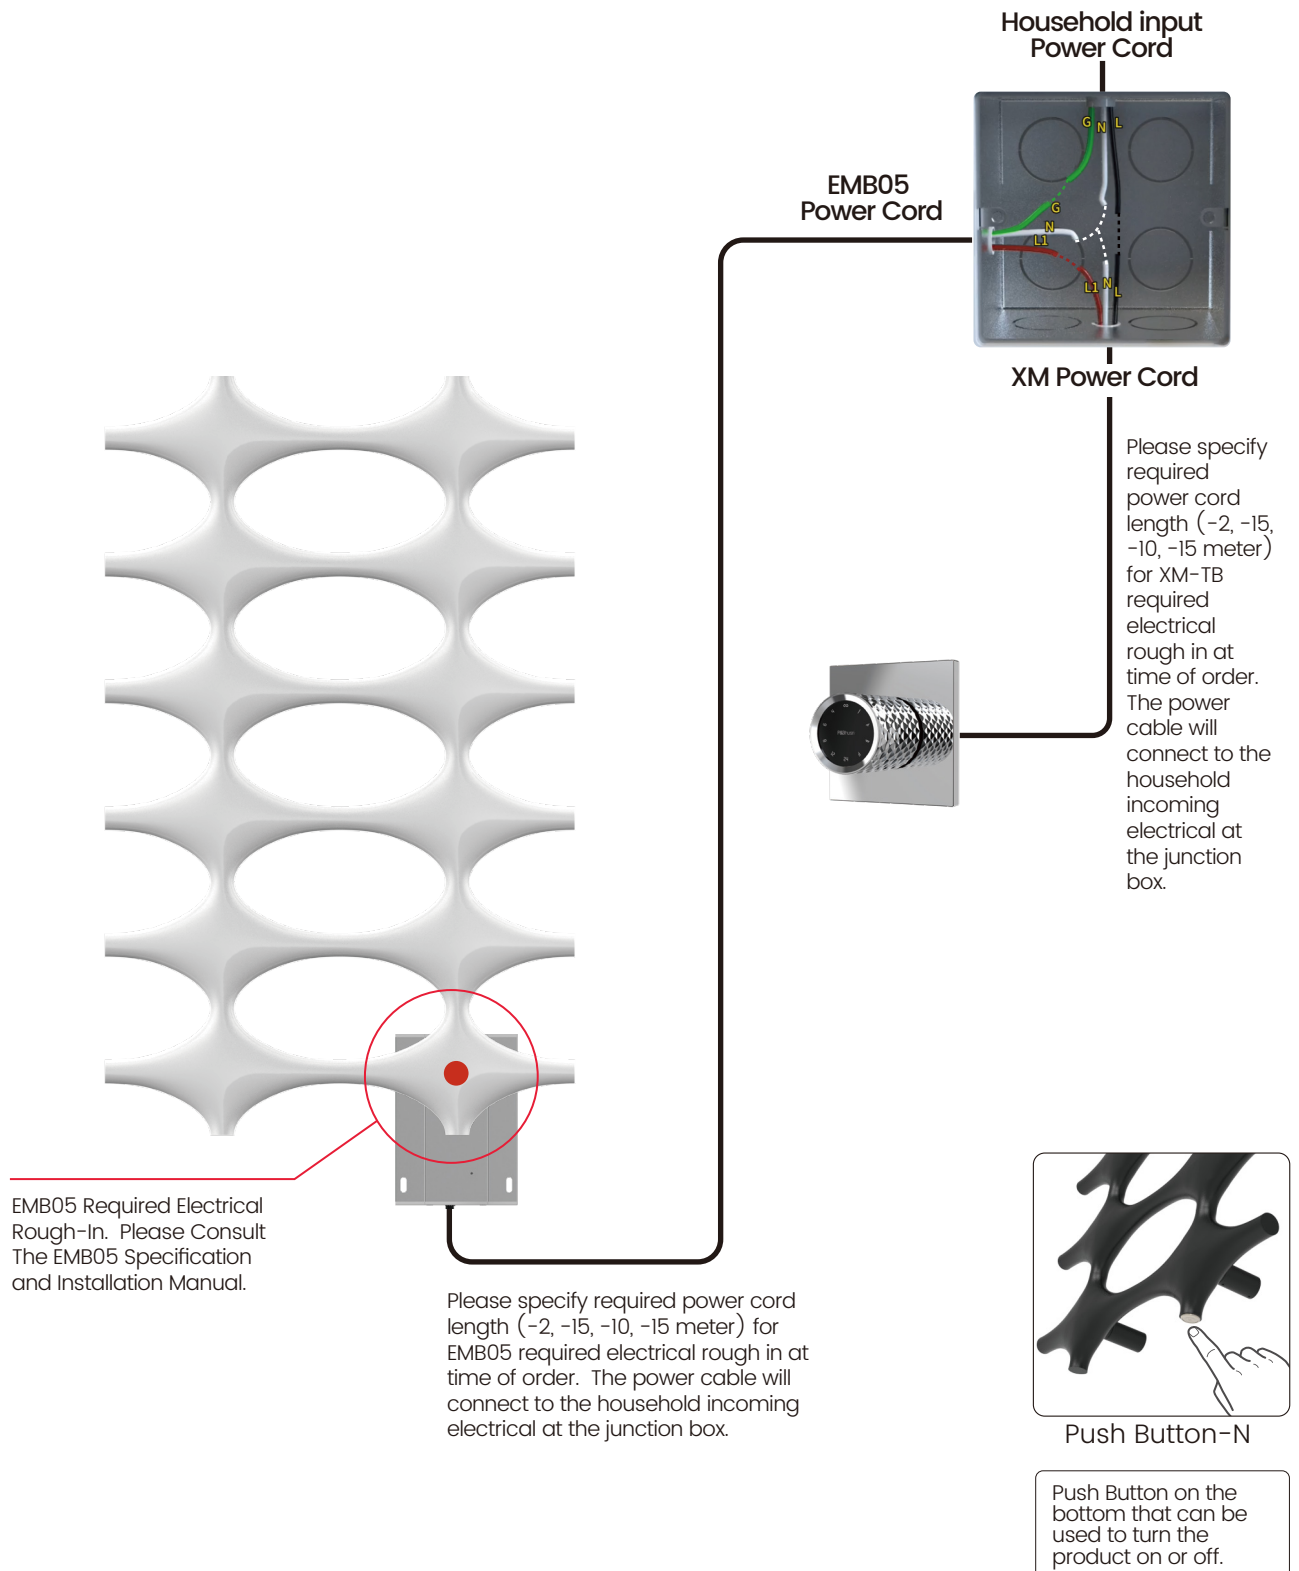

Electrical Diagram

For Optional -XM Digital Metal Knob Control

