

## K103

Electric Heated Towel Warmer




Model shown: K103-M-BBR-XK



Product Specification

|                                                                                                                      |                                                                                                                                   |                                                                            |
|----------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
| This drawing is for design reference only. For specific drilling/hole positions, please refer to the actual product. | Products and specifications are subject to change without notice. Please contact customer service for Full Size Product Template. | Finish/Color                                                               |
|                                                                                                                      |                                                                                                                                   | Please refer to the PRICE CATALOG for all finishes/colors/control options. |

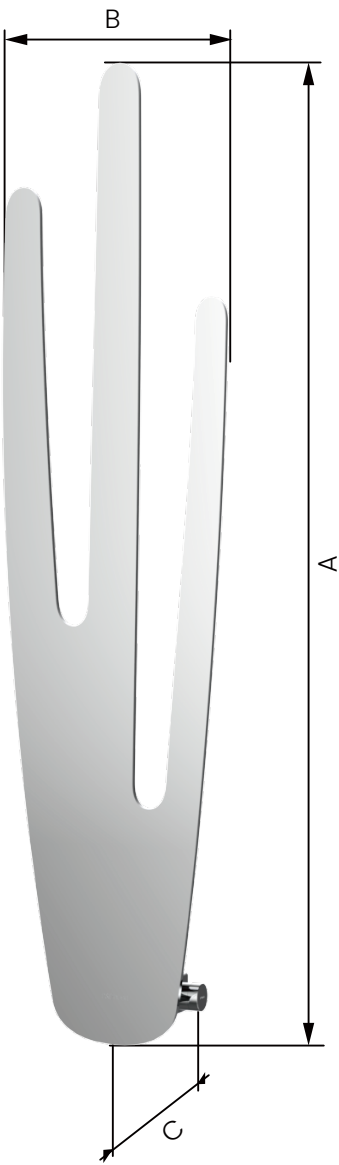

K103-M


Tolerance on dimensions: ±0.2"/±5mm

| MODEL  | A               | B              | C            |
|--------|-----------------|----------------|--------------|
| K102-3 | 46.9"<br>1190mm | 11.6"<br>295mm | 3.5"<br>90mm |

|                           |                               |
|---------------------------|-------------------------------|
| Model                     | K103-M                        |
| Package dimensions /in/mm | 50.4x15.8x6.1"/1280x402x156mm |
| Power/W                   | 164                           |
| Net weight /kg            | 25.13lb/11.4kg                |

Mounting & Hole Layout

|                                                                                                                      |                                                                                                                                   |                                                                            |
|----------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
| This drawing is for design reference only. For specific drilling/hole positions, please refer to the actual product. | Products and specifications are subject to change without notice. Please contact customer service for Full Size Product Template. | Finish/Color                                                               |
|                                                                                                                      |                                                                                                                                   | Please refer to the PRICE CATALOG for all finishes/colors/control options. |

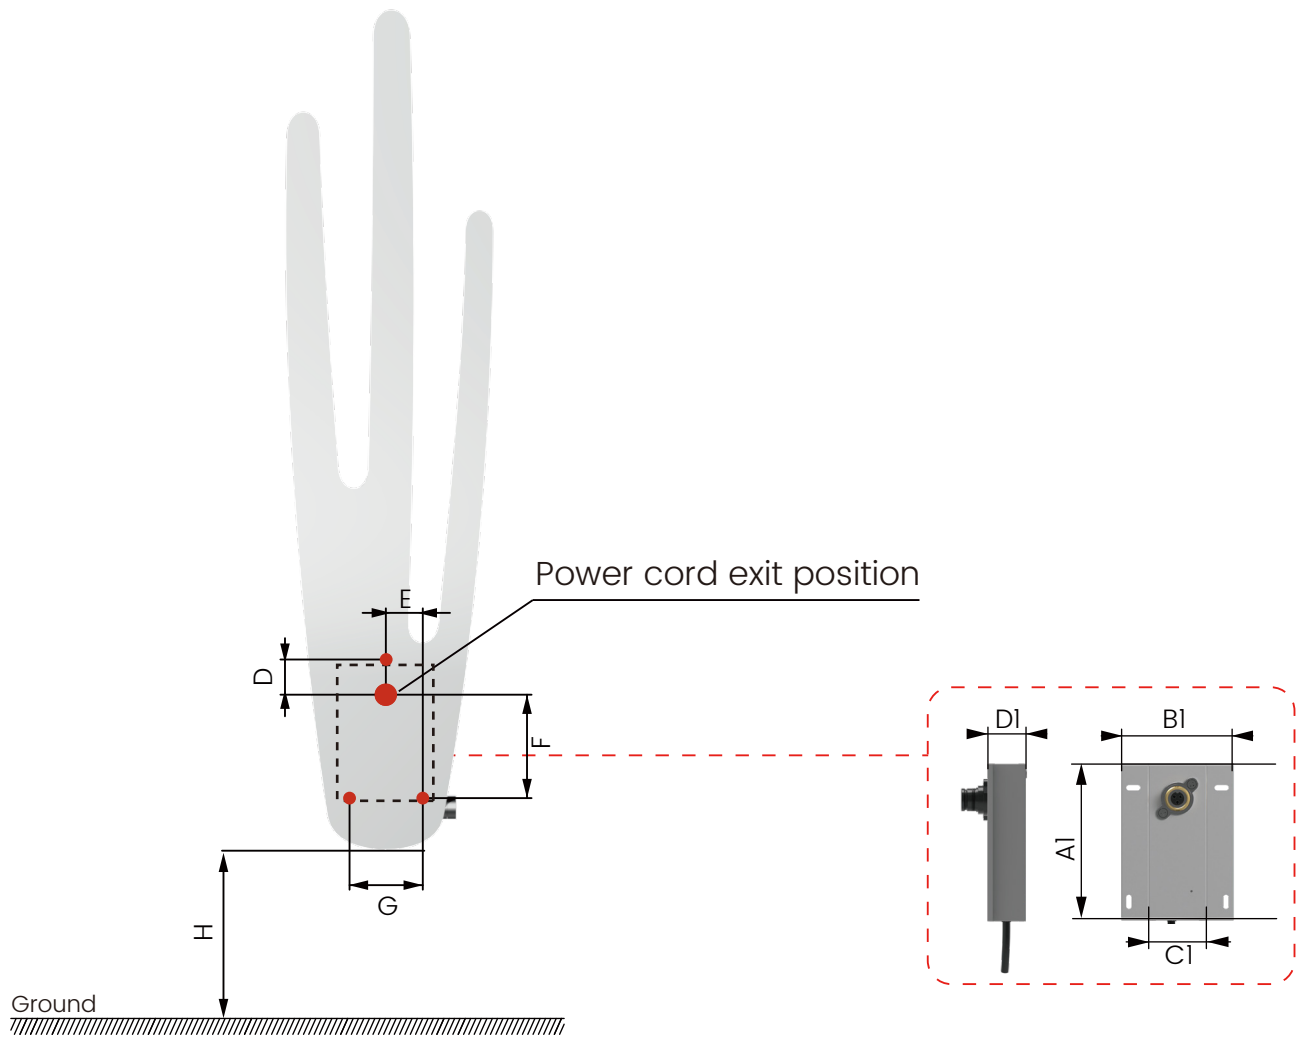

**NOTE**

The Rough Body Fixed Block Box Must Be Installed Flush With the Exterior Edge Of The Wood Studs/Cross Beams To Ensure Proper Rough-In Dimension.

**Stud Wall Installation**


**NOTE** The thickness of the finished wall application (including drywall, and tile, stone, etc..) should not be less than 0.5in/15mm and should not exceed 1.5in/40mm.

Tolerance on dimensions:  $\pm 0.2''/\pm 5\text{mm}$

| MODEL  | D            | E            | F             | G             | H              | A1            | B1            | C1           | D1           |
|--------|--------------|--------------|---------------|---------------|----------------|---------------|---------------|--------------|--------------|
| K103-M | 1.5"<br>39mm | 1.6"<br>40mm | 4.4"<br>113mm | 3.1"<br>140mm | 11.8"<br>300mm | 5.7"<br>145mm | 4.1"<br>103mm | 2.3"<br>58mm | 1.4"<br>35mm |

## Electrical Diagram

### For Integrated Control

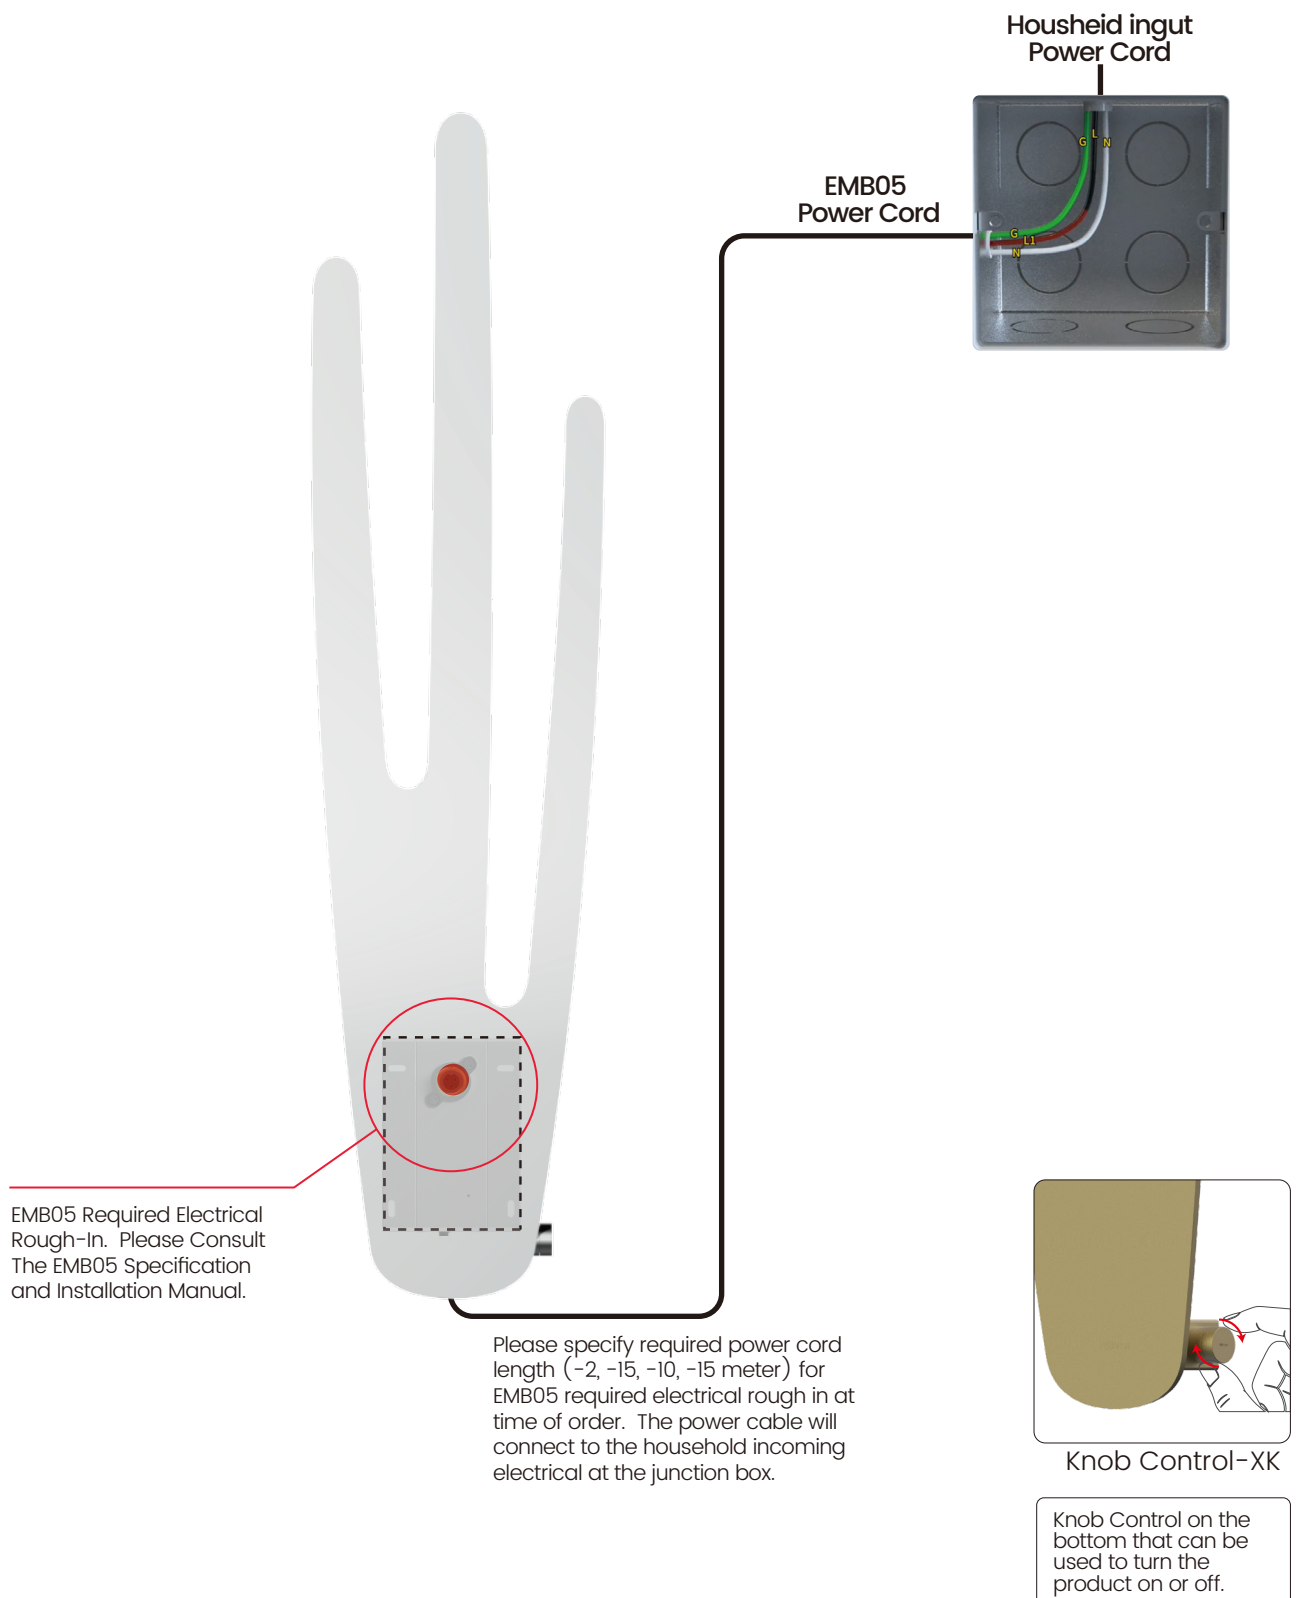

## Electrical Diagram

### For Optional -XM Digital Metal Knob Control

