

K23

Electric Heated Towel Warmer




Model shown: K23-M-MWH-N-3



Product Specification

This drawing is for design reference only. For specific drilling/hole positions, please refer to the actual product.	Products and specifications are subject to change without notice. Please contact customer service for Full Size Product Template.	Finish/Color
		Please refer to the PRICE CATALOG for all finishes/colors/control options.

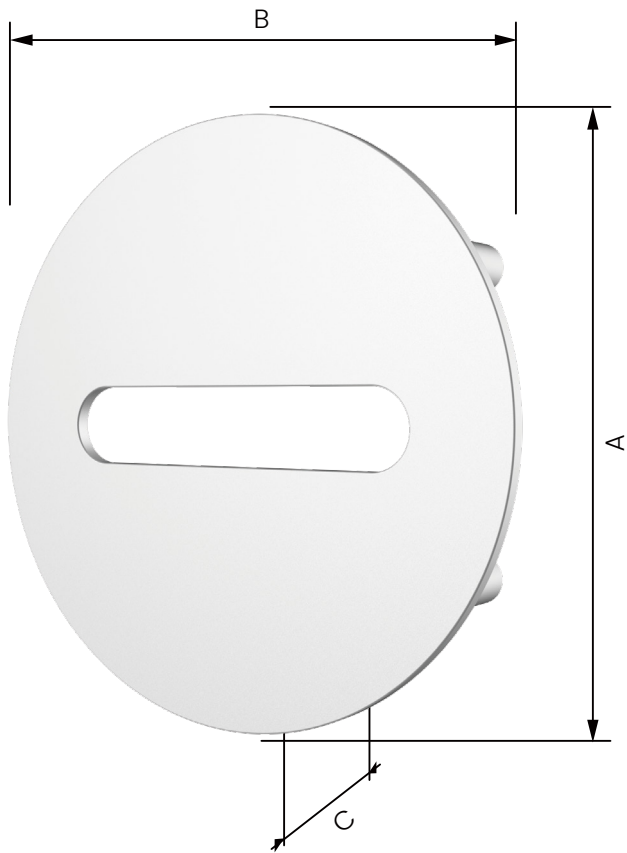

K23-M


Tolerance on dimensions: ±0.2"/±5mm

MODEL	A	B	C
K23	11.8" 300mm	11.8" 300mm	3.5" 88mm

Model	K23-M
Package dimensions /in/mm	20x15.4x6.5"/509x390x166mm
Power/W	33
Net weight /kg	4.34lb/1.97kg

Mounting & Hole Layout

This drawing is for design reference only. For specific drilling/hole positions, please refer to the actual product.	Products and specifications are subject to change without notice. Please contact customer service for Full Size Product Template.	Finish/Color
		Please refer to the PRICE CATALOG for all finishes/colors/control options.

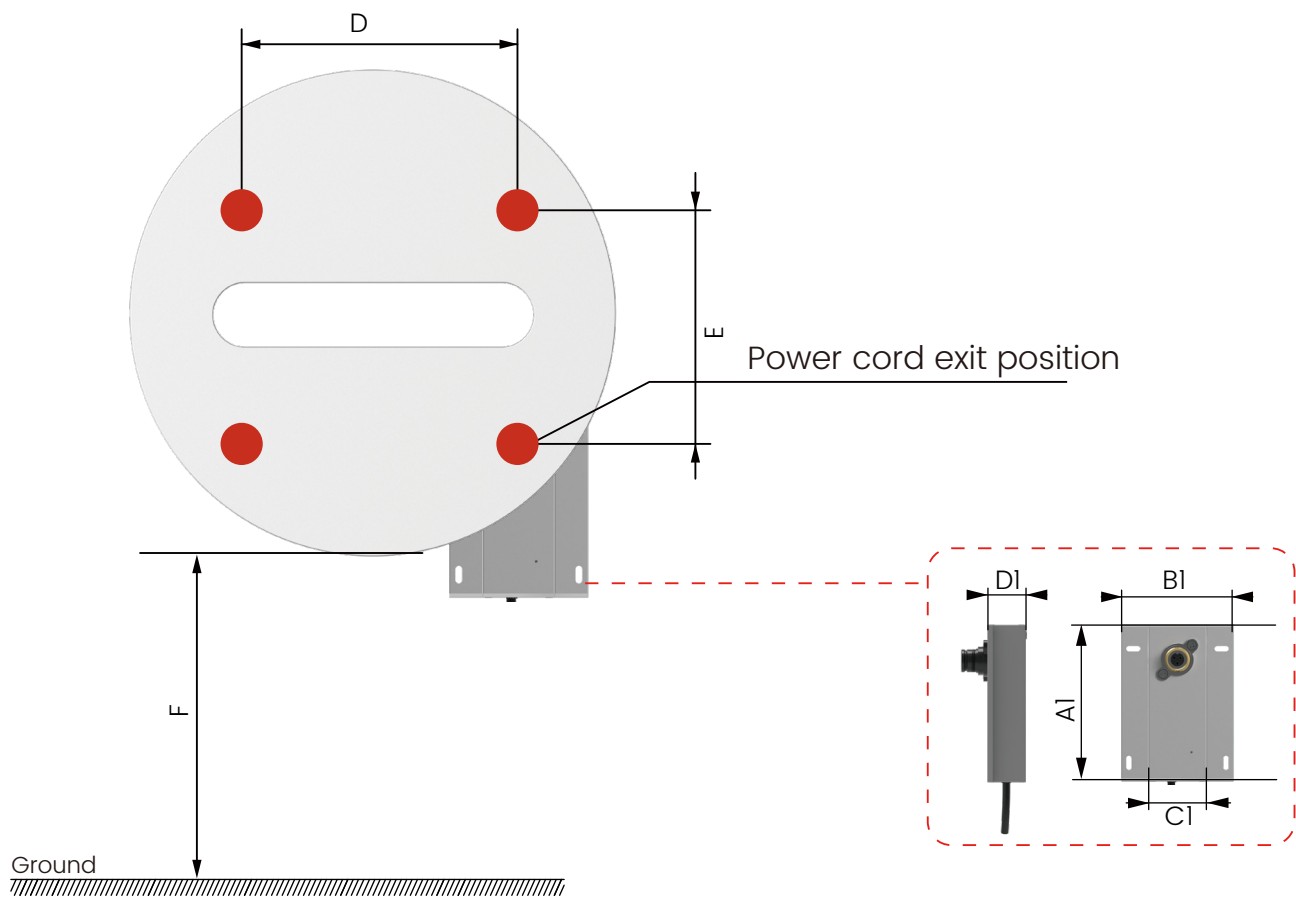

NOTE
The Rough Body Fixed Block Box Must Be Installed Flush With the Exterior Edge Of The Wood Studs/Cross Beams To Ensure Proper Rough-In Dimension.

Stud Wall Installation

NOTE
The thickness of the finished wall application (including drywall, and tile, stone, etc..) should not be less than 0.5in/15mm and should not exceed 1.5in/40mm.


The diagram shows the unit being installed into a wall between wooden studs. Two cross-sections are shown: one for a wall thickness of 0.5in/15mm and another for 1.5in/40mm. The unit is shown flush with the exterior edge of the studs.

Tolerance on dimensions: ±0.2"/±5mm

MODEL	D	E	F	A1	B1	C1	D1
K23-M	7.2" 183mm	6.1" 155mm	55.1" 1400mm	5.7" 145mm	4.1" 103mm	2.3" 58mm	1.4" 35mm

Electrical Diagram

For Integrated Control

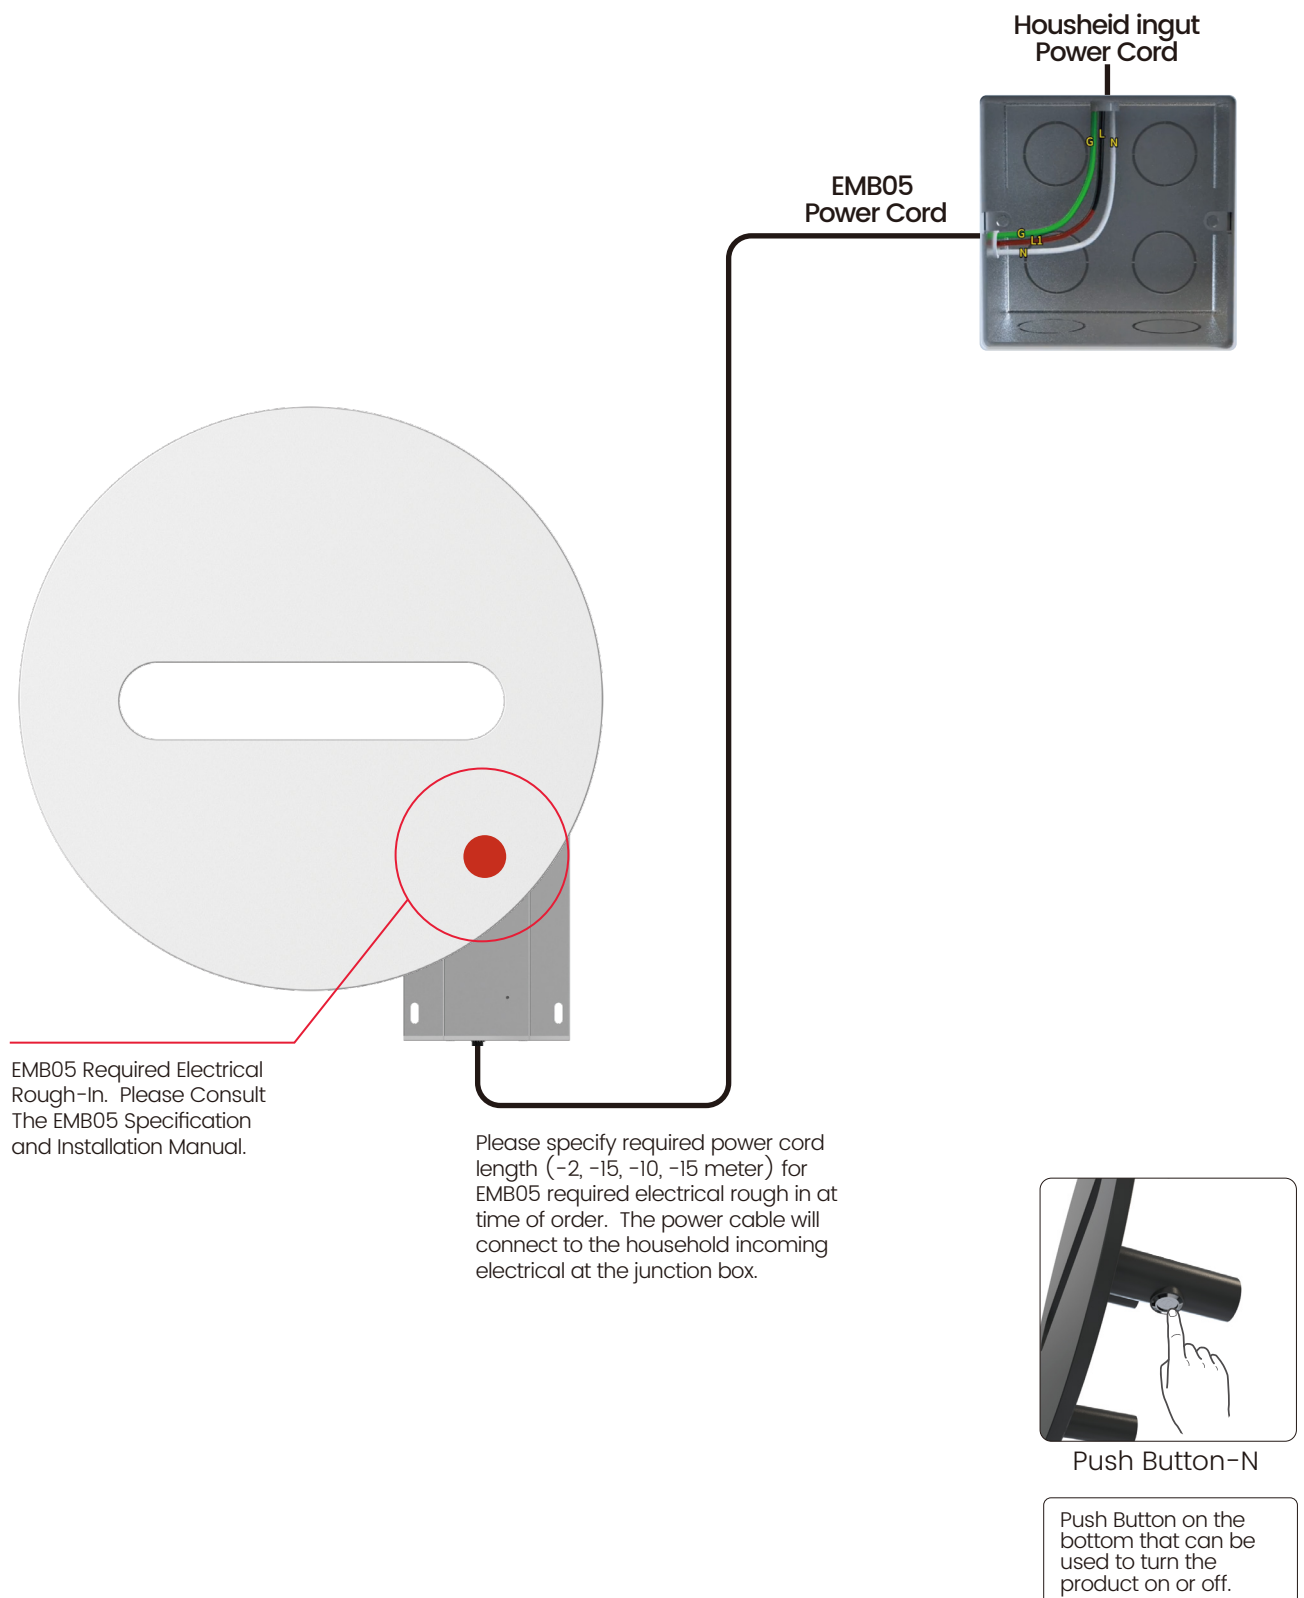

Electrical Diagram

For Optional -XM Digital Metal Knob Control

