

G26

Electric Heated Towel Warmer




Model shown: G26-L-CHR-XY



Product Specification

This drawing is for design reference only. For specific drilling/hole positions, please refer to the actual product.	Products and specifications are subject to change without notice. Please contact customer service for Full Size Product Template.	Finish/Color
		Please refer to the PRICE CATALOG for all finishes/colors/control options.

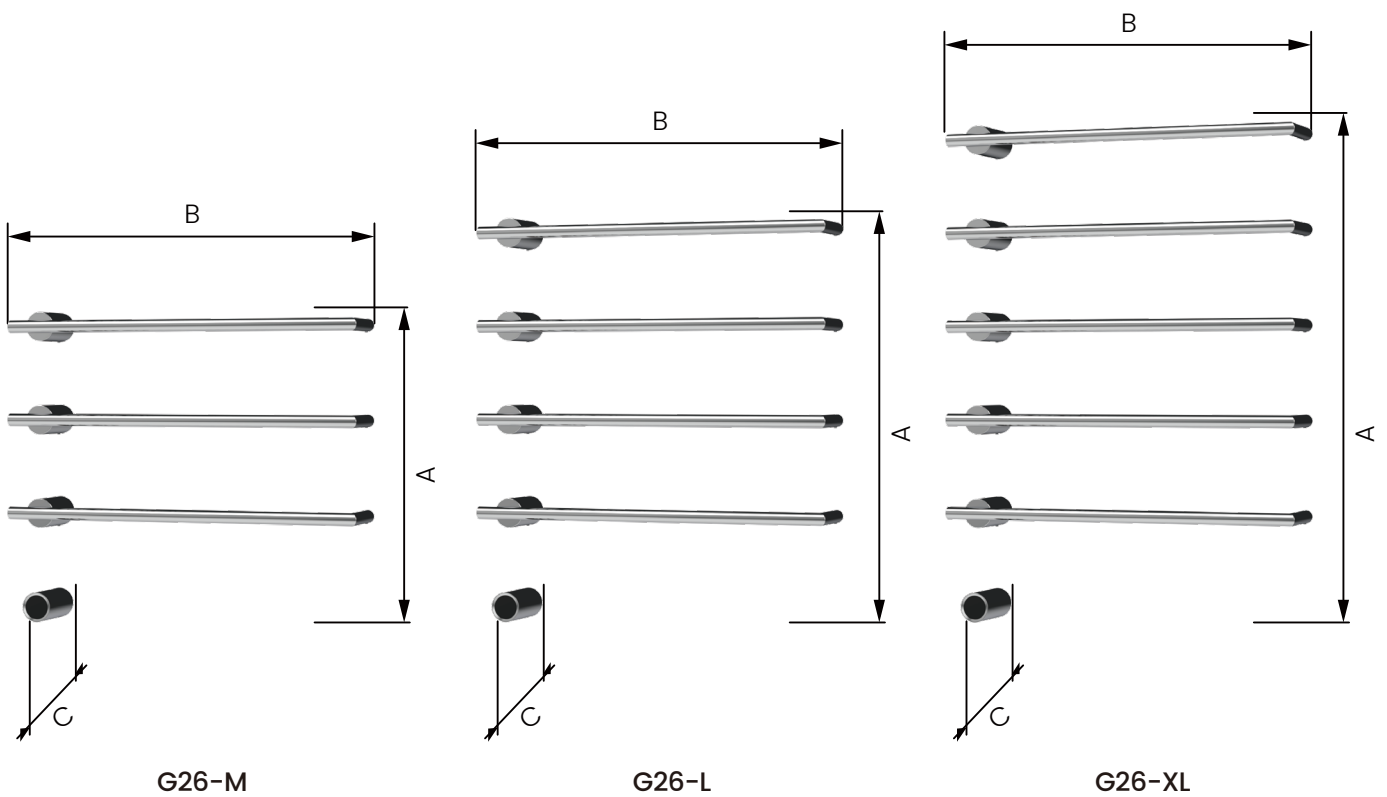


Tolerance on dimensions: $\pm 0.2'' / \pm 5\text{mm}$

MODEL	A	B	C
G26-M	19.6" 497mm	22.8" 580mm	4.1" 105mm
G26-L	25.5" 647mm	22.8" 580mm	4.1" 105mm
G26-XL	31.4" 797mm	22.8" 580mm	4.1" 105mm

Model	G26-M	G26-L	G26-XL
Package dimensions /in/mm	29.2x14.6x4.9"/742x370x124mm	29.2x16.0x4.9"/742x407x124mm	29.2x21.4x4.9"/742x543x124mm
Power/W	36	48	60
Net weight /kg			

Mounting & Hole Layout

This drawing is for design reference only. For specific drilling/hole positions, please refer to the actual product.	Products and specifications are subject to change without notice. Please contact customer service for Full Size Product Template.	Finish/Color
		Please refer to the PRICE CATALOG for all finishes/colors/control options.

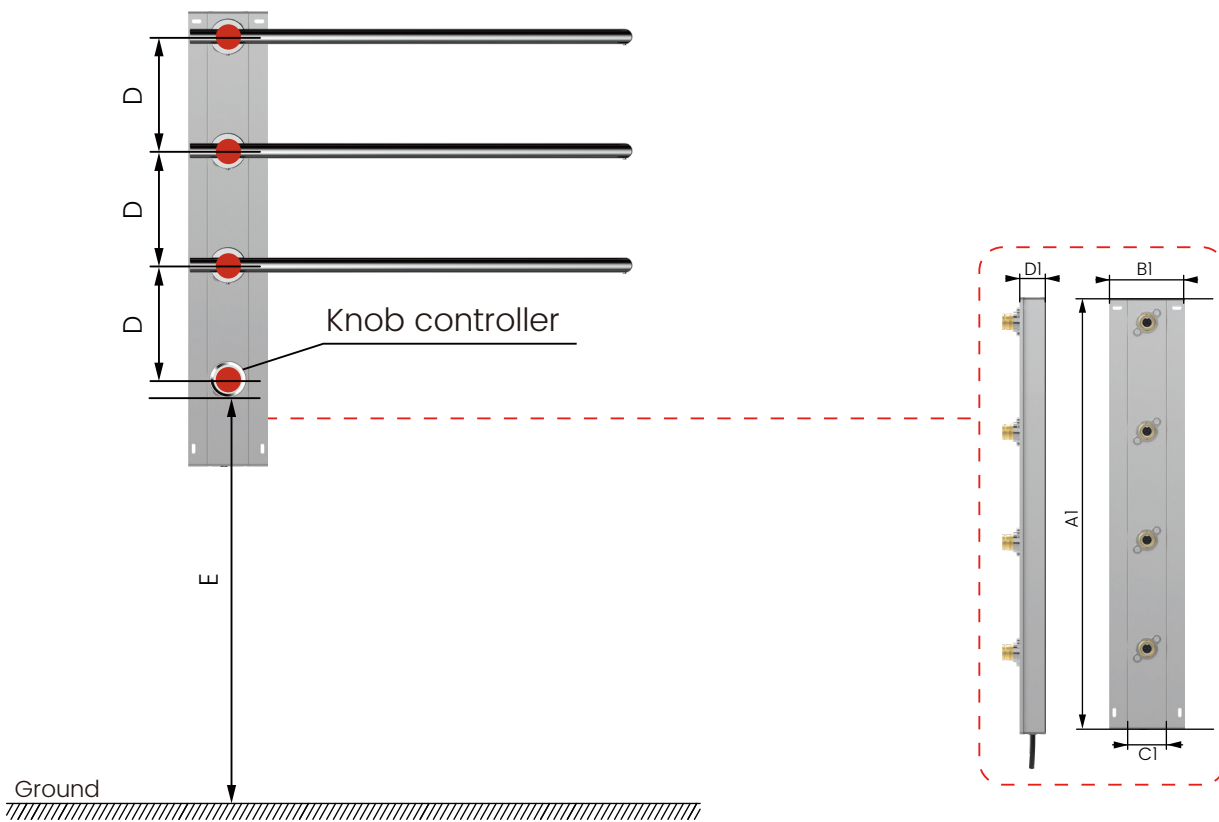

NOTE
The Rough Body Fixed Black Box Must Be Installed Flush With the Exterior Edge Of The Wood Studs/Cross Beams To Ensure Proper Rough-In Dimension.

Stud Wall Installation


NOTE The thickness of the finished wall application (including drywall, and tile, stone, etc..) should not be less than 0.5in/15mm and should not exceed 1.5in/40mm.

Tolerance on dimensions: $\pm 0.2''/\pm 5\text{mm}$

MODEL	D	E	A1	B1	C1	D1
G26-M	5.9" 150mm	43.3" 1100mm	23.4" 595mm	4.1" 103mm	2.3" 58mm	1.4" 35mm

Mounting & Hole Layout

This drawing is for design reference only. For specific drilling/hole positions, please refer to the actual product.	Products and specifications are subject to change without notice. Please contact customer service for Full Size Product Template.	Finish/Color
		Please refer to the PRICE CATALOG for all finishes/colors/control options.

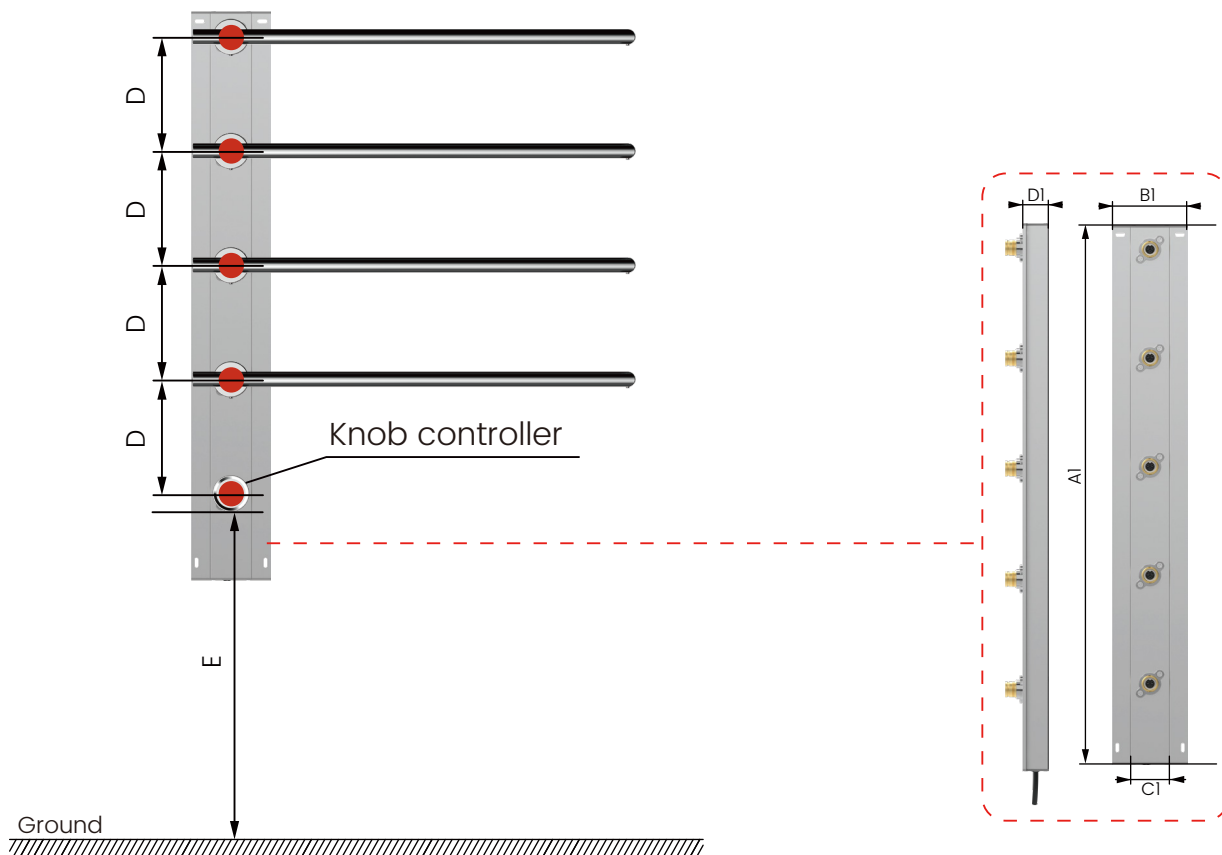

NOTE
The Rough Body Fixed Black Box Must Be Installed Flush With the Exterior Edge Of The Wood Studs/Cross Beams To Ensure Proper Rough-In Dimension.

Stud Wall Installation


NOTE The thickness of the finished wall application (including drywall, and tile, stone, etc..) should not be less than 0.5in/15mm and should not exceed 1.5in/40mm.

Tolerance on dimensions: $\pm 0.2''/\pm 5\text{mm}$

MODEL	D	E	A1	B1	C1	D1
G26-L	5.9" 150mm	37.4" 950mm	29.3" 745mm	4.1" 103mm	2.3" 58mm	1.4" 35mm

Mounting & Hole Layout

<p>This drawing is for design reference only. For specific drilling/hole positions, please refer to the actual product.</p>	<p>Products and specifications are subject to change without notice. Please contact customer service for Full Size Product Template.</p>	<p style="text-align: center;">Finish/Color</p> <p>Please refer to the PRICE CATALOG for all finishes/colors/control options.</p>
---	--	---

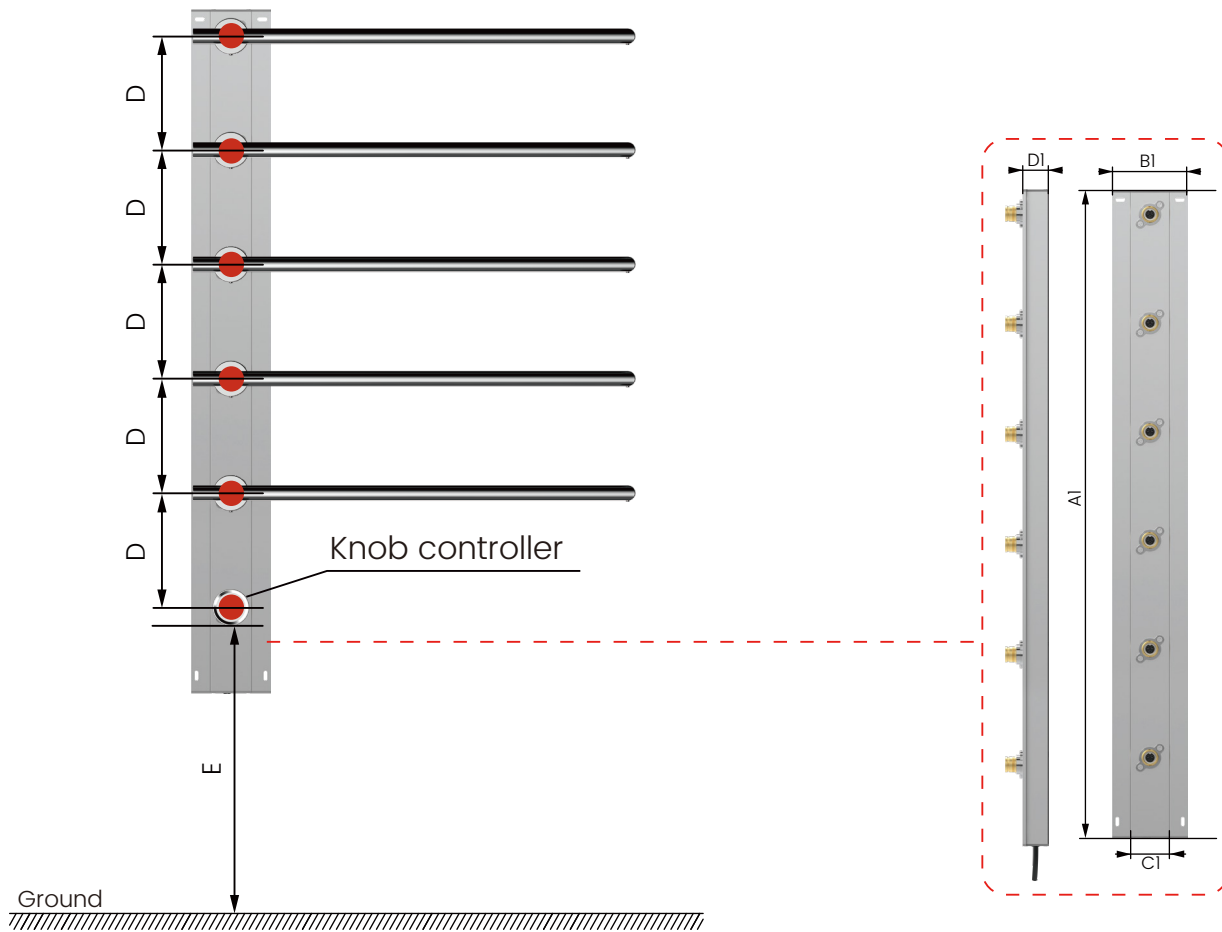

Stud Wall Installation

NOTE
The Rough Body Fixed Black Box Must Be Installed Flush With the Exterior Edge Of The Wood Studs/Cross Beams To Ensure Proper Rough-In Dimension.


NOTE The thickness of the finished wall application (including drywall, and tile, stone, etc.) should not be less than 0.5in/15mm and should not exceed 1.5in/40mm.

Tolerance on dimensions: $\pm 0.2''/\pm 5\text{mm}$

MODEL	D	E	A1	B1	C1	D1
G26-XL	5.9" 150mm	31.5" 800mm	35.2" 895mm	4.1" 103mm	2.3" 58mm	1.4" 35mm

Electrical Diagram

For Integrated Control

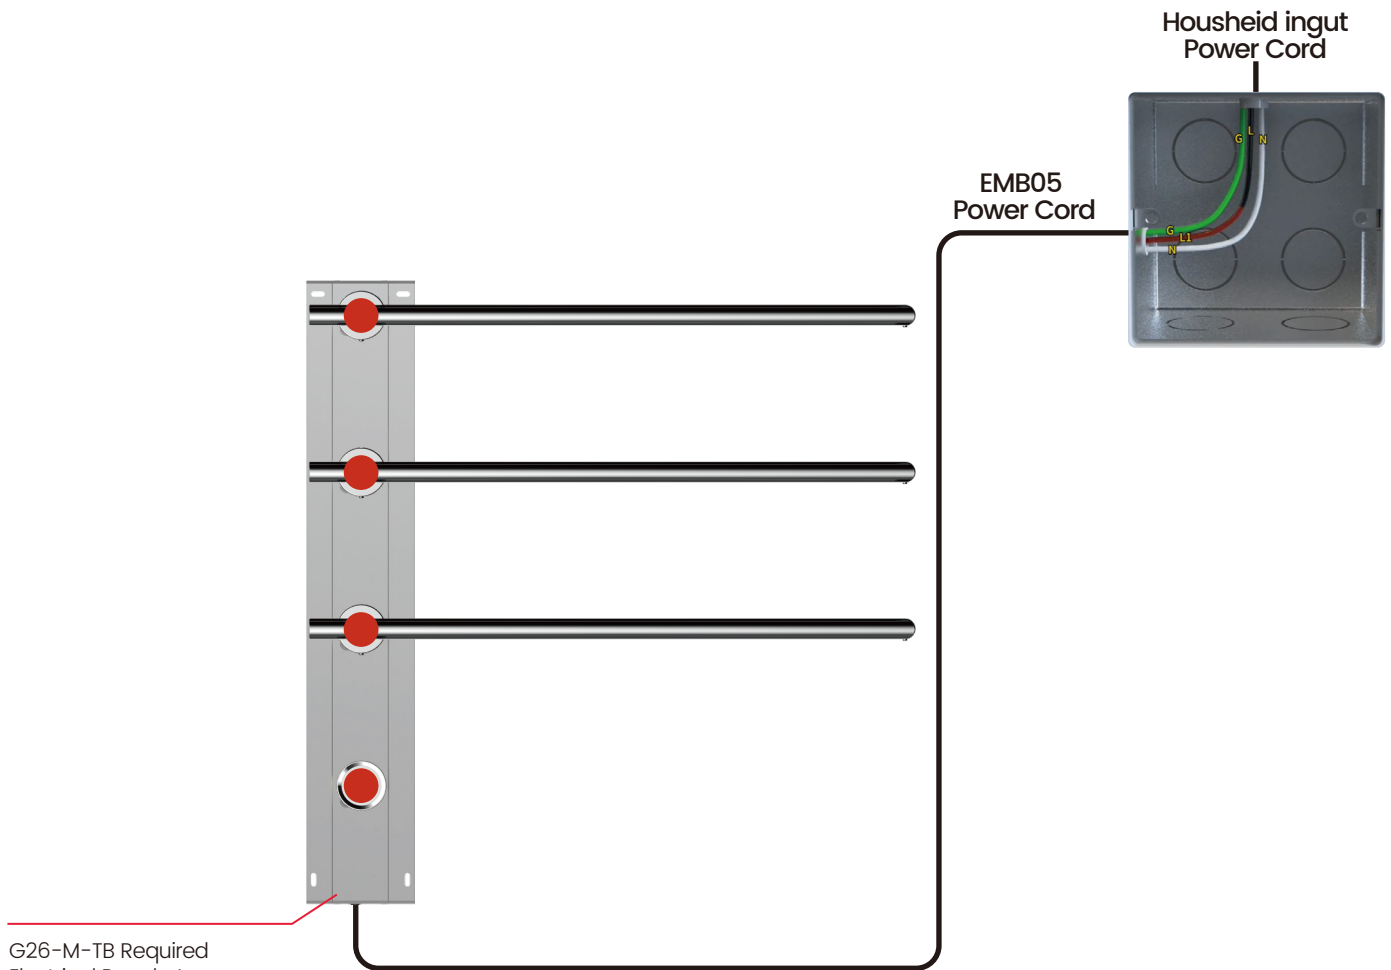


G26-M-TB Required Electrical Rough-In. Please Consult The G26-TB Specification and Installation Manual.

Please specify the pre-installed cord length at the time of ordering: G26-X-2 (2 meter cord), G26-X-5 (5 meter cord), G26-X-10 (10 meter cord), G26-X-15 (15 meter cord).

Electrical Diagram


For Integrated Control

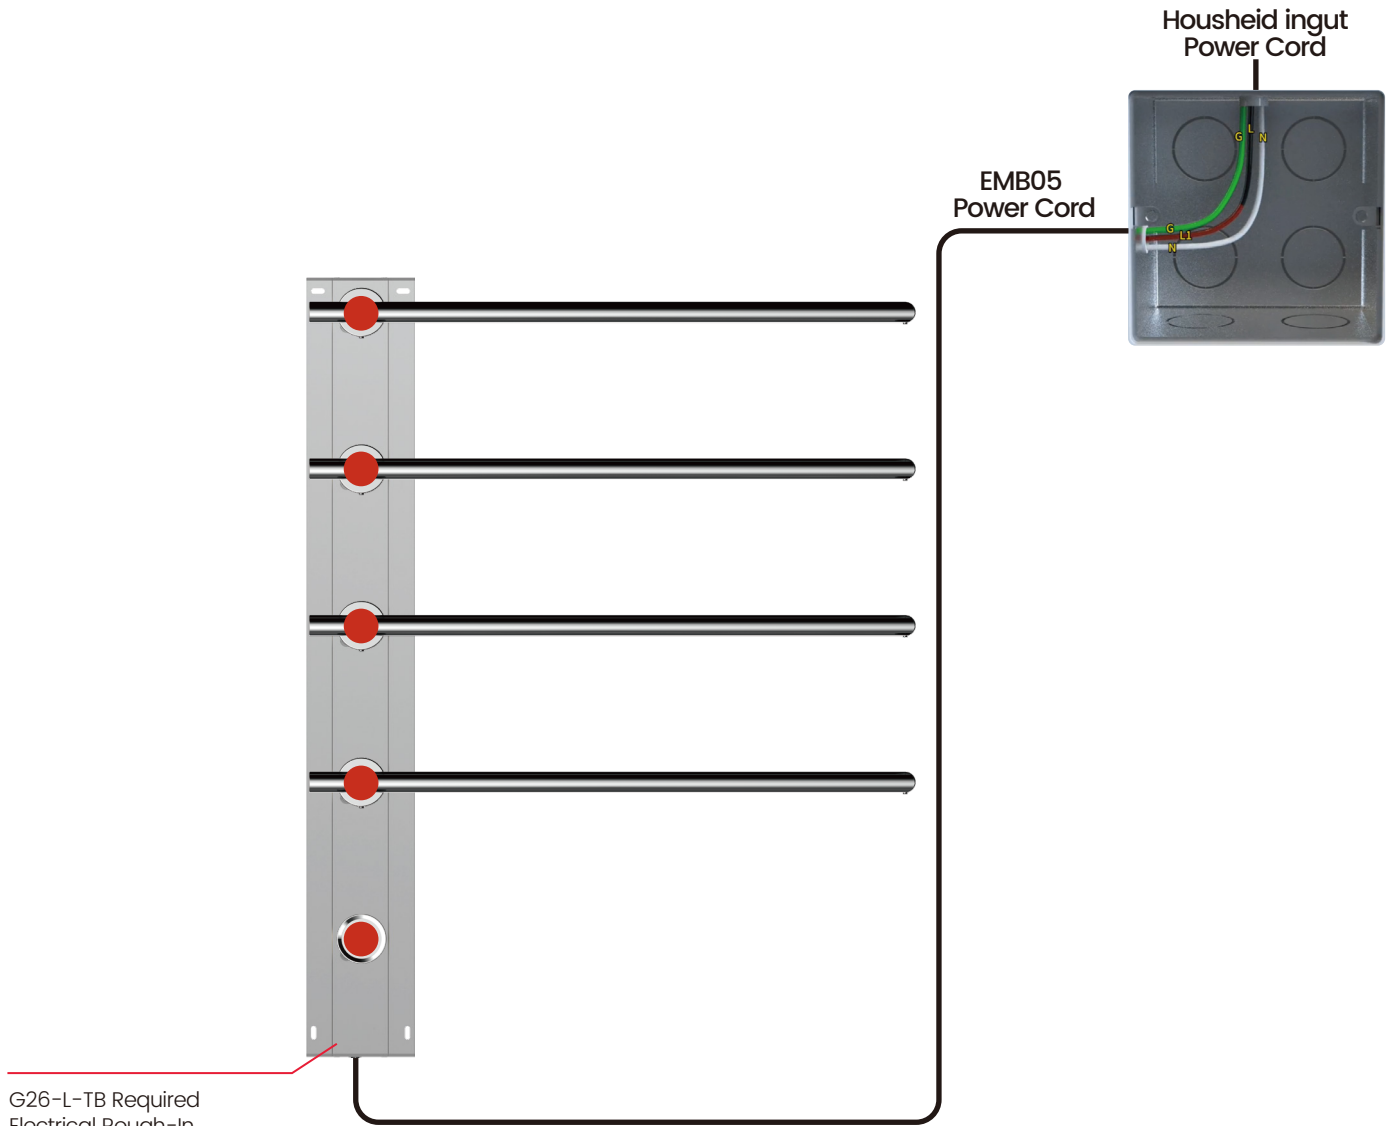

G26-L-TB Required Electrical Rough-In. Please Consult The G26-TB Specification and Installation Manual.

Please specify the pre-installed cord length at the time of ordering: G26-X-2 (2 meter cord), 26-X-5 (5 meter cord), G26-X-10 (10 meter cord), G26-X-15 (15 meter cord).

Electrical Diagram For Integrated Control

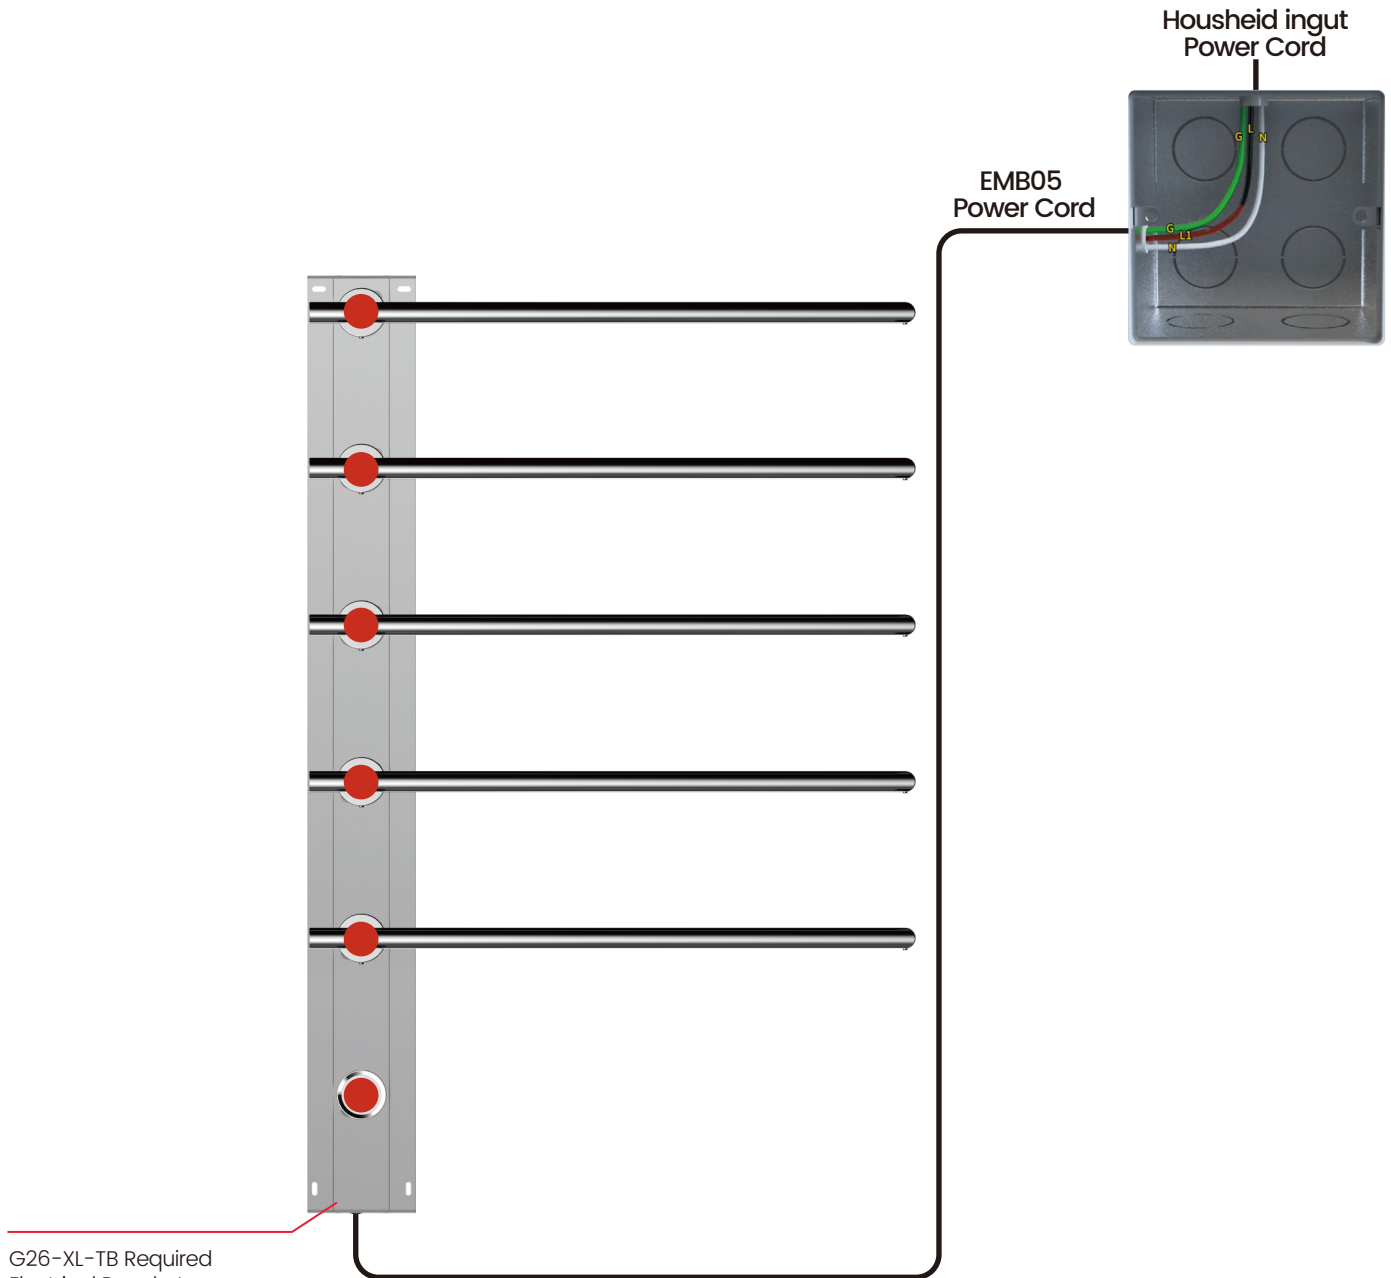

G26-XL-TB Required Electrical Rough-In. Please Consult The G26-TB Specification and Installation Manual.

Please specify the pre-installed cord length at the time of ordering: G26-X-2 (2 meter cord), 26-X-5 (5 meter cord), G26-X-10 (10 meter cord), G26-X-15 (15 meter cord).