

产品介绍 product description



直臂 Full Overlay






中曲 Half Overlay



大曲 Inest

底座安装孔位与盖位表 Installation hole location



H=14+K-D

D	K	3	4	5	6	7
H						
0		17	18	19	20	21
2		15	16	17	18	19
4		13	14	15	16	17


H=5+K-D

D	K	3	4	5	6	7
H						
0		8	9	10	11	12
2		6	7	8	9	10
4		4	5	6	7	8


H=-5+K-D

D	K	3	4	5	6	7
H						
0		-2	-1	0	1	2
2		-4	-3	-2	-1	0
4		-6	-5	-4	-3	-2


铰杯安装孔位尺寸 Installation hole location



孔距:45mm

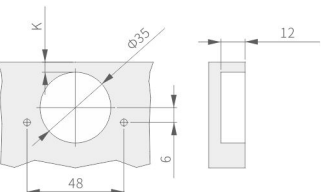


孔距:48mm

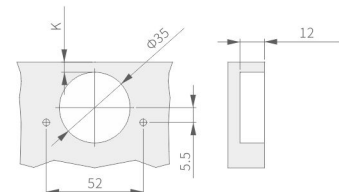

孔距:52mm

YD-GD622 固装3D调节液压铰链 Fixed hydraulic hinge

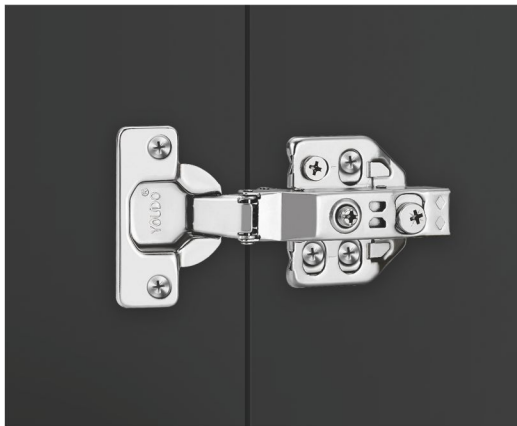

开门角度:102°
适用门板厚度:14-20mm
门板K距离:3-7mm
原材料:冷轧钢
工序:镀铜镀镍
杯孔尺寸:48mm (45mm/52mm)
杯直径/深:35mm/11.5mm
性能:前后调节(深度)±2毫米、上下调节(竖向)±2毫米、左右调节(横向)+1~4毫米
Opening angle:102°
Door thickness:14-20mm
Door (K) dimension:3-7mm
Material:cold-rolled steel
Surface:copper&Nickel plated
Hole distance:48mm (45mm/52mm)
Diameter/depth of hinge cup:35mm/11.5mm
Performance: front and rear adjustment (depth) ± 2 mm, up and down adjustment (vertical) ± 2 mm, left and right adjustment (horizontal) +1~4mm

产品介绍 product description



直臂 Full Overlay






中曲 Half Overlay



大曲 Inest

底座安装孔位与盖位表 Installation hole location



H=14+K-D

D	K	3	4	5	6	7
H						
0		17	18	19	20	21
2		15	16	17	18	19
4		13	14	15	16	17


H=5+K-D

D	K	3	4	5	6	7
H						
0		8	9	10	11	12
2		6	7	8	9	10
4		4	5	6	7	8


H=-5+K-D

D	K	3	4	5	6	7
H						
0		-2	-1	0	1	2
2		-4	-3	-2	-1	0
4		-6	-5	-4	-3	-2


铰杯安装孔位尺寸 Installation hole location

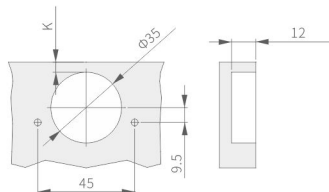

孔距:45mm

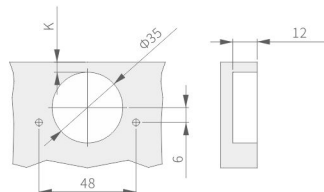


孔距:48mm

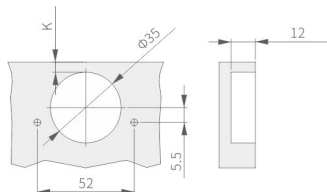

孔距:52mm

YD-PD622 自卸3D调节液压铰链 Clip on hydraulic hinge

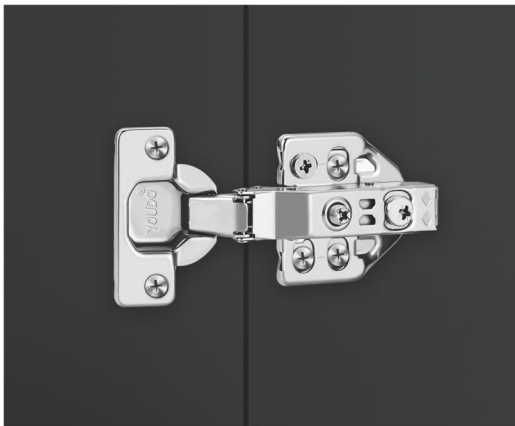

开门角度:102°
适用门板厚度:14-20mm
门板K距离:3-7mm
原材料:冷轧钢
工序:镀铜镀镍
杯孔尺寸:48mm (45mm/52mm)
杯直径/深:35mm/11.5mm
性能:前后调节(深度)±2毫米、上下调节(竖向)±2毫米、左右调节(横向)+1~4毫米
Opening angle:102°
Door thickness:14-20mm
Door (K) dimension:3-7mm
Material:cold-rolled steel
Surface:copper&Nickel plated
Hole distance:48mm (45mm/52mm)
Diameter/depth of hinge cup:35mm/11.5mm
Performance: front and rear adjustment (depth) ± 2 mm, up and down adjustment (vertical) ± 2 mm, left and right adjustment (horizontal) +1~4mm