


产品介绍 product description



底座安装孔位与盖位表 Installation hole location


90° hinges
90°铝框铰链



$H=12+K-D$

D	H	K	3	4	5	6	7
0	15	16	17	18	19		


45° hinges
45°铝框铰链

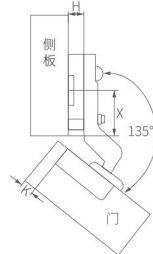

$H=4+K-D$

D	H	K	3	4	5	6	7
0	7	8	9	10	11		


30° hinges
30°铝框铰链

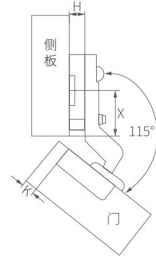

$H=K+A-6.5$

A	H	K	3	4	5	6	7
0	3.5	2.5	1.5	0.5	-0.5		

铰杯安装孔位尺寸 Installation hole location

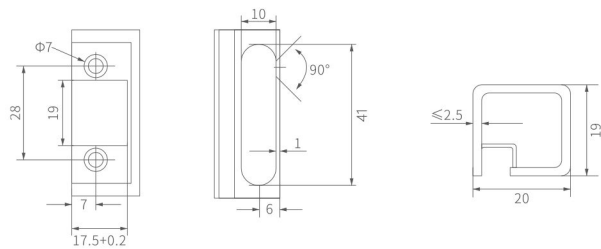

AG-630/645/690 铝框液压固装角度铰链 Aluminum frame hydraulic fixed angle hinge



颜色：枪黑色

铰杯材质：锌合金

工序：先镀铜再电泳

适用于铝框厚度：15-20mm

杯孔尺寸：28mm

杯直径：41mm

Color: gun black

Hinged cup material: zinc alloy

Procedure:

first copper plating and then electrophoresis

Suitable for aluminum frame thickness: 15-20mm

Cup hole size: 28mm


Cup diameter: 41mm

产品介绍 product description



底座安装孔位与盖位表 Installation hole location


Full Overlay
直臂



$H=0$ $K=5$ $D=18$

D	H	K	3	4	5	6	7
0	15	16	17	18	19		
3	12	13	14	15	16		
6	9	10	11	12	13		


Half Overlay
中弯



$H=0$ $K=5$ $D=9$

D	H	K	3	4	5	6	7
0	5.5	6.5	7.5	8.5	9.5		
3	2.5	3.5	4.5	5.5	6.5		
6	-0.5	0.5	1.5	2.5	3.5		


Inserted
大曲



$H=0$ $K=5$ $A=2$

A	H	K	3	4	5	6	7
9	5	4	3	2	1		

铰杯安装孔位尺寸 Installation hole location

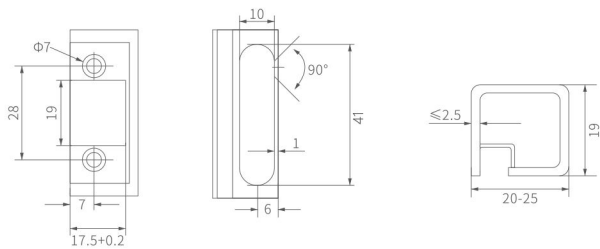

AG-6165 铝框液压固装角度铰链 Aluminum frame hydraulic fixed angle hinge



颜色：枪黑色

铰杯材质：锌合金

工序：先镀铜再电泳

适用于铝框厚度：15-20mm

杯孔尺寸：28mm

杯直径：41mm

Color: gun black

Hinged cup material: zinc alloy

Procedure:

first copper plating and then electrophoresis

Suitable for aluminum frame thickness:

15-20mm

Cup hole size: 28mm

Cup diameter: 41mm