




US-SPEC LIGHT TOWER

- Compact
- Efficient
- Built for the U.S. Market

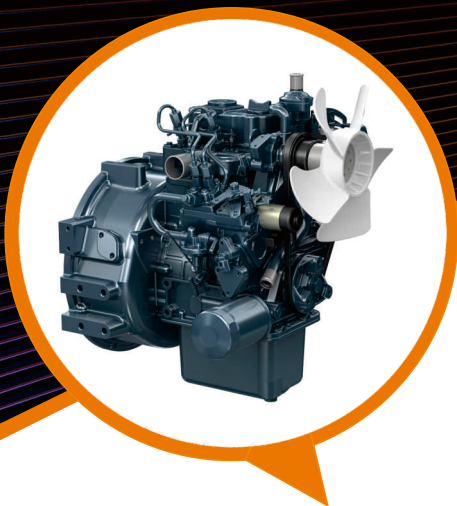

Kubota

LIGHTING
POWER
YOU
WHERE
YOU NEED
WHEN
NEED

TEXAS Series | X8000

Designed for lower transport height, higher loading efficiency and reliable performance in demanding jobsite applications.

- **Foldable Drawbar**
Compact & Easy Transport
- **Low-Profile Under-Mounted Lights**
Lower Transport Height
- **Side-by-Side Transport**
Higher Loading Efficiency
- **Reliable Power System**
Kubota Tier 4 Final · Mecc Alte Alternator



Built for Transport Efficiency & Jobsite Reliability

Foldable Drawbar

Compact & Easy Transport

Folds easily without disassembly for convenient transport and storage.

Low-Profile Under-Mounted Lights

Lower Transport Height

Reduces overall height for easier transportation through low-clearance areas.

Side-by-Side Transport

Higher Loading Efficiency

Allows two units to be loaded side by side, improving transport efficiency.

Reliable Power System

Kubota Tier 4 Final · Mecc Alte

Delivers dependable performance with proven engine and alternator.

High-Output LED Lighting

4 × 350W / 4 × 500W

Provides powerful, efficient lighting for various jobsite needs.

Flexible Mast Options

Manual / Hydraulic · 26'3" (8m)

Supports different applications with versatile mast configurations.



Kubota engine with Mecc Alte alternator

Standard Model		X8000		HX8100	
Towing Dimensions	Lengh*Width*Height	10' 1"(3,080mm)*4'(1,210mm)*8'6½"(2,600mm)			
Operating Dimensions	Lengh*Max.Width*Height	10' 1"(3,080mm)*8' 6¼"(2,610mm)*25'8"(7,830mm)		10' 1"(3,080mm)*8' 6¼"(2,610mm)*26'7"(8,100mm)	
Transport Sizes & Weight	Lengh*Width*Height	6' 5"(1,960mm)*4'(1,210mm)*8'4½"(2,550mm)			
	Gross Weight	1,851 lb (840kg)		1,984 lb (900kg)	
Vertical Mast	Structure	5-section tubular steel design			
	Actuation	Manual		Hydraulic Cylinder	
	Rotation	340° Manual with Lockable Pin			
	Light tilt	Manual			
	Max Wind Speed	68mph(110km/h)			
Lighting	LED	4*350W	4*500W	4*350W	4*500W
	Luminous Flux	210,000 Lumens	314,000 Lumens	210,000 Lumens	314,000 Lumens
Diesel Engine & Fuel Tank	Model	Kubota Z482-E4B			
	Fuel Consumption	0.198 U.S.gal/h (0.75L/h)	0.264 U.S. gal/hr(1.00 L/h)	0.198 U.S.gal/h (0.75L/h)	0.264 U.S. gal/hr (1.00 L/h)
	Max. Running Time	206 h	155 h	206 h	155 h
	Speed	1,800 rpm			
	Tank Capacity	41 U.S. Gal (155 Liters)			
Alternator	Model	Mecc Alte LT3N-130/4			
	Insulation	Class H			
	Voltage	240/120 VAC			
Trailer	Suspension & Brake	Leafspring axle without brake			
	Towing Bar	90° foldable			
	Stabilizers	4*jacks for front, rear & 2 sides			
	Wheel	14" rim with DOT tire			
	Towing Coupler	Swithable for 2 inch ball & 2½ inch pintle ring hitch			
	Trailer Lights	US standard tail lights			
	Max. Towing Speed	62 mph (100 km/h)			
General Data	Generator Output (Prime)	3KW/3KVA			
	Control System	Deepsea DSEL401			
	Noise Level dB(A) at 7m	66 dB(A)			
	Auxiliary Outlets	1pcs 2*20A/120V Receptacle			
Transport	Loading or Unloading	Top center lifting eye, 2 sides forklift pockets			
	Number in 40' High Cube	10			
	Number in 40' High Cube	13(Wheels, mudguard and Stabilizers have to be detached for loading)			
	Number on 48' Flatbed	14			
	Number on 53' Flatbed	16			

Specifications may vary based on configuration. Contact us for full details.

- Engineered for Reliable Performance
- Efficient Transport and Easy Operation



*Lighting Where You Need
Power When You Need*

APPLICATIONS

-  Construction Sites
-  Equipment Rental
-  Road & Civil Works
-  Oil & Gas Fields
-  Events & Outdoor Activities
-  Emergency & Temporary Lighting

WHY CHOOSE X8000?

- **Transport Efficiency**
Foldable Drawbar · Side-by-Side Loading
- **Low-Height Design**
Under-Mounted Lights
- **Proven Components**
Kubota · Mecc Alte
- **Flexible Configuration**
350W / 500W LED · Manual / Hydraulic Mast

GRANDWATT ELECTRIC CORP.

105 Professional Parkway, Suite 1502 Yorktown, VA 23693, USA

www.grandwatt.com

info@grandwatt.com

