



【S500-1G-1GX】

PARAMETER

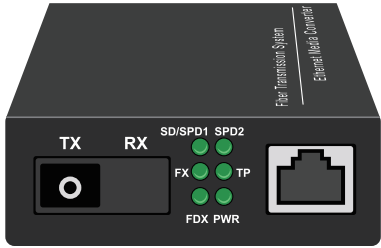

正面

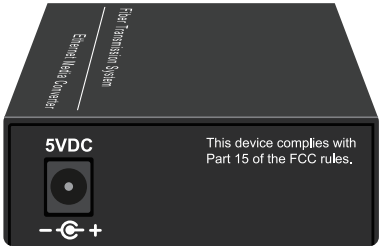

背面

Model	S500-1G-1GX
Product	Gigabit Ethernet 1+1 Fiber Switch
Fixed Port	1*10/100/1000Base-TX RJ45 port (Data) 1*1000M Integrated SFP (optional 1310/1550)
Network Protocol	IEEE 802.3 IEEE 802.3i 10BASE-T IEEE 802.3u100BASE-TX IEEE 802.3ab1000BASE-T IEEE 802.3x IEEE 802.3z 100BASE-X
Port Specification	10/100/1000BaseT (X) Auto
Transmission Mode	Store and Forward (full wirespeed)
Bandwidth	2Gbps
Packet Forwarding	4.32Mpps
MAC Address	2K
Buffer	2.5M
Transmission Distance	10BASE-T : Cat3,4,5 UTP(≤250 meter) 100BASE-TX : Cat5 or later UTP(150 meter) 1000BASE-TX : Cat6 or later UTP(150 meter) Single mode single fiber(MAX 20KM) Single mode double fiber (MAX 20KM) Multiple mode double fiber(MAX 850M/2KM) Optional 3-80KM SFP
Watt	≤3W
LED Indicator	PWR: Power LED SD/SPD1/FX:(Fiber optic signal LED) SPD2/TP:(Network signal LED) FDX:(Extension indicator)
Power	External Power DC: 12V 0.5A
Operating Temperature/Humidity	-10～+55℃;5%～90% RH Non coagulation
Storage Temperature/Humidity	-40～+75℃;5%～95% RH Non coagulation
Product size/Packing size (L*W*H)	70mm*95mm*25mm 105mm*105mm*65mm
N.W/G.W (kg)	0.2kg/0.3kg
Installation	Desktop
Lightning protection level	3KV 8/20us; IP30
Certificate	CE mark, commercial;CE/LVD EN60950; FCC Part 15 Class B;RoHS;
Warranty	Whole device for 1 year(Accessories not included)