



【S800-16F】
PARAMETER

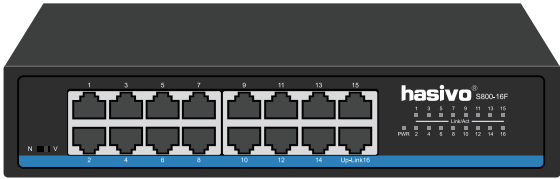

Front

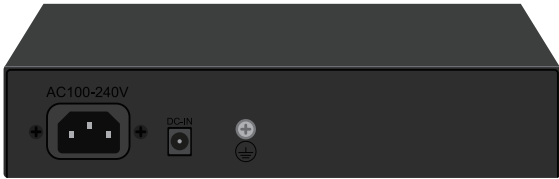

Back

Model	S800-16F
Product	16 Ports Fast Ethernet Switch
Fixed Port	16↑10/100M Base-TX RJ45 (Data)
Network Protocol	IEEE 802.3 IEEE 802.3i 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.1q
Function	N_Standard normal; V_Port isolation
Port Specification	10/100BaseT (X) Auto
Transmission Mode	Store and Forward (full wirespeed)
Bandwidth	4.8Gbps
Packet Forwarding	2.3Mpps
MAC Address	2K
Buffer	1.5M
Transmission Distance	10BASE-T : Cat3,4,5 UTP(≤250 meter) 100BASE-TX : Cat5 or later UTP(150 meter)
Watt	≤6W
LED Indicator	PWR:Power LED 1-16:(Link LED=10/100M Link)
Power	Built-in Power AC:100~240V 50-60Hz 1A
Operating Temperature/Humidity	-10~+55℃;5%~90% RH Non coagulation
Storage Temperature/Humidity	-40~+75℃;5%~95% RH Non coagulation
Product size/Packing size (L*W*H)	210mm*105mm*45mm 255mm*183mm*70mm
N.W/G.W (kg)	0.6kg/1kg
Installation	Desktop
Lightning protection level	3KV 8/20us; IP30
Certificate	CE mark, commercial;CE/LVD EN60950; FCC Part 15 Class B;RoHS;
Warranty	Whole device for 1 year(Accessories not included)