


【S800-8GV】
PARAMETER



Front

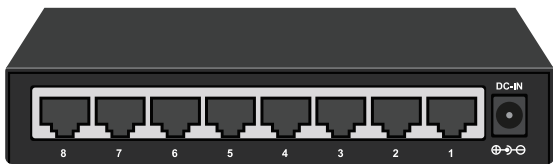

Back

Model	S800-8GV
Product	All Gigabit 8 Ports Ethernet Switch
Fixed Port	8*10/100/1000Base-TX RJ45 port (Data)
Network Protocol	IEEE 802.3 IEEE 802.3i 10BASE-T IEEE 802.3u100BASE-TX IEEE 802.3ab1000BASE-T IEEE 802.1q VLAN
Function	N_Standard normal; V_Port isolation
Port Specification	10/100/1000BaseT (X) Auto
Transmission Mode	Store and Forward (full wirespeed)
Bandwidth	16Gbps
Packet Forwarding	11.52Mpps
MAC Address	2K
Buffer	2.5M
Transmission Distance	10BASE-T : Cat3,4,5 UTP(≤250 meter) 100BASE-TX : Cat5 or later UTP(150 meter) 1000BASE-TX : Cat6 or later UTP(150 meter)
Watt	≤6W
LED Indicator	PWR:Power LED 1-8:(Link LED=10/100/1000M)
Power	External Power DC:12V 0.5A
Operating Temperature/Humidity	-10~+55℃; 5%~90% RH Non coagulation
Storage Temperature/Humidity	-40~+75℃; 5%~95% RH Non coagulation
Product size/Packing size (L*W*H)	138mm*80mm*25mm 215mm*175mm*45mm
N.W/G.W (kg)	0.3kg/0.5kg
Installation	Desktop (optional Wall hanger)
Lightning protection level	3KV 8/20us; IP30
Certificate	3C; CE mark, commercial; CE/LVD EN60950; FCC Part 15 Class B; RoHS;
Warranty	Whole device for 1 year(Accessories not included)