

### Overview

Place of Origin:	Jiangsu, China
Model Number:	1.56
Lenses Color:	Photogray/Brown
Vision Effect:	Flat Top
Corridor:	D28
Brand Name:	kingway
Certificate:	CE/ISO
Lenses Material:	NK55
Coating:	HC, HMC
Diameter:	70mm

Whatsapp,Skepe,Wechat, Email

### Packaging & Delivery


Selling Units:	Pairs
Single package size:	50X45X45 cm
Single gross weight:	About 22kgs
Package Type:	inner bag,out carton, export standard or upon your design
Lead Time :	Quantity(Pairs) 1 - 3000prs, 15days
	Quantity(Pairs) > 3000prs, To be negotiated


### Flat Top 1.56 Photochromic Gray Cr39 eyeglass Lenses AR Coating

Index	Corridor Length	Photochromic	Diamater
1.56	D28	Grey/Brown	65/70mm
Abbe	Specific Gravity	Transmission	Coating
38	1.20	0.97	HC,HMC/AR Coating

1) The most popular fused bifocal today has a D-shaped near segment rotated 90 degrees so that the flat part of the "D" is facing up. For this reason, D-seg bifocals also are called "flat-top" (FT) or "straight-top" (ST) bifocals.

2) This is a D segment bifocal lens. It has the benefit that the optical centre of the near vision part of the lens i.e. the part of the reading area which gives the very best vision, is situated at the top of the reading portion. Also the widest part of the reading area is just below the dividing line, and is the part of the lens the wearer would use

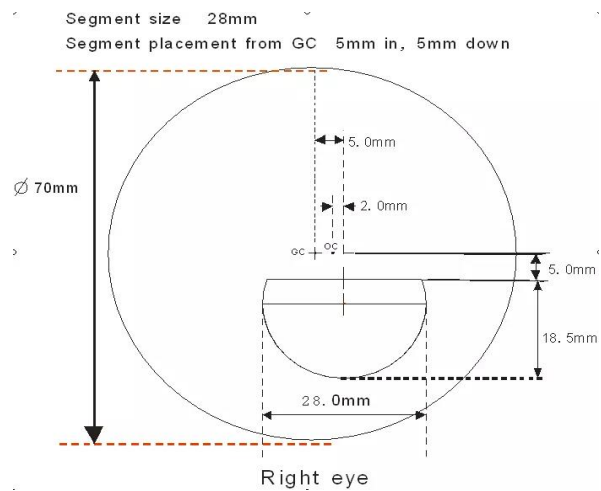

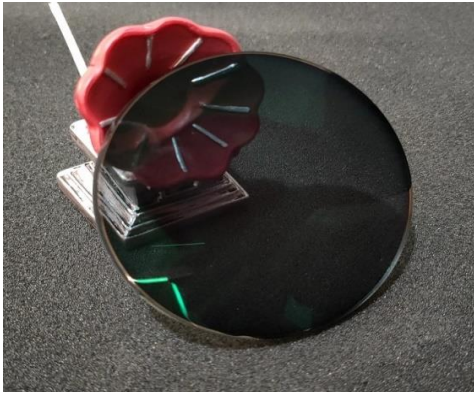

**Outstanding Color Performance..**


1. Fast speed of changing, from white to dark and vice versa.
2. Perfectly clear indoors and at night, adapting spontaneously to varying light conditions.
3. Very deep color after change, the deepest color can be up to 75~85%.
4. Excellent color consistency before and after change.

**AR Coating.**

--HC(hard coating): To protect the uncoated lenses from scratch resistance

--HMC(hard multi coated/AR coating): To protect the lens effectively from reflection, enhance functional and clarity of your vision

--SHMC(super hydrophobic coating): To make the lens waterproof, antistatic, anti slip and oil resistance.

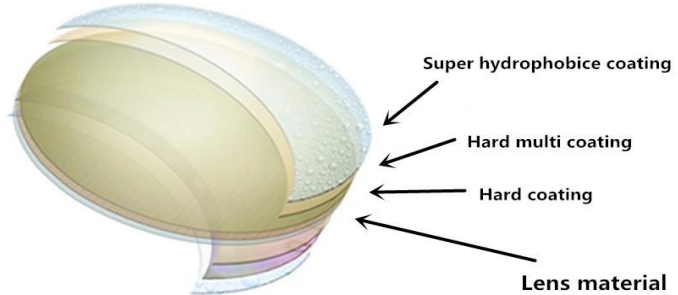

70/28MM FLAT-TOP BIFOCAL LENSES													
Sphere	Add									Power	CT/ET	FRONT CURVE	REAR CURVE
	+1.00	+1.25	+1.50	+1.75	+2.00	+2.25	+2.50	+2.75	+3.00				
+0.00										+0.00/ADD+1.00~+3.00	2.30/2.3	5.99	-5.99
+0.25										+0.25/ADD+1.00~+3.00	2.42/1.8	5.99	-5.73
+0.50										+0.50/ADD+1.00~+3.00	2.65/1.8	5.99	-5.46
+0.75										+0.75/ADD+1.00~+3.00	3.00/1.6	5.99	-5.2
+1.00										+1.00/ADD+1.00~+3.00	3.10/1.6	5.99	-4.94
+1.25										+1.25/ADD+1.00~+3.00	3.07/1.4	5.99	-4.67
+1.50										+1.50/ADD+1.00~+3.00	3.42/1.4	5.99	-4.41
+1.75										+1.75/ADD+1.00~+3.00	3.70/1.4	5.99	-4.14
+2.00										+2.00/ADD+1.00~+3.00	3.93/1.4	5.99	-3.88
+2.25										+2.25/ADD+1.00~+3.00	3.90/1.0	5.99	-3.62
+2.50										+2.50/ADD+1.00~+3.00	4.37/1.0	5.99	-3.35
+2.75										+2.75/ADD+1.00~+3.00	4.65/1.0	5.99	-3.09
+3.00										+3.00/ADD+1.00~+3.00	5.42/1.0	5.99	-2.83

SPH 1.499  
ø70MM

THE CURVATURES ARE CALCULATED IN INDEX 1.530

70/28MM FLAT-TOP BIFOCAL LENSES													
Sphere	Add									Power	CT/ET	FRONT CURVE	REAR CURVE
	+1.00	+1.25	+1.50	+1.75	+2.00	+2.25	+2.50	+2.75	+3.00				
-0.25										-0.25/ADD+1.00~+3.00	2.0±0.2	5.99	-6.27
-0.50										-0.50/ADD+1.00~+3.00	2.0±0.2	5.99	-6.55
-0.75										-0.75/ADD+1.00~+3.00	2.0±0.2	5.99	-6.83
-1.00										-1.00/ADD+1.00~+3.00	2.0±0.2	5.99	-7.1
-1.25										-1.25/ADD+1.00~+3.00	2.0±0.2	4.1	-5.5
-1.50										-1.50/ADD+1.00~+3.00	2.0±0.2	4.1	-5.78
-1.75										-1.75/ADD+1.00~+3.00	2.0±0.2	4.1	-6.06
-2.00										-2.00/ADD+1.00~+3.00	2.0±0.2	4.1	-6.33

SPH 1.499  
ø70MM

THE CURVATURES ARE CALCULATED IN INDEX 1.530