



Size:100*100*12mm

General Specifications:

Motor: 4 pole brushless DC motor

Frame: Thermoplastic PBT+30%GF

Impeller: Thermoplastic PBT+15%GF

Bearing: Precision Ball Bearing/Sleeve Bearing

Storage temperature: -40℃ to +75℃

Operating temperature:-10℃ to +70℃




Major Characteristic Parameters

Model	Bearing Type	Rated Voltage	Current	Speed	Air Flow	Pressure	Noise	Weight
型号	轴承类型	额定电压	电流	转速	风量	风压	噪音	重量
		VDC	A	RPM	CFM	mmH ₂ O	dBA	g
FD2410127S	Sleeve	24	0.20	2400	48.45	2.06	35.83	85
FD2410125S			0.15	2000	38.32	1.82	28.43	
FD2410123S			0.12	1600	30.12	1.45	22.5	
FD1210127S	Sleeve	12	0.3	2400	48.45	2.06	35.83	
FD1210125S			0.25	2000	38.32	1.82	28.43	
FD1210123S			0.20	1600	30.12	1.45	22.5	

* B: Two Ball bearing S: Sleeve Bearing * All reading are typical values at rated voltage

* Function type optional * Specifications are subject to change without notice

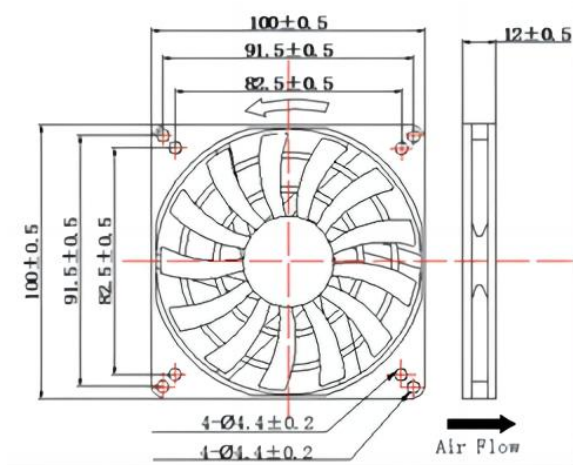

Characteristic Curve

