



Size:40*40*07mm

Geral Specifications:

Motor: 4 pole brushless DC motor

Frame: Thermoplastic PBT+30%GF

Impeller: Thermoplastic PBT+15%GF

Bearing: Precision Ball Bearing/Sleeve Bearing

Storage temperature: -40°C to +75°C

Operating temperature: -10°C to +70°C




Major Characteristic Parameters



MODEL	Bearing System	Rated Voltage (V)	Rated Current (A)	Input Power (W)	Speed (RPM)	Max Air Flow (CFM)	Max Static Pressure (mm H ₂ O)	Noise (dBA)	Weight (g)
FD1240077S(B)	S/B	12	0.12	1.44	8000	7.14	4.17	33.0	12
FD1240075S(B)	S/B	12	0.10	1.20	7000	6.01	3.25	31.0	12
FD1240073S(B)	S/B	12	0.08	0.96	6000	4.98	2.44	28.0	12
FD0540077S(B)	S/B	5	0.25	1.25	8000	7.14	4.17	33.0	12
FD0540075S(B)	S/B	5	0.22	1.1	7000	6.01	3.25	31.0	12
FD0540073S(B)	S/B	5	0.20	1.0	6000	4.98	2.44	28.0	12

* B: Two Ball bearing S: Sleeve Bearing * All readings are typical values at rated voltage

* Function type optional * Specifications are subject to change without notice

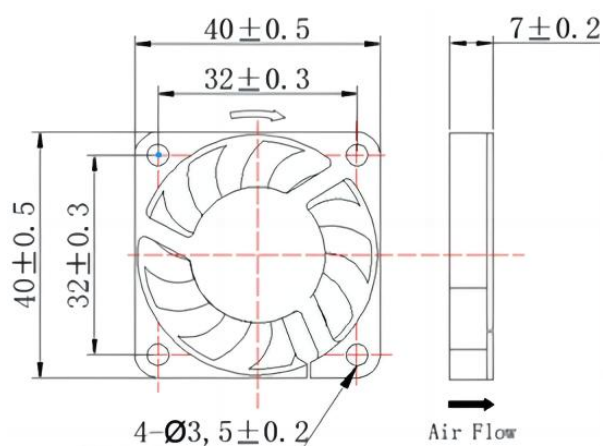

Characteristic Curve

