



Size:60*60*10mm

General Specifications:

Motor: 4 pole brushless DC motor

Frame: Thermoplastic PBT+30%GF

Impeller: Thermoplastic PBT+15%GF

Bearing: Precision Ball Bearing/Sleeve Bearing

Storage temperature: -40℃ to +75℃

Operating temperature:-10℃ to +70℃




Major Characteristic Parameters



MODEL	Bearing System	Rated Voltage (V)	Rated Current (A)	Input Power (W)	Speed (RPM)	Max Air Flow (CFM)	Max Static Pressure (mm H2O)	Noise (dBA)	Weight (g)
FD1260107S(B)	S/B	12	0.22	2.64	5000	20.24	3.92	33.0	25
FD1260105S(B)	S/B	12	0.15	1.80	4500	19.11	3.55	31.0	25
FD1260103S(B)	S/B	12	0.12	1.44	4000	16.81	2.82	28.0	25
FD1260101S(B)	S/B	12	0.10	1.20	3500	13.46	2.12	25.0	25
FD2460107S(B)	S/B	24	0.14	3.36	5000	20.24	3.92	33.0	25
FD2460105S(B)	S/B	24	0.11	2.64	4500	19.11	3.55	31.0	25
FD2460103S(B)	S/B	24	0.09	2.16	4000	16.81	2.82	28.0	25
FD2460101S(B)	S/B	24	0.08	1.92	3500	13.46	2.12	25.0	25

* B: Two Ball bearing S: Sleeve Bearing * All reading are typical values at rated voltage

* Function type optional * Specifications are subject to change without notice

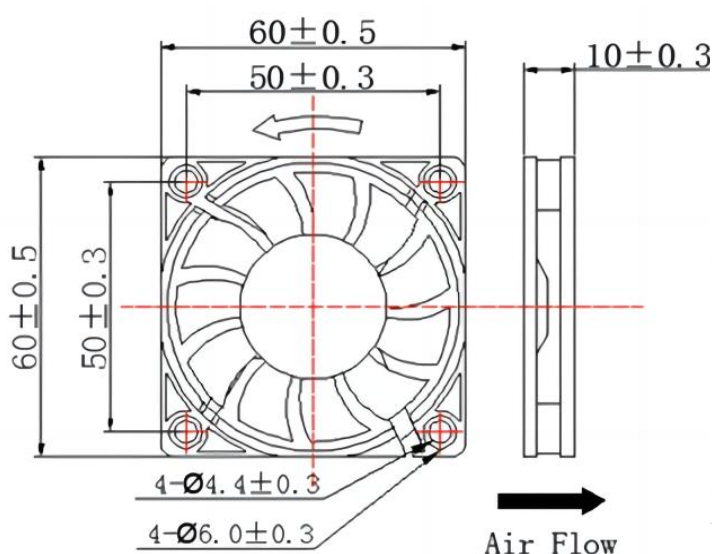

Characteristic Curve

