



Size: 70*70*10mm

General Specifications:

Motor: 4 pole brushless DC motor

Frame: Thermoplastic PBT+30%GF

Impeller: Thermoplastic PBT+15%GF

Bearing: Precision Ball Bearing/Sleeve Bearing

Storage temperature: -40°C to +75°C

Operating temperature: -10°C to +70°C




Major Characteristic Parameters



Model 型号	Bearing Type 轴承类型	Rated Voltage 额定电压	Current 电流	Speed 转速	Air flow 风量	Pressure 风压	Noise 噪音	Weight 重量
		VDC	A	RPM	CFM	mmH2O	dBA	g
FD2470107S/B	Sleeve/Ball	24	0.11	3500	19.13	2.65	32.6	27
FD2470105S/B			0.09	3000	16.39	2.48	27.9	
FD2470103S/B			0.07	2500	13.31	1.28	23.9	
FD1270107S/B	Sleeve/Ball	12	0.2	3500	19.13	2.65	32.6	
FD1270105S/B			0.14	3000	16.39	2.48	27.9	
FD1270103S/B			0.1	2500	13.31	1.28	23.9	

* B: Two Ball bearing S: Sleeve Bearing * All reading are typical values at rated voltage

* Function type optional * Specifications are subject to change without notice

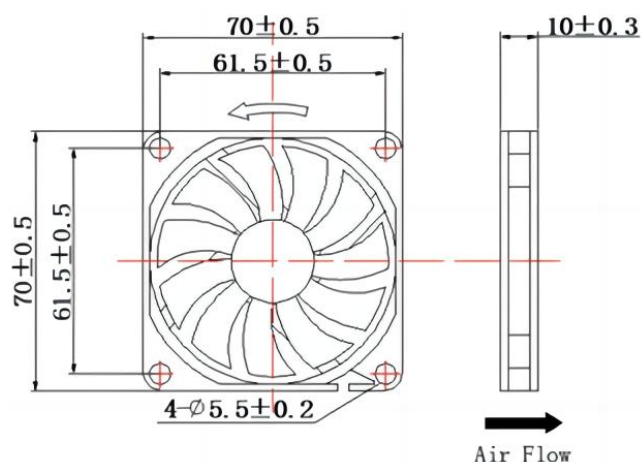

Characteristic Curve

