



Size:120*120*25mm

General Specifications:

- Die-cast aluminum housing
- Metal impeller or Class fiber reinforced plastic:
Impeller are UL 94V-0 rating
- Shaded pole motor
- Impedance protected
- Bearing: Precision Ball Bearing/Sleeve Bearing
- Storage temperature: -40°C to +75°C
- Operating temperature: -10°C to +70°C




Specifications

Model 型号	Bearing System 轴承	Rated Voltage (V) 电压	Freq. (Hz) 频率	Current (A) 电流	Input Power (W) 功率	Speed (RPM) 转速	Air Flow (CFM) 风量	Static Pressure (mm-H ₂ O) 静压	Noise Level (dB-A) 噪音	Weight (g) 重量
12025HS/B1	Sleeve/Ball	110	50/60	0.15/0.14	13.0/11.0	2300/2700	35/37	3.80/5.0	36/38	320
12025MS/B1		110	50/60	0.11/0.10	13.0/11.0	1800/2400	30/35	1.80/2.0	30/36	
12025HS/B2		220	50/60	0.09/0.08	18.0/14.0	2300/2700	35/37	3.80/5.0	36/38	
12025MS/B2		220	50/60	0.06/0.05	18.0/14.0	1800/2400	30/35	1.80/2.0	30/36	

* B: Two Ball bearing S: Sleeve Bearing * All reading are typical values at rated voltage

* Function type optional * Specifications are subject to change without notice

★Dimensions Drawing(外观图)

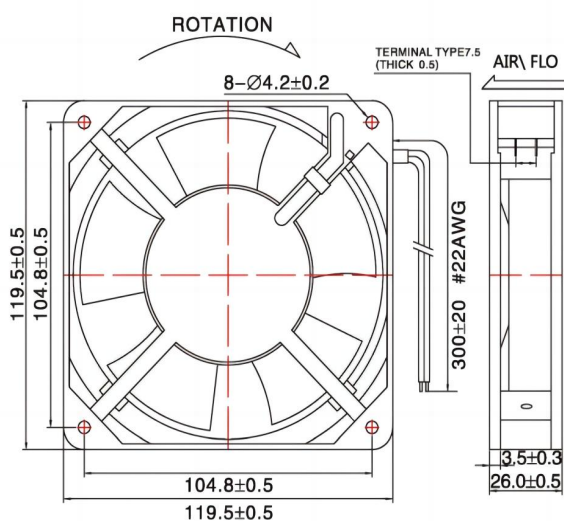

★Characteristic Curves(特性曲线)

