



Size:150*150*50mm

General Specifications:

- Die-cast aluminum housing
- Metal impeller or Class fiber reinforced plastic:
Impeller are UL 94V-0 rating
- Shaded pole motor
- Impedance protected
- Bearing: Precision Ball Bearing/Sleeve Bearing
- Storage temperature: -40°C to +75°C
- Operating temperature:-10°C to +70°C




Specifications

Model 型号	Bearing System 培林	Rated Voltage (V) 电压	Freq (Hz) 频率	Current (A) 电流	Input Power (W) 功率	Speed (RPM) 转速	Air Flow (CFM) 风量	Static Pressure (mm-H ₂ O) 静压	Noise Level (dB-A) 噪音	Weight (g) 重量
15050HS/B1	Sleeve/Ball	110	50/60	0.46/0.44	38/36	2600/3000	170/196	11.5/14.0	49/56	800
15050MS/B1		110	50/60	0.33/0.30	28/27	2400/2600	155/170	7.5/9.7	45/49	
15050LS/B1		110	50/60	0.15/0.13	21/20	2100/2400	137/155	3.0/3.9	39/45	
15050HS/B2		220	50/60	0.25/0.22	38/39	2600/3000	170/196	11.5/14.0	49/56	
15050MS/B2		220	50/60	0.18/0.16	28/27	2400/2600	155/170	7.5/9.7	45/49	
15050LS/B2		220	50/60	0.13/0.11	21/20	2100/2400	137/155	3.0/3.9	39/45	
15050HS/B3		380	50/60	0.15/0.13	38/36	2600/3000	170/196	11.5/14.0	49/56	

* B: Two Ball bearing S: Sleeve Bearing * All reading are typical values at rated voltage

* Function type optional * Specifications are subject to change without notice

★Dimensions Drawing(外观图)

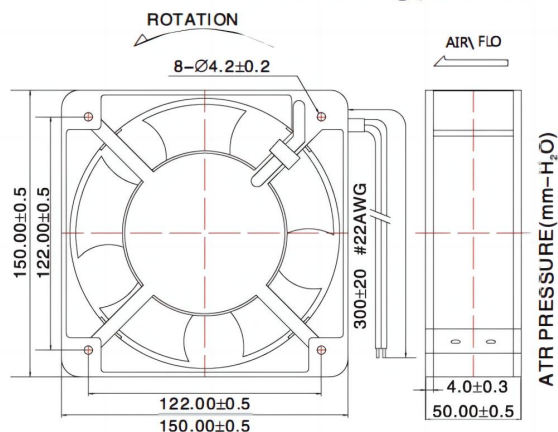

★Characteristic Curves(特性曲线)

