



Size: 180*180*60 mm

General Specifications:

- Die-cast aluminum housing
- Metal impeller or Class fiber reinforced plastic:
Impeller are UL 94V-0 rating
- Shaded pole motor
- Impedance protected
- Bearing: Precision Ball Bearing/Sleeve Bearing
- Storage temperature: -40°C to +75°C
- Operating temperature: -10°C to +70°C




Specifications

Model 型号	Bearing System 轴承	Rated Voltage (V) 电压	Freq (Hz) 频率	Current (A) 电流	Input Power (W) 功率	Speed (RPM) 转速	Air Flow (CFM) 风量	Static Pressure (mm-H ₂ O) 静压	Noise Level (dB-A) 噪音	Weight (g) 重量
18060HB1	Ball	110	60	0.69	56	2600	280	13.18	59	1600
18060HB2		220	50	0.30	45	2600	280	13.18	59	
18060HB3		380	50	0.16	42	2550	275	13.10	59	

* B: Two Ball bearing S: Sleeve Bearing * All reading are typical values at rated voltage

* Function type optional * Specifications are subject to change without notice

★Dimensions Drawing(外观图)

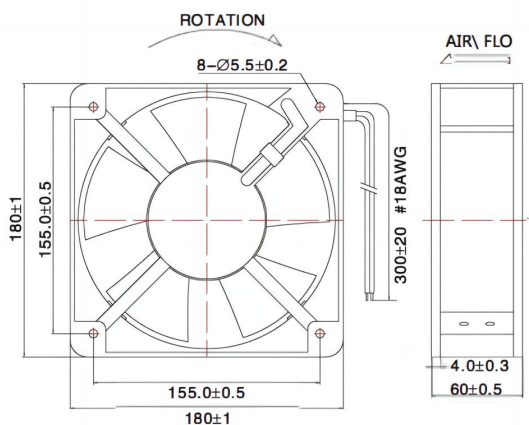

★Characteristic Curves(特性曲线)

