



Size: $\varnothing 254 \times 89 \text{mm}$

General Specifications:

- Die-cast aluminum housing
- Metal impeller or Class fiber reinforced plastic:
Impeller are UL 94V-0 rating
- Shaded pole motor
- Impedance protected
- Bearing: Precision Ball Bearing/Sleeve Bearing
- Storage temperature: -40°C to $+75^{\circ}\text{C}$
- Operating temperature: -10°C to $+70^{\circ}\text{C}$




Specifications

MODEL	Bearing System	Rated Voltage (V)	Frequency (HZ)	Rated Current (A)	Input Power (W)	Speed (RPM)	Max Air Flow (CFM)	Max Static Pressure (mm H ₂ O)	Noise (dBA)	Weight (g)
25489HS(B)1	S/B	110	50/60	0.23/0.23	26/23	1400/1700	600/665	6.86/9.15	52/55	2100
25489HS(B)2	S/B	220	50/60	0.24/0.27	56/60	1900/2100	770/850	9.65/10.10	55/58	2100
25489HS(B)3	S/B	380	50	0.12	40	1400	600	6.86	52	2100

* B: Two Ball bearing S: Sleeve Bearing * All reading are typical values at rated voltage

* Function type optional * Specifications are subject to change without notice

★Dimensions Drawing(外观图)

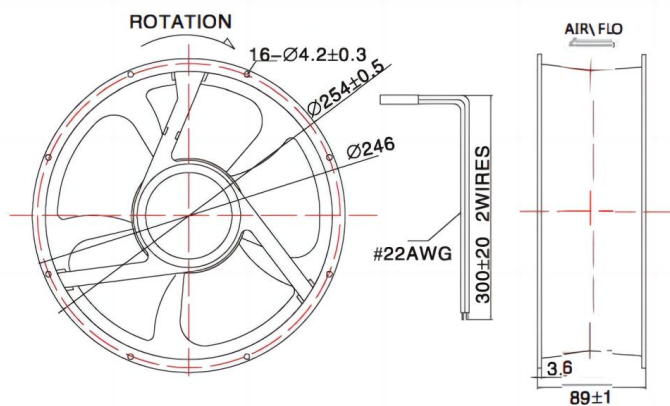

★Characteristic Curves(特性曲线)

