



Size:92*92*38mm

General Specifications:

- Die-cast aluminum housing
- Metal impeller or Class fiber reinforced plastic:
Impeller are UL 94V-0 rating
- Shaded pole motor
- Impedance protected
- Bearing: Precision Ball Bearing/Sleeve Bearing
- Storage temperature: -40°C to +75°C
- Operating temperature:-10°C to +70°C




Specifications

Model 型号	Bearing System 轴承	Rated Voltage (V) 电压	Freq. (Hz) 频率	Current (A) 电流	Input Power (W) 功率	Speed (RPM) 转速	Air Flow (CFM) 风量	Static Pressure (mm-H ₂ O) 静压	Noise Level (dB-A) 噪音	Weight (g) 重量
9238HS/B1	Sleeve/Ball	110	50/60	0.15/0.13	17.0/15.0	2400/2800	39/46	3.60/5.20	34/36	340
9238MS/B1		110	50/60	0.11/0.10	13.0/10.0	1900/2400	35/39	2.90/3.20	27/34	
9238HS/B2		220	50/60	0.08/0.07	17.0/15.0	2400/2800	39/46	3.60/5.20	34/36	
9238MS/B2		220	50/60	0.06/0.05	13.0/10.0	1900/2400	35/39	2.90/3.20	27/34	

* B: Two Ball bearing S: Sleeve Bearing * All reading are typical values at rated voltage

* Function type optional * Specifications are subject to change without notice

★ Dimensions Drawing(外观图)

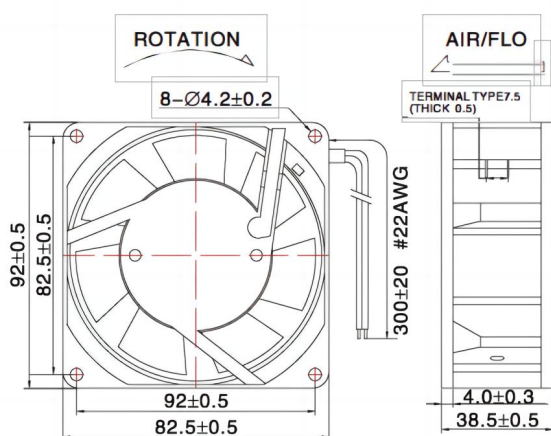

★ Characteristic Curves(特性曲线)

