




Size:40*40*20 mm

General Specifications:

- Motor: 4 pole brushless DC motor
- Frame: Thermoplastic PBT+30%GF
- Impeller: Thermoplastic PBT+15%GF
- Bearing: Precision Ball Bearing/Sleeve Bearing
- Storage temperature: -40°C to +75°C
- Operating temperature: -10°C to +70°C

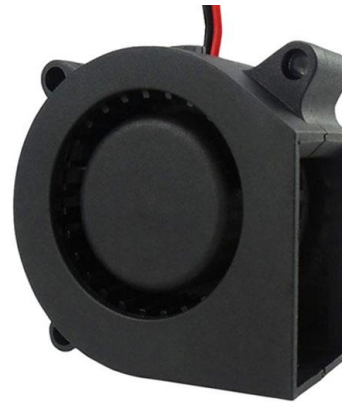


Major Characteristic Parameters



Model 型号	Bearing Type 轴承类型	Rated Voltage 额定电压	Current 电流	Speed 转速	Air Flow 风量	Pressure 风压	Noise 噪音	Weight 重量
		VDC	A	RPM	CFM	mmH ₂ O	dBA	g
BD0540207S/B	S/B	5	1.25	5500	2.54	18.10	41.0	25
BD0540205S/B			0.80	4500	2.08	11.20	32.0	
BD0540203S/B			0.60	3500	1.62	7.00	27.0	
BD1240207S/B		12	2.16	6500	2.97	22.00	45.0	
BD1240205S/B			1.80	5500	2.54	18.10	41.0	
BD1240203S/B			1.32	4500	2.08	11.20	32.0	
BD1240201S/B			1.08	3500	1.62	7.00	27.0	

* B: Two Ball bearing S: Sleeve Bearing * All reading are typical values at rated voltage
 * Function type optional * Specifications are subject to change without notice

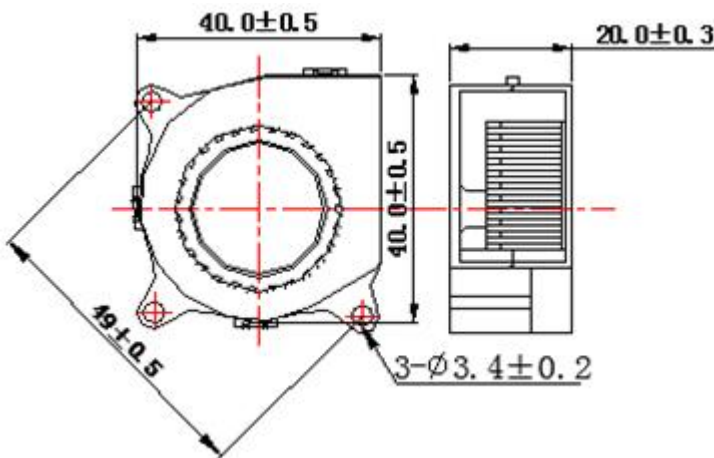

Characteristic Curve

