



Size:50*50*10 mm

General Specifications:

Motor: 4 pole brushless DC motor

Frame: Thermoplastic PBT+30%GF

Impeller: Thermoplastic PBT+15%GF

Bearing: Precision Ball Bearing/Sleeve Bearing

Storage temperature: -40℃ to +75℃

Operating temperature: -10℃ to +70℃




Major Characteristic Parameters

Model 型号	Bearing Type 轴承类型	Rated Voltage	Current	Speed	Air Flow	Pressure	Noise	Weight
		额定电压	电流	转速	风量	风压	噪音	重量
		VDC	A	RPM	CFM	mmH ₂ O	dBA	g
BD1250107S/B	S/B	12	0.09	5800	2.7	8.64	37	21
BD1250105S/B			0.07	5000	2.3	6.36	31.1	
BD1250103S/B			0.06	4000	1.79	4.06	26.7	
BD0550107S/B		5	0.09	5000	2.3	6.36	31.1	
BD0550105S/B			0.07	4000	1.79	4.06	26.7	

* B: Two Ball bearing S: Sleeve Bearing * All reading are typical values at rated voltage

* Function type optional * Specifications are subject to change without notice

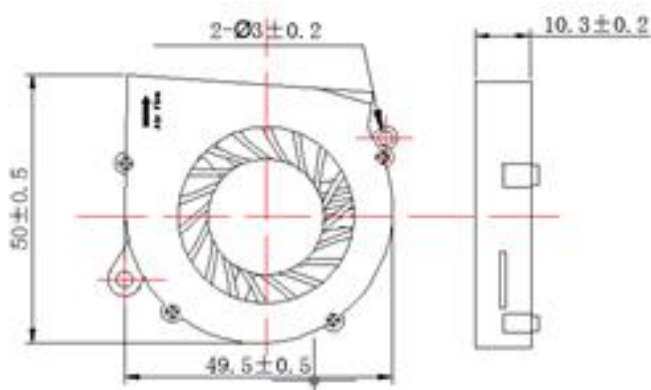

Characteristic Curve

