



Size: 50*50*20 mm

General Specifications:

Motor: 4 pole brushless DC motor

Frame: Thermoplastic PBT+30%GF

Impeller: Thermoplastic PBT+15%GF

Bearing: Precision Ball Bearing/Sleeve Bearing

Storage temperature: -40℃ to +75℃

Operating temperature: -10℃ to +70℃




Major Characteristic Parameters



Model 型号	Bearing Type 轴承类型	Rated Voltage 额定电压	Current 电流	Speed 转速	Air Flow 风量	Pressure 风压	Noise 噪音	Weight 重量
		VDC	A	RPM	CFM	mmH ₂ O	dBA	g
BD2450207S/B	S/B	24	0.13	6000	5.8	21.3	42.2	32
BD2450205S/B			0.09	5000	4.5	11.7	39.1	
BD2450203S/B			0.05	4000	3.4	6.3	31.5	
BD1250207S/B		12	0.25	6000	5.8	21.3	42.2	
BD1250205S/B			0.16	5000	4.5	11.7	39.1	
BD1250203S/B			0.09	4000	3.4	6.3	31.5	
BD0550207S/B		5	0.50	6000	5.8	21.3	42.2	
BD0550205S/B			0.32	5000	4.5	11.7	39.1	
BD0550203S/B			0.18	4000	3.4	6.3	31.5	

* B: Two Ball bearing S: Sleeve Bearing * All reading are typical values at rated voltage

* Function type optional * Specifications are subject to change without notice

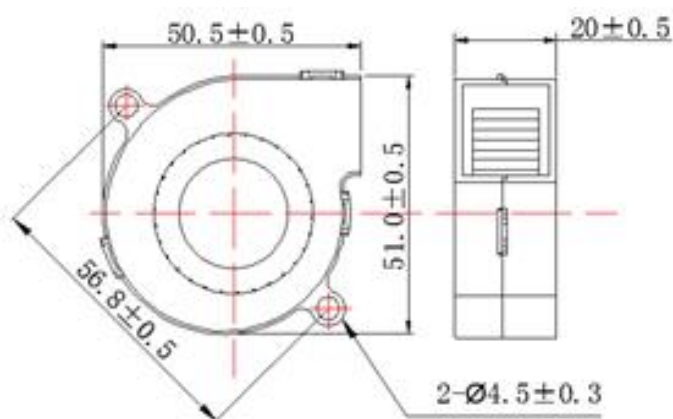

Characteristic Curve

