



Size: 75*75*15 mm

General Specifications:

Motor: 4 pole brushless DC motor

Frame: Thermoplastic PBT+30%GF

Impeller: Thermoplastic PBT+15%GF

Bearing: Precision Ball Bearing/Sleeve Bearing

Storage temperature: -40℃ to +75℃

Operating temperature: -10℃ to +70℃




Major Characteristic Parameters



Model 型号	Bearing Type 轴承类型	Rated Voltage 额定电压	Current 电流	Speed 转速	Air Flow 风量	Pressure 风压	Noise 噪音	Weight 重量
		VDC	A	RPM	CFM	mmH ₂ O	dBA	g
BD2475159S/B	S/B	24	0.25	4200	9.5	29.3	47.2	50
BD2475157S/B			0.18	3800	8.1	21.5	41.8	
BD2475155S/B			0.14	3200	6.9	14.3	36.5	
BD2475153S/B			0.09	2500	5.7	9.1	29.7	
BD1275159S/B		12	0.45	4200	9.5	29.3	47.2	
BD1275157S/B			0.35	3800	8.1	21.5	41.8	
BD1275155S/B			0.23	3200	6.9	14.3	36.5	
BD1275153S/B			0.14	2500	5.7	9.1	29.7	
BD0575157S/B		5	0.65	3600	7.5	18.8	39.8	
BD0575155S/B			0.45	3200	6.9	14.3	36.5	
BD0575153S/B			0.30	2500	5.7	9.1	29.7	

* B: Two Ball bearing S: Sleeve Bearing * All reading are typical values at rated voltage

* Function type optional * Specifications are subject to change without notice

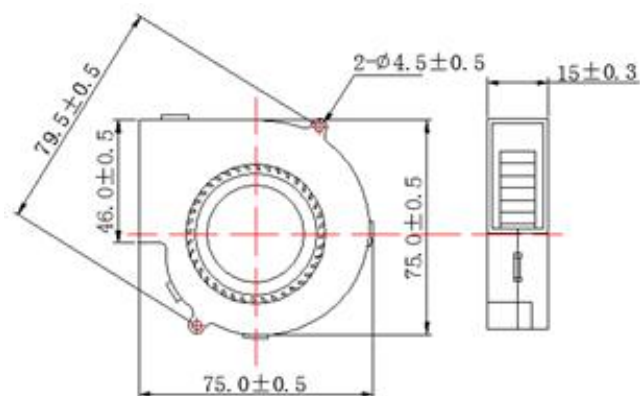

Characteristic Curve

