



Size:75*75*25 mm

General Specifications:

Motor: 4 pole brushless DC motor

Frame: Thermoplastic PBT+30%GF

Impeller: Thermoplastic PBT+15%GF

Bearing: Precision Ball Bearing/Sleeve Bearing

Storage temperature: -40℃ to +75℃

Operating temperature: -10℃ to +70℃




Major Characteristic Parameters



Model 型号	Bearing Type 轴承类型	Rated Voltage 额定电压	Current 电流	Speed 转速	Air Flow 风量	Pressure 风压	Noise 噪音	Weight 重量
		VDC	A	RPM	CFM	mmH ₂ O	dBA	g
BD2475259S/B	S/B	24	0.18	4200	13.1	15.3	43.2	58
BD2475257S/B			0.15	3500	12.1	14.1	39.5	
BD2475255S/B			0.13	3000	11	11.95	36.5	
BD2475253S/B			0.09	2500	9.3	7.8	31.5	
BD1275259S/B		12	0.35	4200	13.1	15.3	43.2	
BD1275257S/B			0.3	3500	12.1	14.1	39.5	
BD1275255S/B			0.26	3000	11	11.95	36.5	
BD1275253S/B			0.18	2500	9.3	7.8	31.25	

* B: Two Ball bearing S: Sleeve Bearing * All reading are typical values at rated voltage

* Function type optional * Specifications are subject to change without notice

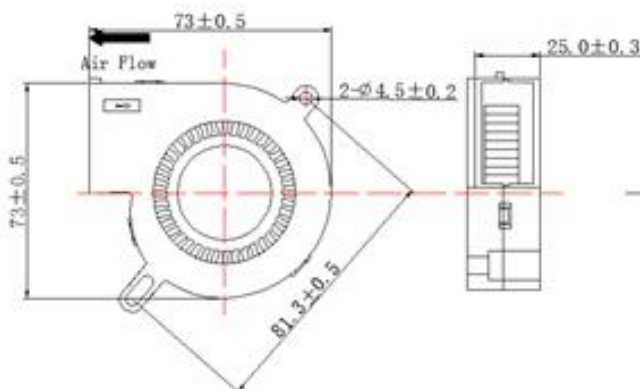

Characteristic Curve

