



Size:75*75*30mm

General Specifications:

Motor: 4 pole brushless DC motor

Frame: Thermoplastic PBT+30%GF

Impeller: Thermoplastic PBT+15%GF

Bearing: Precision Ball Bearing/Sleeve Bearing

Storage temperature: -40℃ to +75℃

Operating temperature: -10℃ to +70℃




Major Characteristic Parameters



Model 型号	Bearing Type 轴承类型	Rated Voltage 额定电压	Current 电流	Speed 转速	Air Flow 风量	Pressure 风压	Noise 噪音	Weight 重量
		VDC	A	RPM	CFM	mmH ₂ O	dBA	g
BD2475309S/B	S/B	24	0.30	4200	13.4	11.57	40.0	76
BD2475307S/B			0.16	3000	10.3	8.89	38.5	
BD2475305S/B			0.13	2500	7.5	5.35	33.6	
BD2475303S/B			0.10	2000	6.0	3.42	26.8	
BD1275309S/B		12	0.50	4200	13.4	11.57	40.0	
BD1275307S/B			0.32	3000	10.3	8.89	38.5	
BD1275305S/B			0.20	2500	7.5	5.35	33.6	
BD1275303S/B			0.16	2000	6.0	3.42	26.8	
BD0575307S/B		5	0.50	3000	10.3	8.89	38.5	
BD0575305S/B			0.28	2500	7.5	5.35	33.6	
BD0575303S/B			0.18	2000	6.0	3.42	26.8	

* B: Two Ball bearing S: Sleeve Bearing * All reading are typical values at rated voltage

* Function type optional * Specifications are subject to change without notice

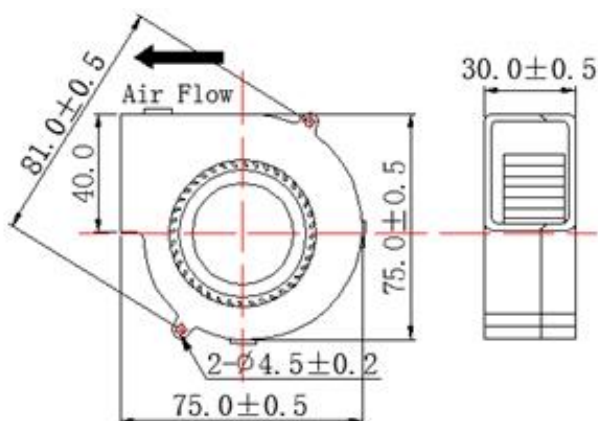

Characteristic Curve

